

NTY6FK

High Energy-optimized Compressor

R134a

115V 60Hz

SECOP

General

Code number	105G5621
Approvals	UL984
Compressors on pallet	80

Application

Application	LBP			
Frequency	Hz	50	60	
Evaporating temperature	°F	–	-31 to 14	
Voltage range	V	–	103 - 127	
Max. condensing temperature continuous (short)	°F	–	140 (158)	
Max. winding temperature continuous (short)	°F	–	257 (275)	

Cooling requirements

Frequency	Hz	50			60		
Application		LBP	MBP	HBP	LBP	MBP	HBP
90°F		–	–	–	S	–	–
100°F		–	–	–	S	–	–
110°F		–	–	–	S	–	–
Remarks on application: Below 10°F only for 115V 60Hz nominal.							

Motor


Motor type	RSCR			
LRA (rated after 4 sec. UL984), HST LST	A	–	10.5	
Cut in Current, HST LST	A	–	20.4	
Resistance, main start winding (77°F)	Ω	3.1	4.0	

Design


Displacement	cu.in	0.40
Oil quantity (type)	fl.oz.	9.9 (polyolester)
Maximum refrigerant charge	oz.	14.0
Free gas volume in compressor	fl.oz.	79.7
Weight without electrical equipment	lbs.	23.8

Dimensions

Height	inch	A	8.00
		B	7.76
		B1	–
		B2	–
Suction connector	location, I.D. in. angle	C	0.320-0.327 15°
	material comment		Cu-plated steel Rubber plug
Process connector	location, I.D. in. angle	D	0.252-0.259 25°
	material comment		Cu-plated steel Rubber plug
Discharge connector	location, I.D. in. angle	E	0.252-0.259 35°
	material comment		Cu-plated steel Rubber plug
Oil cooler connector	location, I.D. in. angle	F	–
	material comment		–
Remarks:			

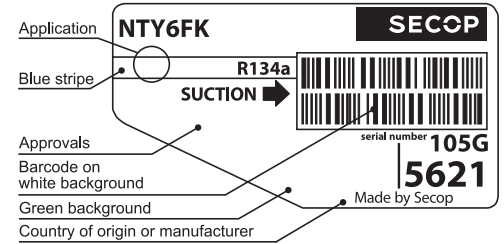

- S = Static cooling normally sufficient
- O = Oil cooling
- F₁ = Fan cooling 1.5 m/s (compressor compartment temperature equal to ambient temperature)
- F₂ = Fan cooling 3.0 m/s necessary
- SG = Suction gas cooling normally sufficient
- = not applicable in this area

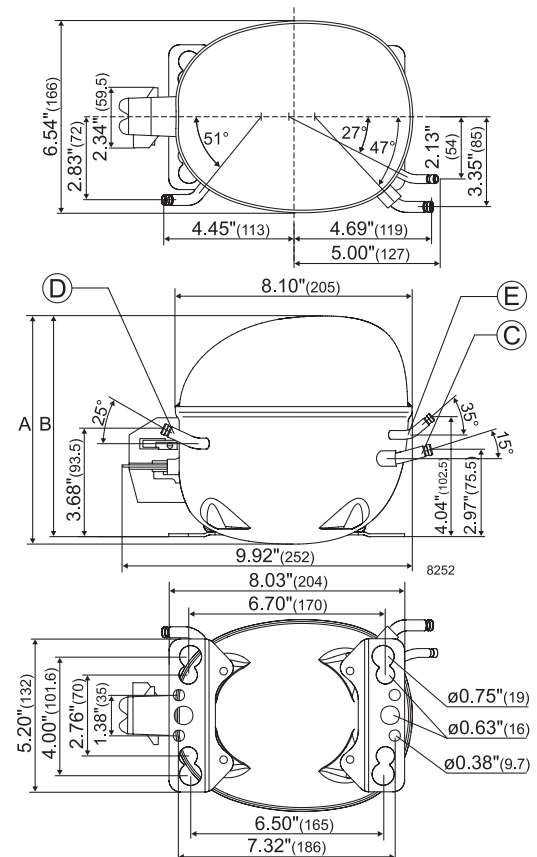

Static cooling, with RC 15μF, 115V 60Hz, PTC consumption incl.

EN 12900 Household (CECOMAF) Static cooling, with RC 15μF, 115V 60Hz, PTC consumption incl.

The diagram illustrates the assembly of the motor protector and the corresponding wiring. The top part shows the physical components: a motor protector (b), a cable (e), a terminal block (a1), a switch (f), and a component labeled 8233. The bottom part is a wiring diagram showing the connection of the motor protector to the motor. The diagram includes labels for the 'Main winding', 'Start winding', and 'Motor protector'. The wiring diagram shows the motor protector connected to the main winding and the start winding, with a switch (f) controlling the start winding. The motor protector is also connected to the main winding and the start winding. The diagram shows the motor protector connected to the main winding and the start winding, with a switch (f) controlling the start winding. The motor protector is also connected to the main winding and the start winding.

Secop can accept no responsibility for possible errors in catalogues, brochures and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed.

All trademarks in this material are property of the respective companies. Secop and the Secop lootype are trademarks of Secop GmbH. All rights reserved. www.secop.com