Single
Packs

SECOP

Single Pack KLF6.6GFHX 115-127V 60Hz CSIR

Single pack code number: **195B4854**

Position	Title	Code	Amount
1	Compressor KLF6.6GFHX	106G6712	1
2	Bolt joint for one compressor | M6 | ø16mm	118-1917	1
Below electrical equipment is pre-assembled on the compressor:			
3	Starting relay (QLZ-11.6A, overload protector T1246/L6)	117U7080	1
4	Starting capacitor (240µF 125V, 6.3mm)	117U5002	1
5	Cable clamp	16058100	1
6	Screw for cable clamp	10636000	1
7	Screw for cable clamp	10636200	1
8	Cover	10636401	1
9	Earth screw	10641201	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • **www.secop.com**

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

型号

KLF6.6GFHX

采购代码:

106G6712

压缩机数据

制冷剂	**R134a / R513A**
制冷剂最大充注量	**300g / 10.58oz**
重量	**9.20 kg / 20.28lbs**
排气量	**6.60 cm3 / 0.40cu.in**
每托盘压缩机数量	**100**



基本信息 KLF6.6GFHX

–	**Conf. 1**
启动方式	CSIR
供电电源 (标称)	115-120 V/60 Hz
电机相数	1
电压范围	103-135 V
认证	UL
启动力矩	HST
制冷剂	R134a
应用	LBP+MBP+HBP
热气除霜	OK
长时间高负荷运行	OK

应用说明

- 电气设备包含在内并已预装在压缩机上
- 保护接地（PE）端子位于压缩机上的 PE 冲压标记处

型号
KLF6.6GFHX

采购代码:
106G6712

设计信息


润滑油类型	**POE**	主绕组阻值	**2 Ohm**
润滑油黏度	**9,7cSt**	辅绕组阻值	**8.5 Ohm**
润滑油注油量	**173 cm3 / 5.85fl.oz**	最高绕组温度	**125 °C**
壳体内自由空间容积	**1,580 cm3 / 53.43fl.oz**	最高排气温度	**130°C / 266°F**
保护器类型	**外置**		

尺寸信息

壳体


A 高度	**182mm / 7.17in**
B 高度	**175mm / 6.89in**
C 外壳长度	**198mm / 7.80in**
D 长度（含保护罩）	**238mm / 9.37in**
E 宽度	**160mm / 6.30in**

在此查找 3D 模型




连接管	吸气管 X	排气管 Y	工艺管 Z
直径 [mm]	øi 8.11–8.29 / 0.32–0.33in	øi 6.41–6.59 / 0.25–0.26in	øi 6.41–6.59 / 0.25–0.26in
材料	CU	CU	CU
水平角度 ±2°	35°	13°	0°
垂直角度 ±2°	30°	40°	145°
位置 l/h/w [mm]	119/73/59 / 4.69/2.87/2.32in	117/107/66 / 4.61/4.21/2.60in	-88/101/71 / -3.46/3.98/2.80in
直管长度 [mm]	13.5 / 0.53in	13.5 / 0.53in	13.5 / 0.53in

安装附件

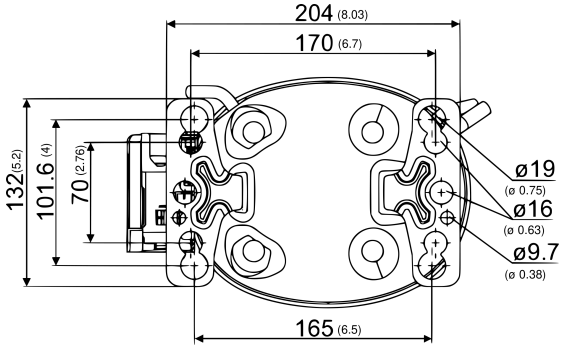


单位：mm [in]

螺栓式



插片式



	单台包装	批量包装
螺栓式 | M6 | ø16mm	118-1917	118-1918
螺栓式 | ø1/4" | ø16mm	118-1946	–
螺栓式 | ø1/4" | ø19mm	118-1949	–
插片式 | ø7,3 | ø16mm	118-1947	118-1919

型号

KLF6.6GFHX 配置 1

采购代码:

106G6712

配置

启动方式	**CSIR**
供电电源 (标称)	**115-120 V/60 Hz 1~**
制冷剂	**R134a**
应用	**LBP+MBP+HBP**
电压范围	**103-135 V**
启动力矩	**HST**
认证	**UL**
启动器类型	**relay**
运行电容	**-/-**
启动电容	**240 µF**
堵转电流	**29.6 A**
额定运行电流	**4.3 A**
启动电流	**27.5 A**

环境/机舱温度


环境温度范围: 10 - 43°C / 50 - 109°F

机舱温度范围 压缩机: 10 - 48°C / 50 - 118°F

系统冷却条件

风冷 3m/s

电路图

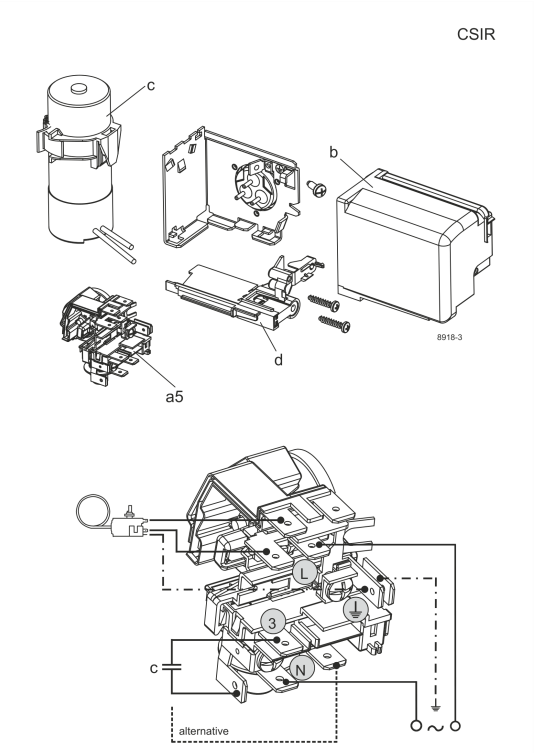

View full size

组件（已预装）

a5 电流继电器（T1246/L6） 117U7080

c 启动电容（240µF） 117U5002


b, d 线盖 + 管夹 + 螺丝（5VA-compl.） 103N0600


可选组件

b, d 100x 线盖 + 管夹 + 螺丝（5VA） 103N2060

b, d 线盖 + 管夹 + 螺丝（5VA）袋装 103N1060

运行范围

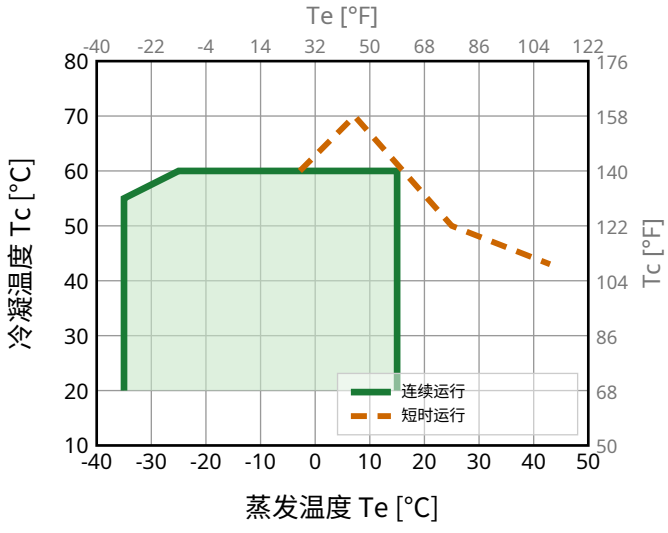

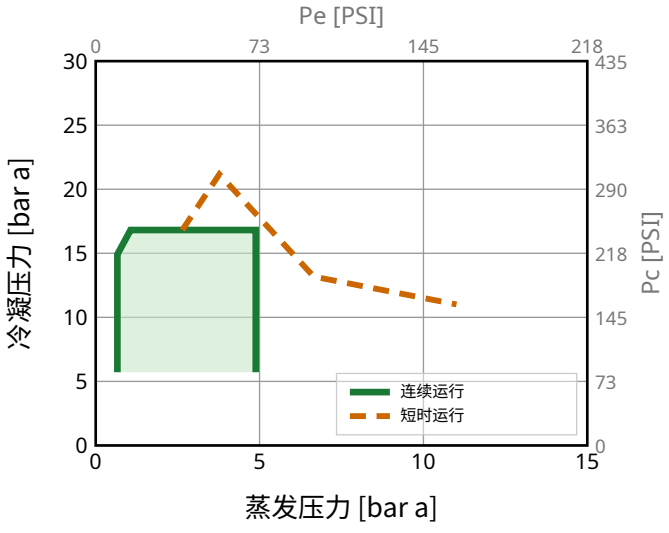

型号 采购代码:

KLF6.6GFHX 配置 1 **106G6712**

标准工况下性能参数

R134a, 120 V/60 Hz, CSIR, 风冷 3m/s

pe	pc	RGT	Tliq	制冷量			COP	EER	P	I	ṁ	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	**243**	828	209	**1.44**	4.91	169	2.39	4.71	**ASHRAE LBP**
-6.7 20	54.4 129.9	35 95	46.1 115	**498**	1700	428	**2.00**	6.81	250	2.90	10.85	**ASHRAE MBP**
7.2 45	54.4 129.9	35 95	46.1 115	**867**	2958	746	**2.72**	9.29	318	3.33	19.19	**ASHRAE HBP**
-35 -31	40 104	20 68	40 104	**119**	405	102	**1.03**	3.52	115	2.02	2.60	**EN12900 LBP**
-10 14	45 113	20 68	45 113	**430**	1467	370	**2.02**	6.89	213	2.67	10.03	**EN12900 MBP**
5 41	50 122	20 68	50 122	**737**	2513	633	**2.53**	8.63	291	3.16	18.48	**EN12900 HBP**

性能参数表


R134a, 120 V/60 Hz, CSIR, 风冷 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	ṁ
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	**108**	367	93	**0.91**	3.10	118	2.05	2.32
-30	-22	**156**	532	134	**1.16**	3.97	134	2.16	3.36
-20	-4	**278**	947	239	**1.62**	5.53	171	2.41	6.02
-10	14	**445**	1520	383	**2.09**	7.14	213	2.67	9.73
0	32	**674**	2299	579	**2.66**	9.08	253	2.92	14.87
10	50	**977**	3335	841	**3.40**	11.60	287	3.14	21.88
15	59	**1162**	3964	999	**3.87**	13.20	300	3.23	26.25

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	**77**	262	66	**0.61**	2.08	126	2.10	1.82
-30	-22	**124**	422	106	**0.87**	2.97	142	2.22	2.94
-20	-4	**238**	810	204	**1.29**	4.39	184	2.49	5.68
-10	14	**390**	1330	335	**1.67**	5.68	234	2.80	9.39
0	32	**595**	2029	511	**2.08**	7.11	285	3.12	14.50
10	50	**867**	2959	746	**2.60**	8.87	334	3.44	21.48
15	59	**1033**	3525	889	**2.91**	9.94	354	3.58	25.86




KL Compressors


SECOP

Keep electrical equipment clear from oil, chemicals, and water


When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.


RSIR

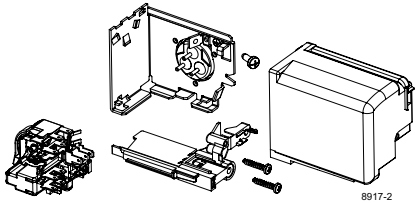

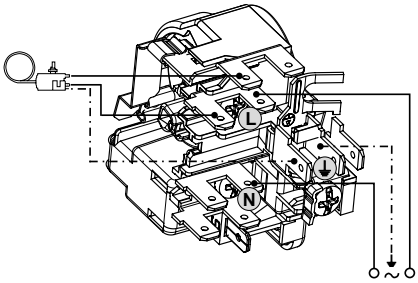



RSCR

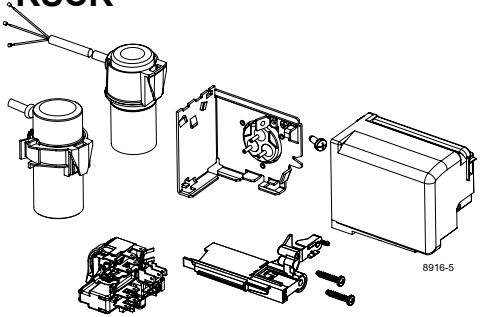


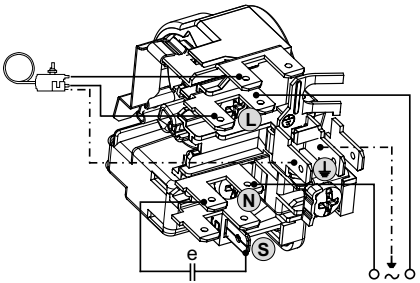

CSIR

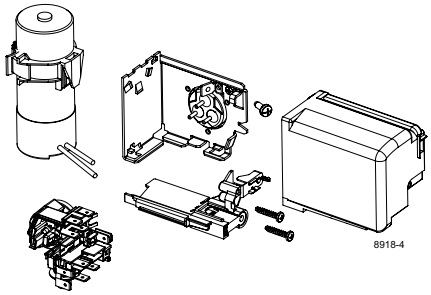

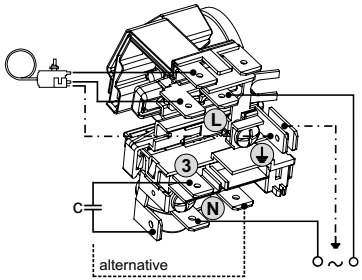



KL Compressors

SECOP


Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf

(applies to all flammable refrigerants)



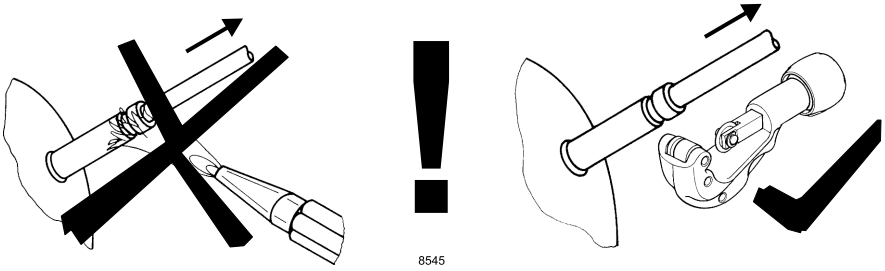

Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.secop.com**