Single
Packs

Single Pack KLF4.0CNH 115-127V 60Hz CSIR

Single pack code number: **195B4810**

Position	Title	Code	Amount
1	Compressor KLF4.0CNH	106H3401	1
2	Starting relay (QLZ-7.85A, overload protector T1209/L6)	117U7074	1
3	Starting capacitor (240µF 125V, 6.3mm)	117U5002	1
4	Screw for cable clamp	10636000	1
5	Screw for cable clamp	10636200	1
6	Cable clamp	16058100	1
7	Cover	10636401	1
8	Earth screw	10641201	1
9	Sleeve	112-2085	4
10	Rubber grommet 19mm	118-3666	4

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • **www.secop.com**

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

Model
KLF4.0CNH

Sales code:
106H3401

Compressor Data

Refrigerant(s)	**R290**
Refr. charge - tech. limit	**200g / 7.05oz**
Weight	**8.30 kg / 18.30lbs**
Displacement	**4.00 cm3 / 0.24cu.in**
Compressors on pallet	**100**

General – Configurations With KLF4.0CNH

–	**Conf. 1**	**Conf. 2**
Motor configuration	CSIR	RSCR
Power supply (nominal)	115-127 V/60 Hz	115-127 V/60 Hz
Number of phases	1	1
Voltage range	95-140 V	95-140 V
Approvals	UL, CCC	UL, CCC
Starting torque	HST	LST
Refrigerant	R290	R290
Application	LBP+MBP	LBP+MBP
Hot gas defrost	OK	OK
Long interval pull down	OK	OK

Application Notes

- Provision for PE Grounding is located at the PE Stamp on the compressor

Model
KLF4.0CNH

Sales code:
106H3401

Compressor Design

Oil type	**POE**	Winding resistance main	**3.4 Ohm**
Oil viscosity	**9,7cSt**	Winding resistance aux	**8 Ohm**
Oil quantity	**165 / 5.58fl.oz**	Max. winding temp.	**125 °C**
Free gas volume comp.	**1,630 cm3 / 55.12fl.oz**	Max. discharge temp.	**130°C / 266°F**
Motor protection	**external**		

Compressor Dimensions

Housing

A Height	**182mm / 7.17in**
B Height	**175mm / 6.89in**
C Length shell	**198mm / 7.80in**
D Length w. cover	**238mm / 9.37in**
E Width	**160mm / 6.30in**

Find 3D Model here



Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 8.11–8.29 / 0.32–0.33in	øi 6.41–6.59 / 0.25–0.26in	øi 6.41–6.59 / 0.25–0.26in
Material	CU	CU	CU
Horizontal angle ±2°	35°	13°	0°
Vertical angle ±2°	30°	40°	145°
Position l/h/w [mm]	119/73/59 / 4.69/2.87/2.32in	117/107/66 / 4.61/4.21/2.60in	-88/101/71 / -3.46/3.98/2.80in
Straight tube l. [mm]	13.5 / 0.53in	13.5 / 0.53in	13.5 / 0.53in

Mounting Accessories

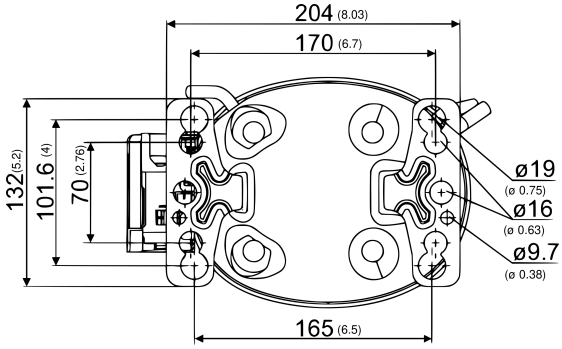

Dimensions in mm [in]

Bolt joint



Snap-on



	one comp.	multi pack
Bolt joint | M6 | ø16mm	118-1917	118-1918
Bolt joint | ø1/4" | ø16mm	118-1946	–
Bolt joint | ø1/4" | ø19mm	118-1949	–
Snap-on | ø7,3 | ø16mm	118-1947	118-1919

Model
KLF4.0CNH Configuration 1

Sales code:
106H3401

Configuration

Motor configuration	**CSIR**
Power supply (nominal)	**115-127 V/60 Hz 1~**
Refrigerant	**R290**
Application	**LBP+MBP**
Voltage range	**95-140 V**
Starting torque	**HST**
Approvals	**UL, CCC**
Starting device type	**relay**
Run capacitor	**-/-**
Start capacitor	**240 µF**
LRA (locked rotor amps / 4s/ U(N))	**21.2 A**
RLA (rated load amps / 1s/ U(N))	**2.7 A**
Cut in current (U(N))	**20.5 A**

Ambient/ machine room temperatures minimum /maximum
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling
fan 3m/s

Electrical Accessories / Wiring Diagram

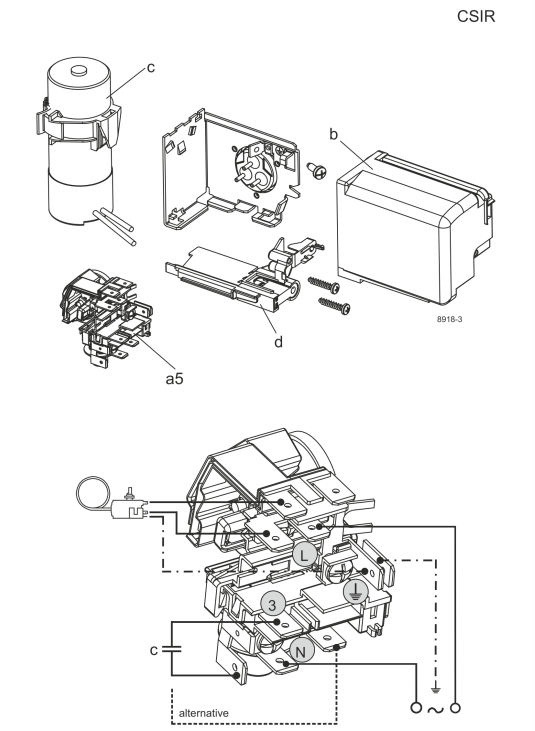

View full size

Components
a5 current relay (T1209/L6-S4) 117U7074
c start capacitor (240µF) 117U5002
b, d cover + clamp + screws (5VA-compl.) 103N0600

Alternative components
b, d 100x cover + clamp + screws (5VA) 103N2060
b, d cover + clamp + screws (5VA) in bag 103N1060

Operation Pressure Range

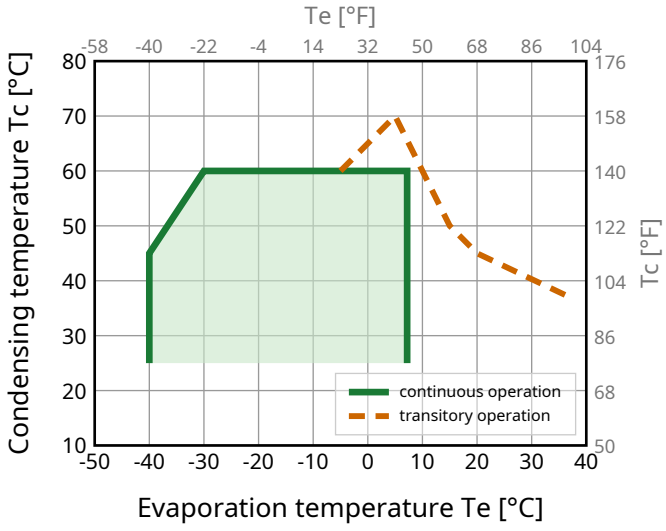

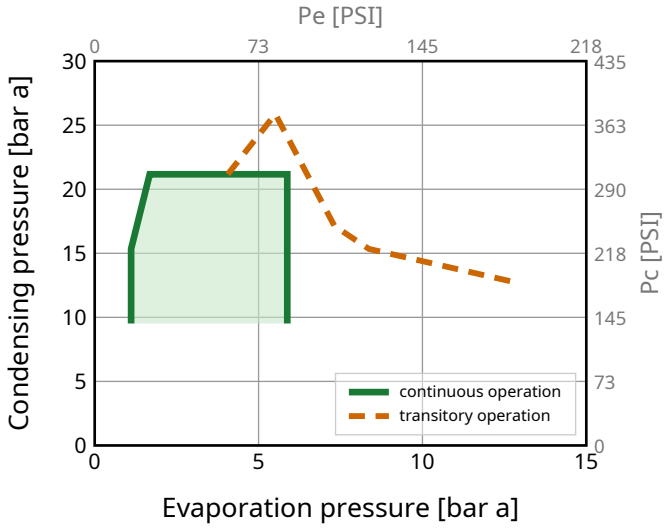

Model
KLF4.0CNH Configuration 1

Sales code:
106H3401

Standard Conditions

R290, 115 V/60 Hz, CSIR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	ṁ	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	**229**	782	197	**1.50**	5.10	153	1.92	2.33	**ASHRAE LBP**
-25 -13	55 131	32 89.6	55 131	**169**	578	146	**1.14**	3.89	149	1.89	2.12	**CECOMAF LBP**
-35 -31	40 104	20 68	40 104	**127**	434	109	**1.05**	3.58	121	1.73	1.46	**EN12900 LBP**
-6.7 20	54.4 129.9	35 95	46.1 115	**418**	1428	360	**2.09**	7.13	200	2.25	4.79	**ASHRAE MBP**
-10 14	55 131	32 89.6	55 131	**332**	1132	285	**1.72**	5.87	193	2.19	4.22	**CECOMAF MBP**
-10 14	45 113	20 68	45 113	**377**	1285	324	**2.14**	7.31	176	2.07	4.63	**EN12900 MBP**

Performance Tables

R290, 115 V/60 Hz, CSIR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	ṁ
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-40	-40	**82**	279	70	**0.71**	2.42	115	1.71	0.92
-30	-22	**159**	544	137	**1.21**	4.12	132	1.79	1.80
-20	-4	**259**	885	223	**1.69**	5.75	154	1.93	2.95
-10	14	**392**	1336	337	**2.23**	7.59	176	2.07	4.50
0	32	**566**	1932	487	**2.93**	10.01	193	2.20	6.58
7.2	45	**724**	2469	622	**3.63**	12.39	199	2.24	8.51

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-40	-40	**53**	181	46	**0.48**	1.64	110	1.67	0.66
-30	-22	**127**	434	109	**0.95**	3.23	134	1.80	1.59
-20	-4	**217**	740	186	**1.32**	4.52	164	1.99	2.73
-10	14	**332**	1132	285	**1.72**	5.87	193	2.19	4.22
0	32	**482**	1645	415	**2.23**	7.60	217	2.37	6.22
7.2	45	**618**	2108	531	**2.71**	9.26	228	2.46	8.07

Model
KLF4.0CNH Configuration 2

Sales code:
106H3401

Configuration

Motor configuration	**RSCR**
Power supply (nominal)	**115-127 V/60 Hz 1~**
Refrigerant	**R290**
Application	**LBP+MBP**
Voltage range	**95-140 V**
Starting torque	**LST**
Approvals	**UL, CCC**
Starting device type	**PTC**
Run capacitor	**15 µF**
Start capacitor	**-/-**
LRA (locked rotor amps / 4s/ U(N))	**21.2 A**
RLA (rated load amps / 1s/ U(N))	**2.7 A**
Cut in current (U(N))	**20.5 A**

Ambient/ machine room temperatures minimum /maximum
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling
fan 3m/s

Electrical Accessories / Wiring Diagram

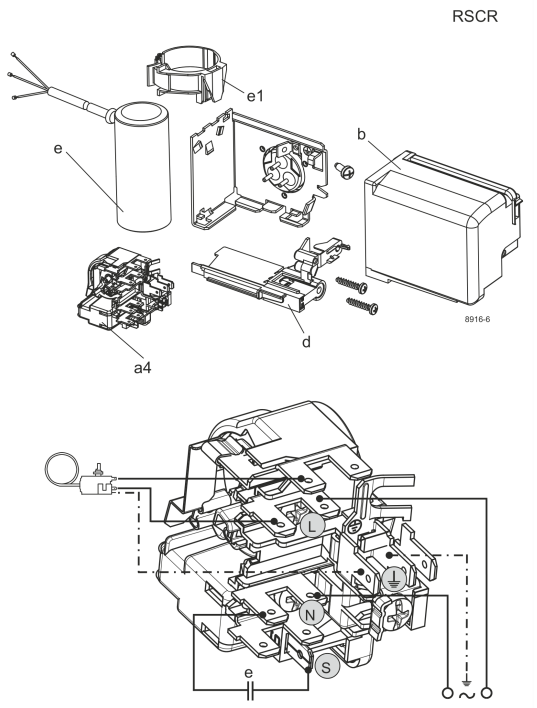

Components
a4 DLS4 (PTC,6.3mm, T1209/L6 - S4) 103N0210
e run capacitor (15µF, 6,3mm) 117-7153
b, d cover + clamp + screws (5VA-compl.) 103N0600
e1 retaining clamp 103N0535

Alternative components
b, d 100x cover + clamp + screws (5VA) 103N2060
b, d cover + clamp + screws (5VA) in bag 103N1060

Operation Pressure Range

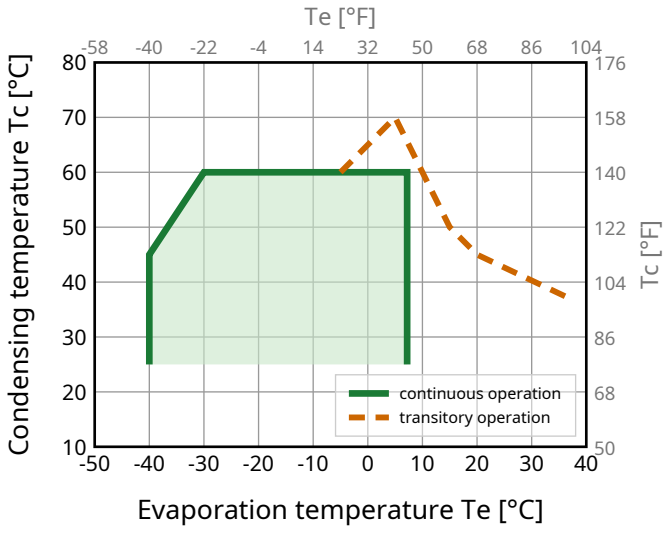

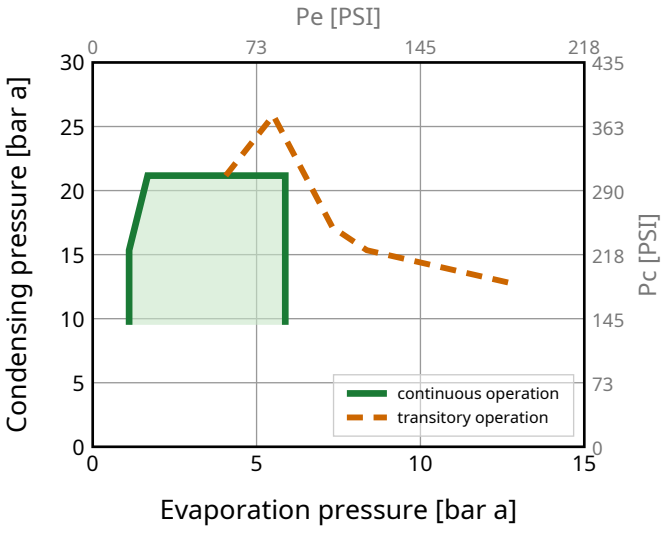

Model
KLF4.0CNH Configuration 2

Sales code:
106H3401

Standard Conditions

R290, 115 V/60 Hz, RSCR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	ṁ	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	**232**	791	199	**1.57**	5.37	147	1.36	2.35	**ASHRAE LBP**
-25 -13	55 131	32 89.6	55 131	**171**	584	147	**1.20**	4.09	143	1.32	2.15	**CECOMAF LBP**
-35 -31	40 104	20 68	40 104	**128**	437	110	**1.10**	3.76	116	1.10	1.47	**EN12900 LBP**
-6.7 20	54.4 129.9	35 95	46.1 115	**424**	1446	364	**2.22**	7.58	191	1.73	4.85	**ASHRAE MBP**
-10 14	55 131	32 89.6	55 131	**336**	1146	289	**1.83**	6.23	184	1.67	4.27	**CECOMAF MBP**
-10 14	45 113	20 68	45 113	**380**	1298	327	**2.26**	7.72	168	1.53	4.68	**EN12900 MBP**

Performance Tables

R290, 115 V/60 Hz, RSCR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	ṁ
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-40	-40	**83**	282	71	**0.75**	2.56	110	1.05	0.93
-30	-22	**160**	548	138	**1.27**	4.33	126	1.18	1.81
-20	-4	**262**	893	225	**1.78**	6.06	147	1.36	2.98
-10	14	**396**	1349	340	**2.35**	8.03	168	1.53	4.54
0	32	**572**	1951	492	**3.10**	10.59	184	1.67	6.65
7.2	45	**730**	2492	628	**3.84**	13.11	190	1.72	8.59

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-40	-40	**53**	182	46	**0.51**	1.73	106	1.01	0.66
-30	-22	**128**	437	110	**0.99**	3.39	129	1.21	1.60
-20	-4	**219**	748	189	**1.40**	4.77	157	1.44	2.76
-10	14	**336**	1146	289	**1.83**	6.23	184	1.67	4.27
0	32	**488**	1664	420	**2.37**	8.10	206	1.86	6.29
7.2	45	**624**	2131	537	**2.90**	9.90	215	1.94	8.16



KL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

RSIR

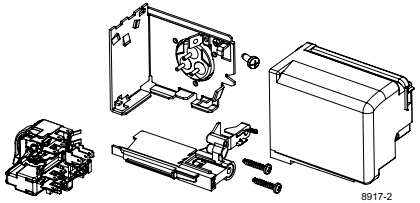

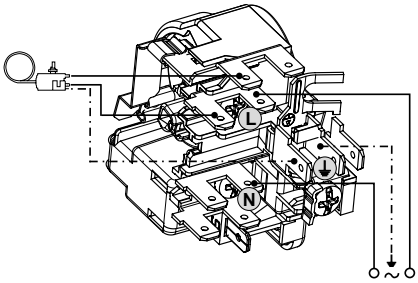

RSCR

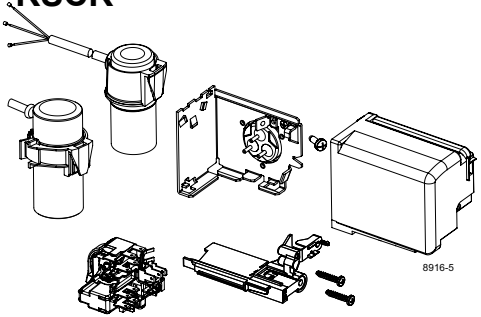

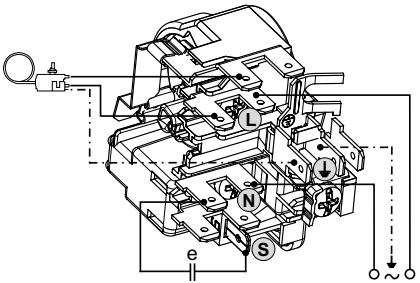

CSIR

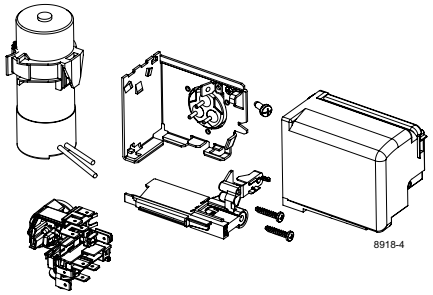

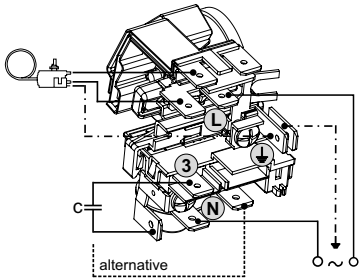



KL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf

(applies to all flammable refrigerants)

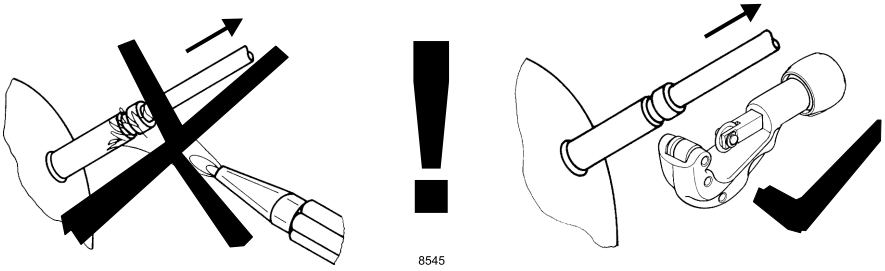

Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.secop.com**