

Single Pack NLVE13CN 115-127V 50/60Hz

Single pack code number: **195B4831**

Position	Title	Code	Amount
1	Compressor NLVE13CN	105H7374	1
2	Electronic unit NLVE	105N4101	1
3	Cover	103N2008	1
4	Bolt joint for one compressor M6 ø16mm	118-1917	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • www.secop.com

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

Model

Designation	NLVE13CN	Sales code:	105H7374
-------------	-----------------	-------------	-----------------

Compressor design

Oil type	Polyolester	Refrigerant(s)	R290
Oil viscosity	32cSt	Displacement	12,55cm³ / 0,77cu.in
Oil quantity	300cm³ / 10,1fl.oz	Compressors on pallet	80
Refr. charge - tech. limit	300g / 10,6oz		
Free gas volume comp.	2360cm³ / 79,8fl.oz		
Weight	10,8kg / 23,8lbs		
Motor protection	2# internal		
Winding resist. ph. to ph.	3,55Ω (at 25°C)		
Max. winding temp.	125°C / 257°F		
Max. discharge temp.	130°C / 266°F		



General - Configurations and Applications with NLVE13CN and Controller

Conf. 1

Sales code single pack:	105N4100
Sales code industry pack:	105N4101
Power supply (nominal)	115–127V,50/60Hz
Approvals	UL
Refrigerant	R290
Number of phases	1~AC
Application	L+MBP
Starting torque	HST
Hot gas defrost	OK
Long interval pull down	OK
System cooling	Fan cooling 3m/s
Note	- / -

Controller functions

Conf. 1

Protection	Mechanic
Max output power	1000W
No of relays	0
Hot gas defrost	yes
AEO speed setting	yes
Serial com, (Modbus)	-
DWI / Frequency input	yes
Note	


Model

Designation **NLVE13CN** Sales code: **105H7374**


Compressor dimensions

Housing	A Height	203mm / 7,99in
	B Height	197mm / 7,76in
	C Length shell	205mm / 8,07in
	D Length w. cover	252mm / 9,92in
	E Width	166mm / 6,54in

Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 8,11-8,29	øi 6,41-6,59	øi 6,41-6,59
(i:inside, o:outside) [in]	øi 0,32-0,33	øi 0,25-0,26	øi 0,25-0,26
Material	copper	copper	copper
Horizontal angle ±2°	0°	0°	0°
Vertical angle ±2°	15°	21°	155°
Position l/h/w [mm]	132/69/57	94/102/81	-109/94/72
[in]	5,2/2,7/2,2	3,7/4/3,2	-4,3/3,7/2,8
Straight tube l. [mm]	12	12	12
[in]	0,5	0,5	0,5

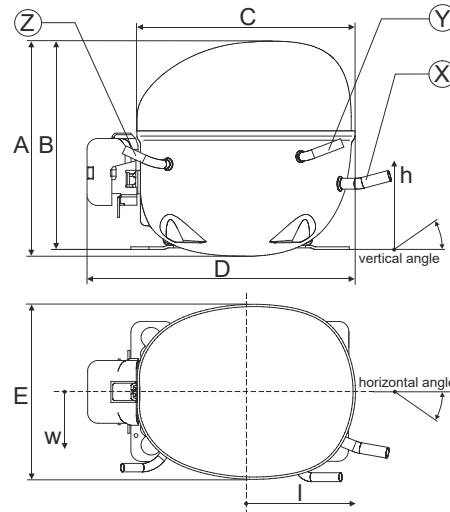

Compressor fixation


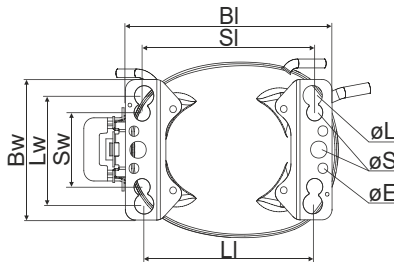


Baseplate	[mm]	[inch]
BI	204	8.03
Bw	132	5.2
øE	ø 9.7	ø 0.38

Large holes	[mm]	[inch]
LI	165	6.5
Lw	101.6	4
øL	ø 19	ø 0.75

Small holes	[mm]	[inch]
SI	170	6.7
Sw	70	2.76
øS	ø 16	ø 0.63

Bolt joint

Snap-on

Mounting accessories

Mounting accessories	one comp.	multi pack
Bolt joint M6 ø16mm	118-1917	118-1918
Bolt joint ø1/4" ø16mm	118-1946	
Bolt joint ø1/4" ø19mm	118-1949	
Snap-on ø7,3 ø16mm	118-1947	118-1919

Application notes

Provision for PE Grounding is located at the PE Stamp on the compressor

Semi suction intake without telescope

QR Code and Hyperlink leads to the


Operating Instructions.



Model			
Designation	NLVE13CN	115–127V,50/60Hz	Conf. 1
Sales code:			105H7374
Controller	NLV Core Function 115V	105N4100	

Sales code single pack:	105N4100 (1 units)
Sales code industry pack:	105N4101 (8 units)
Adaption to compressor:	detached
Protection class:	IP31
Weight:	1kg/2,2lbs
Voltage nom.:	115–127V,50/60Hz
Voltage range:	100–140V
Max. current:	8 A
LRA (Locked Rotor Amperage):	1,3A
Cable length:	680mm
Compressor speed range:	2000-4500rpm
Housing plastic:	UL94-5VA

Controller dimensions:

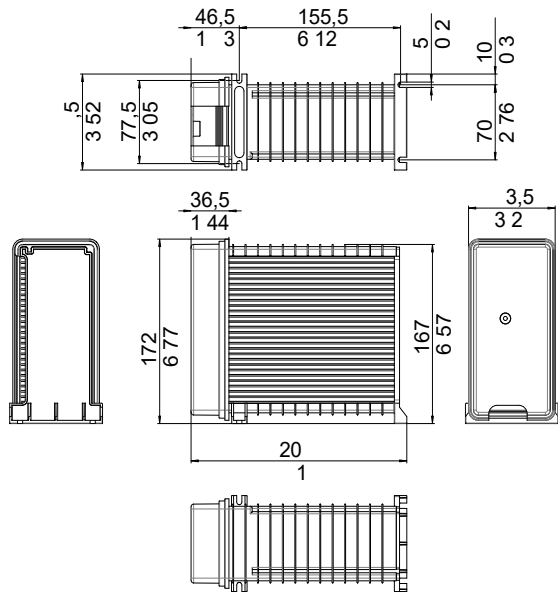

Operation Limits

System cooling

Ambient/ machineroom temperatures minimum /maximum


Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range compressor:	10 - 48°C / 50 - 119°F
Machine room temperature range controller:	10 - 50°C / 50 - 122°F

Compressor and Controller Cooling:

Fan cooling 3m/s


Ensure proper airflow of 3 m/s at both compressor and electronic units.

The airflow for the electronics must be directed to the heat sink.

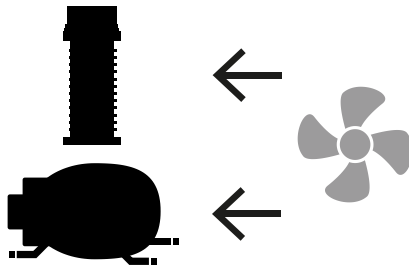


Operation pressure range

R290

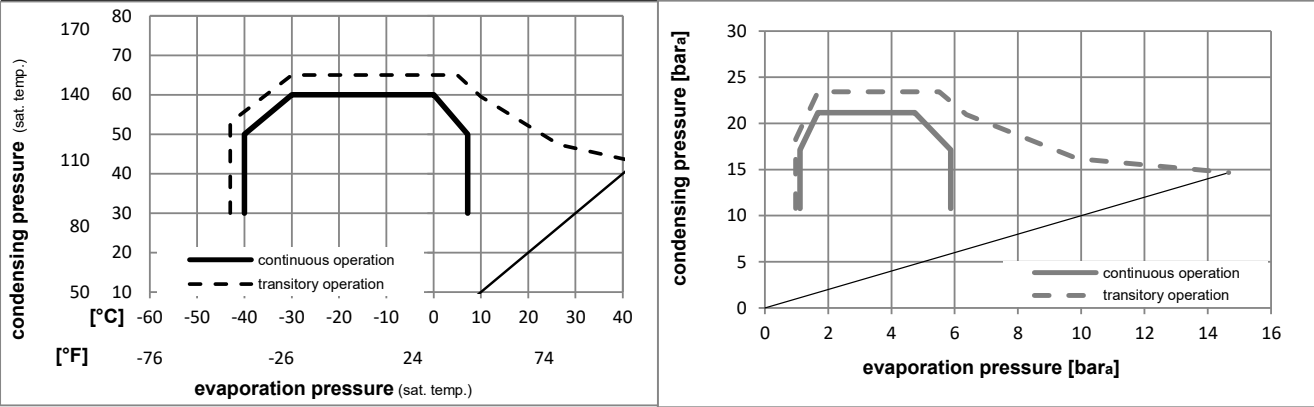

Model					
Designation	NLVE13CN	115–127V,50/60Hz	Conf. 1	Sales code:	105H7374
Controller	NLV Core Function 115V				105N4100
<u>Controller connections</u>					

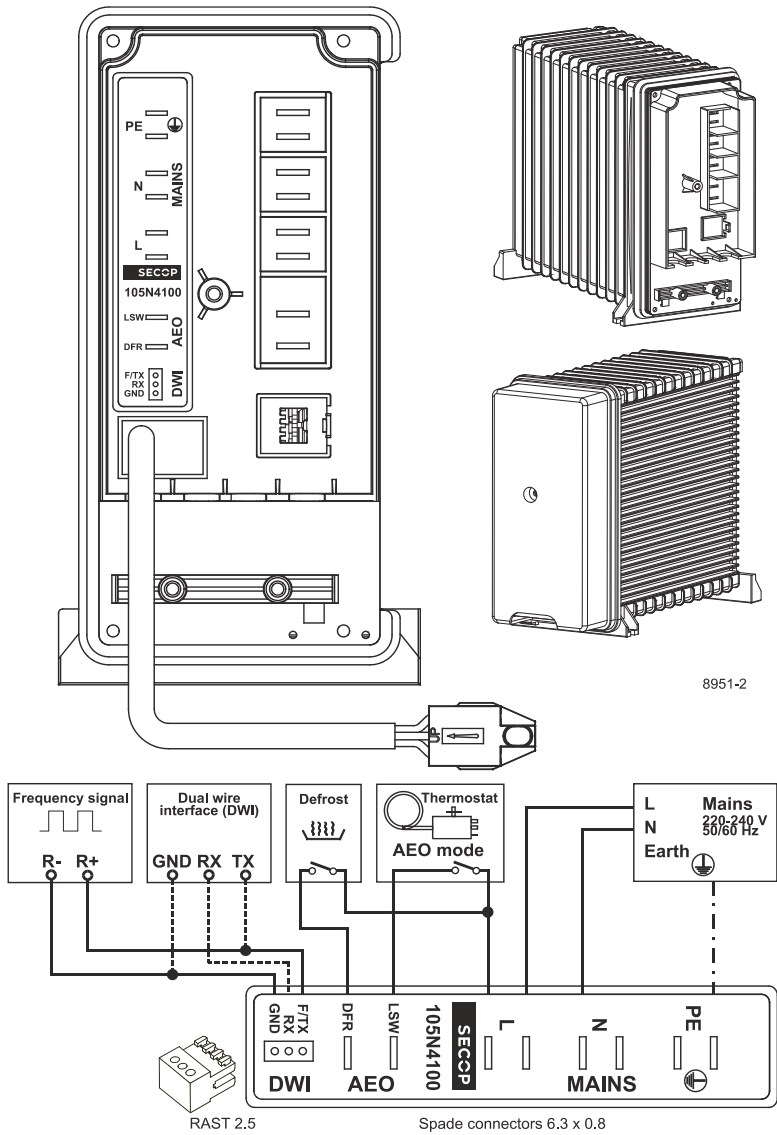

Accessories (Compressor + Controller) - check operation manual for details

103N2008	plastic cover	1 pcs
----------	---------------	-------

Model

Designation	NLVE13CN	115–127V,50/60Hz	Conf. 1	Sales code:	105H7374
Controller	NLV Core Function 115V				105N4100


Optimization + standard conditions

R290, 115V, 60Hz, Rpm_N 4500, Fan cooling 3m/s


	Evaporating pressure (saturation temperature)													Condensing pressure (saturation temperature)			Power consumption																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
														Return gas temp.			Current consumption																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
														Liquid temp.			Ref. mass flow																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
														Cooling capacity			COP			EER			P1			I			ṁ																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
														[W]			[Btu/h]			[kcal/h]			[W/W]			[Btu/Wh]			[kcal/Wh]			[W]			[A]			[kg/h]																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
[°C]	-23	54	32	32																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															

Standard conditions with different RPM

R290, 115V, 60Hz, Fan cooling 3m/s

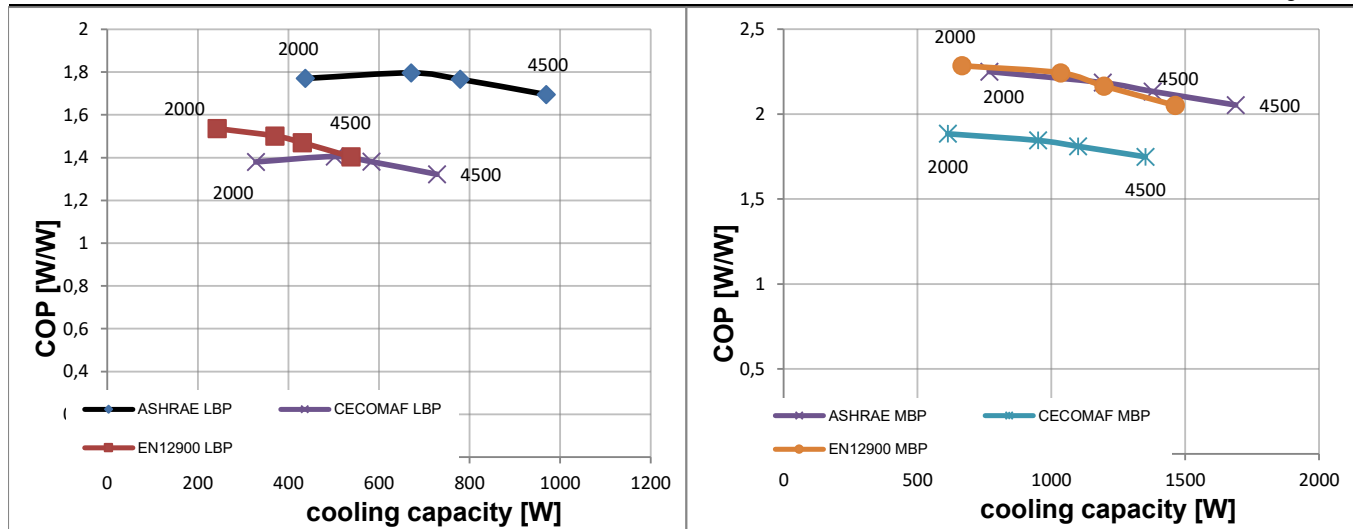

Test conditions:	pe [°C]	pc [°C]	Tliq [°C]	Tsuc [°C]	pe [°C]	pc [°C]	Tliq [°C]	Tsuc [°C]
ASHRAE LBP	-23	54,44	32,22	32,22	ASHRAE MBP	-6,66	54,44	46,11
CECOMAF LBP	-25	55	55	32	CECOMAF MBP	-10	55	55
EN12900 LBP	-35	40	40	20	EN12900 MBP	-10	45	45


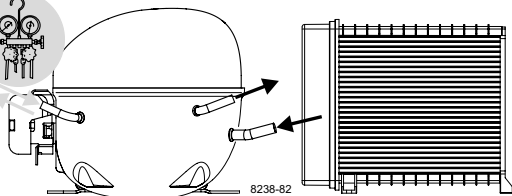



Instructions

NLVE Compressors
115-127 V, 50/60 Hz
105N4100 Controllers

SECCP

Keep electrical equipment
clear from oil, chemicals,
and water

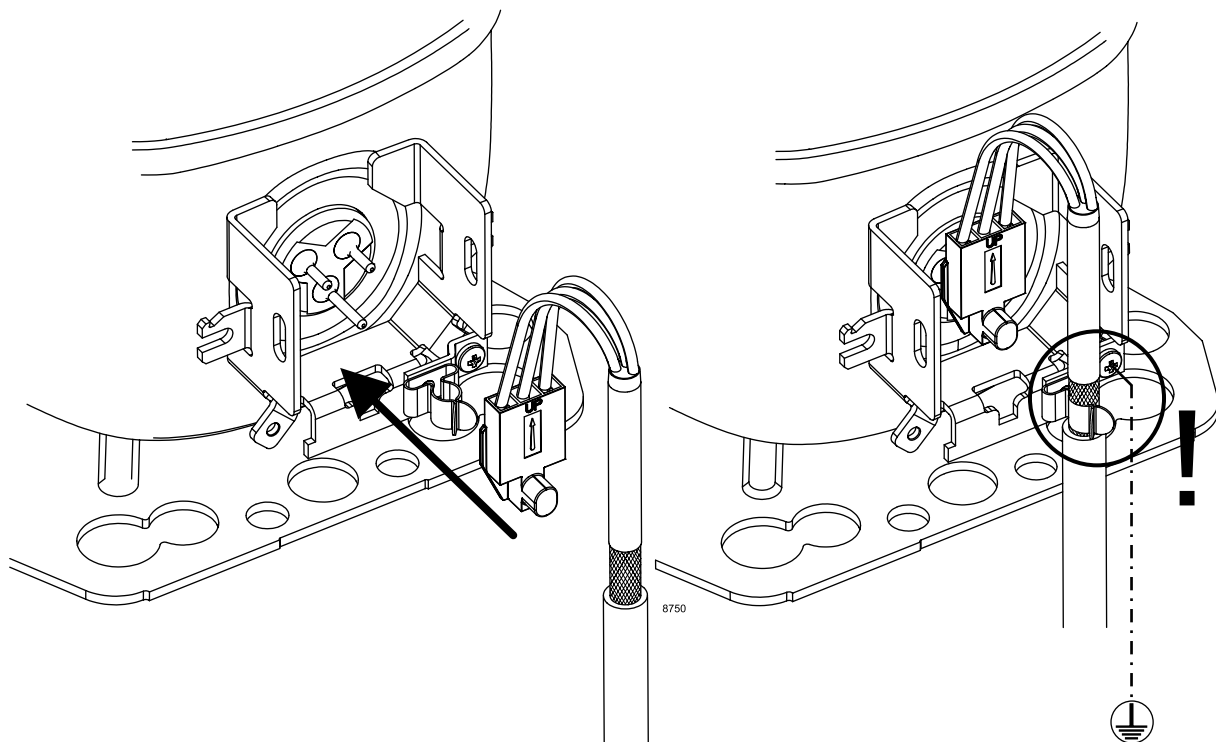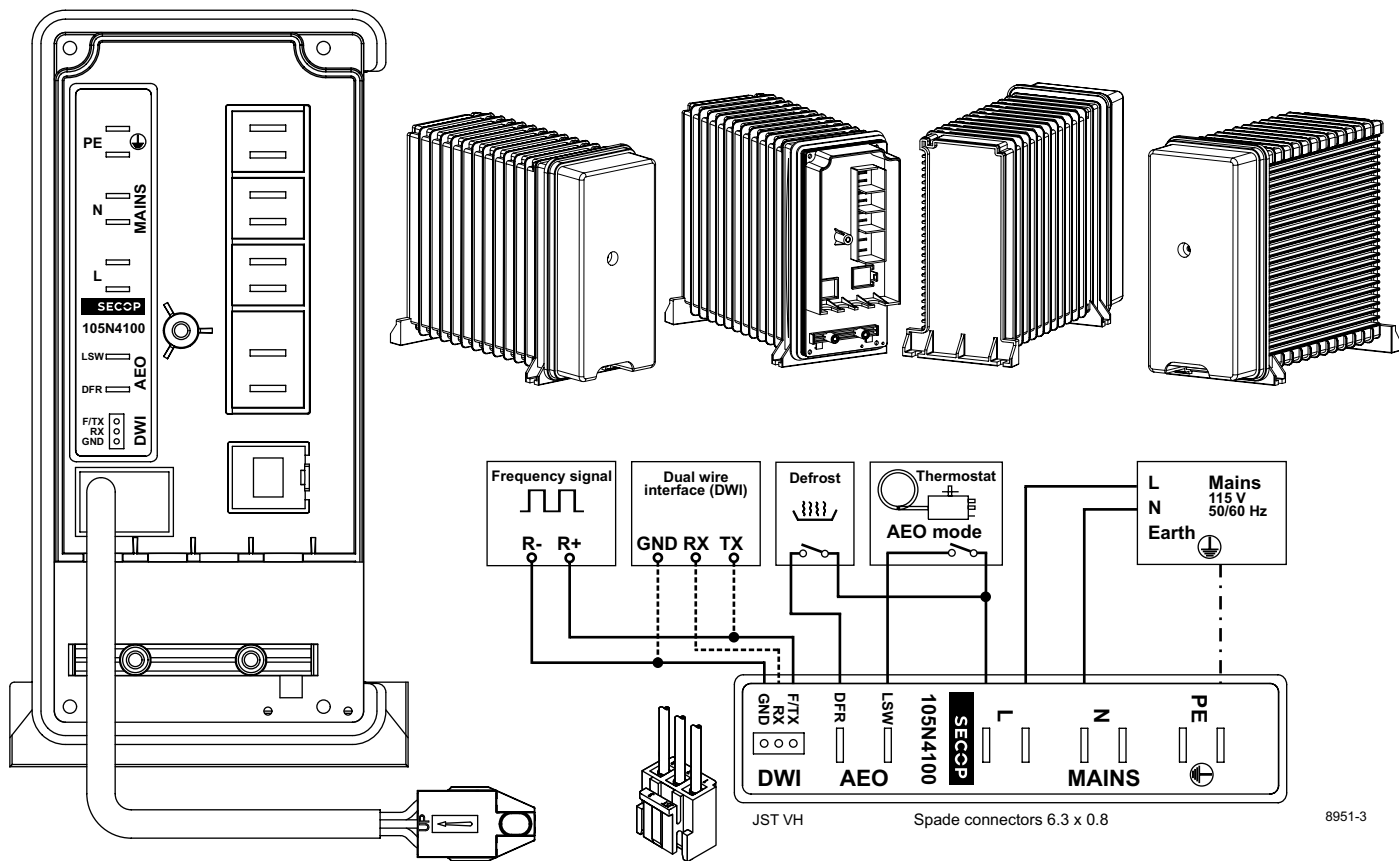

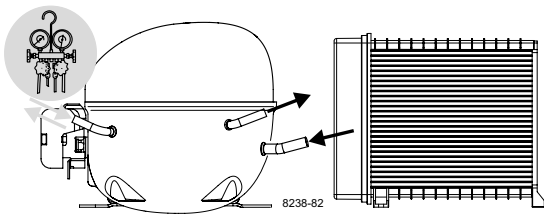

Instructions

NLVE Compressors
115-127 V, 50/60 Hz
105N4100 Controllers


SECCP

Keep electrical equipment
clear from oil, chemicals,
and water




Service/Repair – R170, R290, R1270


(applies to all flammable refrigerants)



8545



Ensure Proper Airflow of 3 m/s at Both Compressor and Electronic Unit (Heatsink)

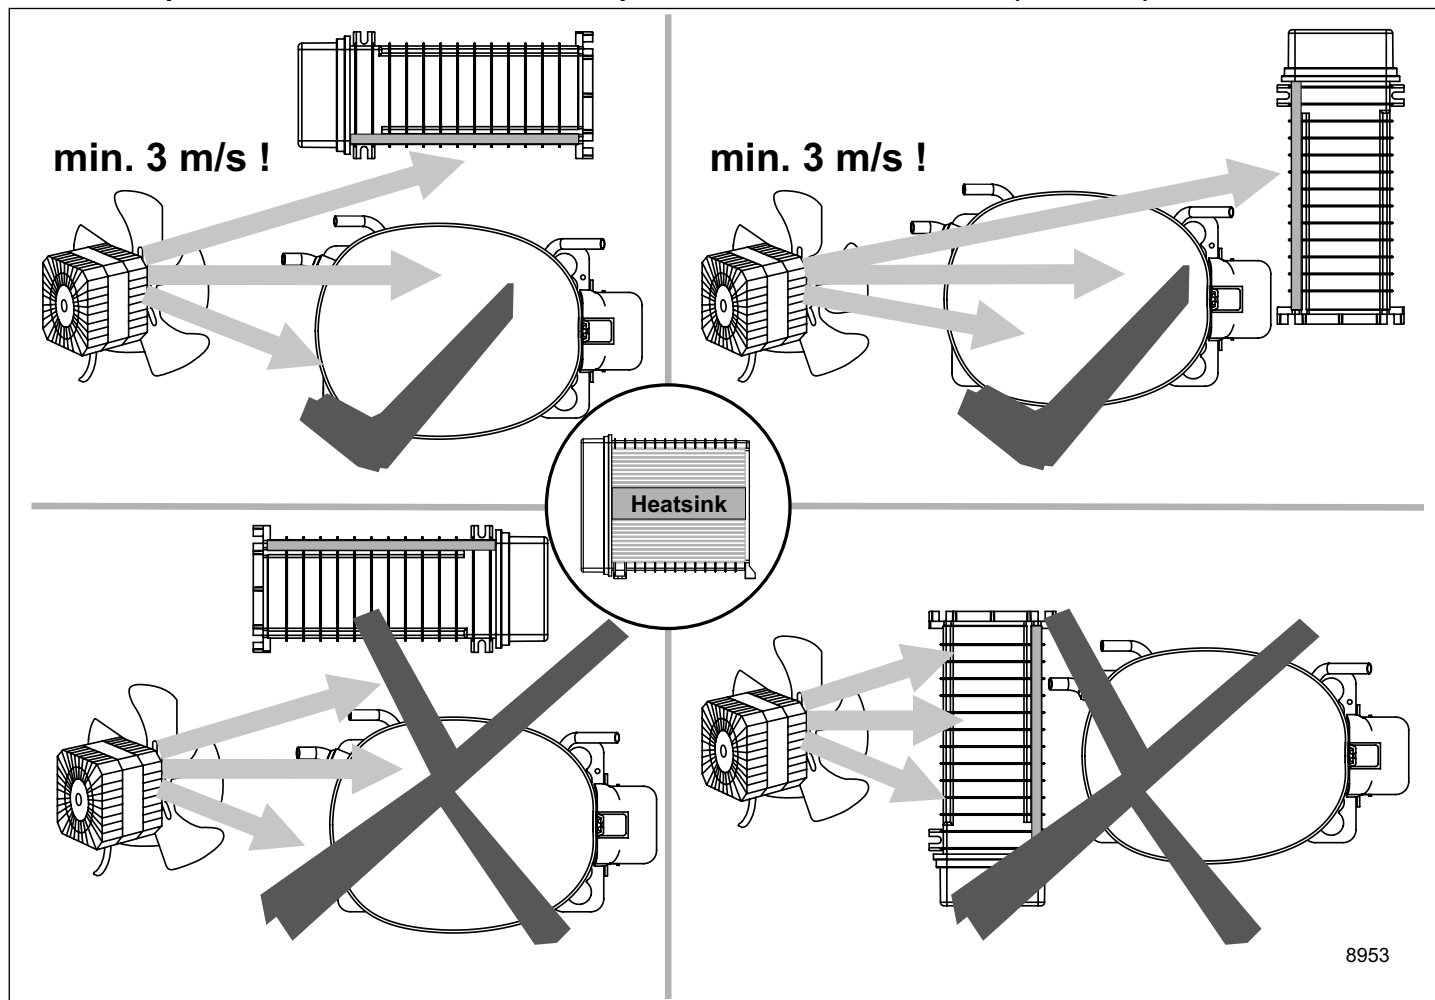

Airflow	3 m/s
Operating conditions	+ 5 °C to 43 °C - humidity < 90 % rH non condensing
Storage conditions	-25 °C to 70 °C - humidity < 90 % rH non condensing
Supply voltage	115-127 V (± 10 %)
Frequency	50/60 Hz
Input power, max.	1000 W

Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.seccp.com**