Single
Packs

Single Pack NLE14LNDX 220-240V 50Hz CSCR

Single pack code number: **195B4835**

Position	Title	Code	Amount
1	Compressor NLE14LNDX	105H7402	1
2	Start equipment NLE	117U8201	1
3	Starting capacitor (80µF 260V)	117U5353	1
4	Run Capacitor (10µF 450V, 6.3mm)	117-7166	1
5	Run capacitor bracket	117-0314	1
6	Cover NLE	117U1038	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • **www.secop.com**

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

Model

Designation **NLE14LNDX** **220-240V/50Hz 1~** Sales code: **105H7402**

Compressor dimensions

Housing

A Height	209mm / 8,23in
B Height	203mm / 7,99in
C Length shell	205mm / 8,07in
D Length w. cover	262mm / 10,31in
E Width	166mm / 6,54in

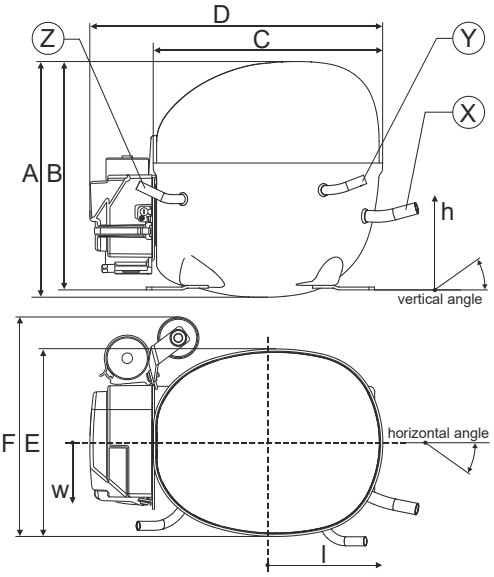

Connectors		Suction X	Discharge Y	Process Z
Diameter	[mm]	øi 8,11-8,29	øi 6,11-6,29	øi 6,11-6,29
(i:inside, o:outside)	[in]	øi 0,32-0,33	øi 0,24-0,25	øi 0,24-0,25
Material		copper	copper	copper
Horizontal angle	±2°	11°	0°	0°
Vertical angle	±2°	15°	21°	25°
Position l/h/w	[mm]	140/72/59	94/98/87	-109/93/74
	[in]	5,5/2,8/2,3	3,7/3,9/3,4	-4,3/3,7/2,9
Straight tube l.	[mm]	12	12	12
	[in]	0,5	0,5	0,5

Compressor fixation

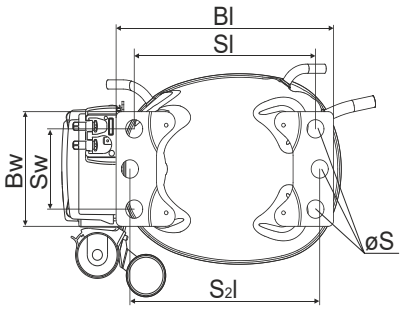

Baseplate	[mm]	[inch]
Bl	204	8.03
Bw	100	3.94

Small holes	[mm]	[inch]
Sl	170	6.7
Sw	70	2.76
S2l	178	7
øS	ø 16	ø 0.63

Bolt joint



Snap-on



Mounting accessories	one comp.	multi pack
Bolt joint | M6 | ø16mm	118-1917	118-1918
Bolt joint | ø1/4" | ø16mm	118-1946	
Snap-on | ø7,3 | ø16mm	118-1947	118-1919

Application notes

Provision for PE Grounding is located at the PE Stamp on the compressor

Technical Data Compressor

SECOP

Model

Designation					
	NLE14LNDX	**220-240V/50Hz**	**Conf. 1**	Sales code:	**105H7402**

Configuration

Motor configuration	CSCR
Power supply (nominal)	220-240V/50Hz 1~
Refrigerant	R290
Application	LBP
Voltage range	198-254V
Starting torque	HST
Approvals	VDE

Electrical accessories / wiring diagram

CSCR

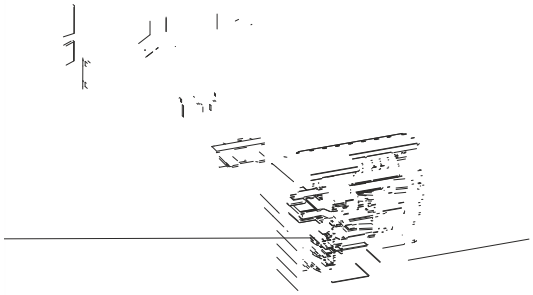

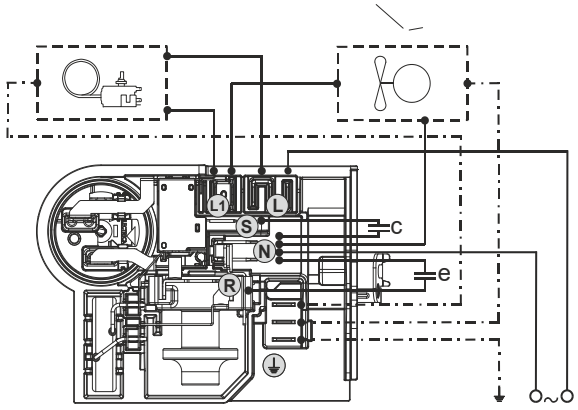

Ambient/ machine room temperatures minimum /maximum

Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	fan 3m/s

Operation pressure range

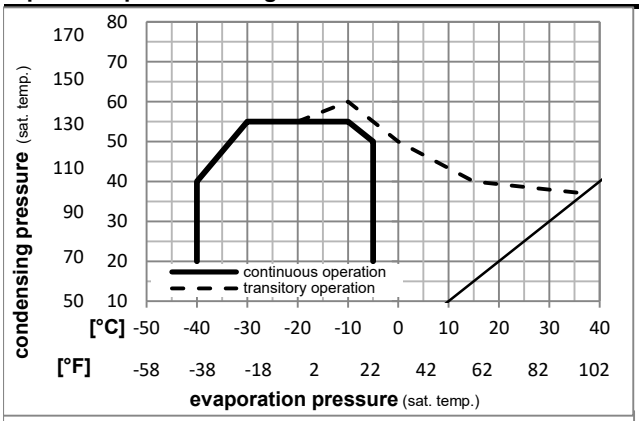

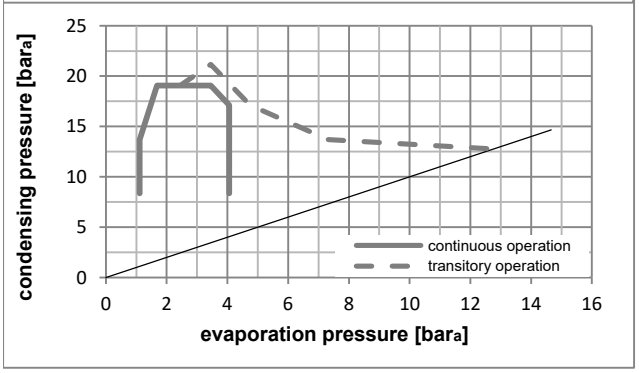

Components

a6	NL starter kit	117U8201
c	start capacitor (80µF)	117U5353
e	run cap (10µF, 6.3mm,c.length 280mm)	117-7166
b	cover terminal board + clamp	117U1038
e1	retaining clamp	117-0314
	screw M4x8mm	117-0301
d	cord relief	103N1007