

MB3CKV Direct Current Compressor R600a, Medical 12/24V DC



General

Code number (without electronic unit)	109M0860
Electronic unit - Solar 1	101N2742, 40 pcs: 101N2743
Compressors on pallet	240

Approvals

UL / CB



Application

Application range	LBP/MBP
Voltage range	VDC 9.6 - 17 / 19 - 34

Cooling requirements

Application	LBP	MBP
32°C / 38°C / 43°C	S	S

Absolute maximum ratings

Machine compartment temperature for compressor operation	°C	-10 to 50
Max. compressor tilt angle for temporary operation		±30°
Operating pressure range		see diagram to the right
Any levels of stress exceeding the absolute maximum value of machine compartment temperature range or operating pressure range or tilt angle may damage the device. Prolonged exposure to stress above the recommended operating conditions may also affect the device's reliability.		

Motor

Motor type	permanet magnet, brushless DC
Speed	rpm variable speed
Resistance, each of the three windings (25°C)	Ω 3.1

Design

Displacement	cm³	2.60
Oil quantity (type)	cm³	53 (polyolester)
Maximum refrigerant charge	g	70
Free gas volume in compressor	cm³	472
Weight - Compressor/Electronic unit	kg	1.37 / 0.14

Standard battery protection settings

Voltage (0.1 steps)		Default	Min. value	Max. value
12V ± 0.3V DC, all values	Cut out level	VDC 10.4	9.6	17
24V ± 0.3V DC, all values	Cut out level	VDC 22.8	19	32
Battery cut-in difference	VDC	1.3	0.5	10

Dimensions

Height	mm	A	89.0
		B	82.4
		B1	48.7
		B2	45.8
Suction connector	location/I.D. mm angle	C	6.2 5°
	material comment		Copper Rubber plug
Process connector	location/I.D. mm angle	D	6.2 77.9°
	material comment		Copper Rubber plug
Discharge connector	location/I.D. mm angle	E	5.0 86.9°
	material comment		Cu-plated steel Rubber plug
Connector tolerance	I.D. mm		±0.09, on 5.0 +0.12/+0.20
Remarks: Please follow the brazing instructions on page 3 (Product Bulletin DES.N.101.M).			





Approvals and warning label

S = Static cooling normally sufficient

Note: In case fan cooling is used:

condenser => fan => electronic => compressor

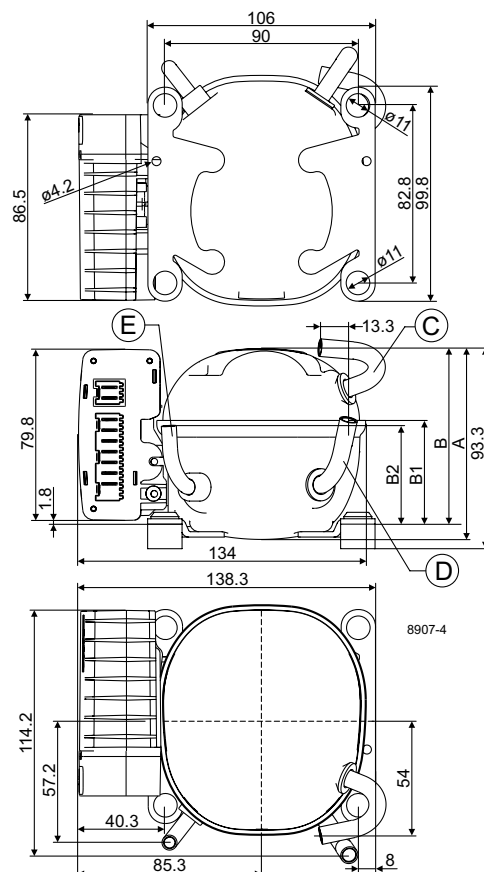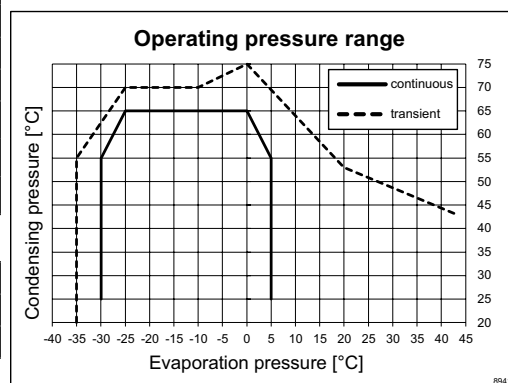

Operational errors (TOOL4COOL® or LED flashes)	
Error code or LED flashes	Error type
	Can be read out in the software TOOL4COOL®
7	Communication error (Communication of master controller stopped for 15 minutes (default))
6	Thermostat failure (If a NTC thermistor is short-circuit or has no connection, the electronic unit will enter manual mode).
5	Thermal cut-out of electronic unit (PCB or machine compartment temperature exceeds minimum or maximum limits).
4	Minimum motor speed error (If the refrigeration system is too heavily loaded, the motor cannot maintain min. speed at approximately 2,150 rpm).
3	Motor start error (The rotor is blocked or the differential pressure in the refrigeration system is too high (>5 bar)).
2	Fan over-current cut-out (The fan is overloading the electronic unit).
1	Battery protection cut-out (The voltage is outside the cut-out setting).

Wire Dimensions DC					
Size		Max. length* 12V operation		Max. length* 24V operation	
Cross section	AWG				
[mm ²]	[Gauge]	[m]	[ft.]	[m]	[ft.]
2.5	12	2.5	8	5	16
4	12	4	13	8	26
6	10	6	20	12	39
10	8	10	33	20	66

*Length between battery and electronic unit

Accessories for MB3CKV	
Mounting	Code number
Bolt joint for one compressor	118-1960
Snap-on for one compressor	118-1959
SDD Power Management Module	101N3110
SDD Connector Package	105N9030
Secop Gateway	105N9518


Test conditions	EN 12900 CECOMAF	ASHRAE LBP
Condensing temperature	55°C	54.4°C
Ambient temperature	32°C	32°C
Suction gas temperature	32°C	32°C
Liquid temperature	no subcooling	32°C

Spade connectors
6.3 mm | 1/4 in.

The diagram shows the rear of the SECCP 101N2742 control unit. It features a terminal block with two rows of spade connectors. The top row has 5 terminals, and the bottom row has 10 terminals. Wires are connected to these terminals: a 3-wire cable to the top 3 terminals, a 4-wire cable to the bottom 4 terminals, and a 2-wire cable to the bottom 2 terminals. A separate 2-wire cable is also shown connected to the top 2 terminals. To the right of the terminal block is a circular fan outlet. Below the terminal block is a circular fan inlet. A label on the right side of the unit provides technical specifications and safety information.

SECCP 101N2742	
IN	—
12/24V DC	+
FAN OUT	F +
FAN IN	F —
CE	+
UL	LIN
10	C
UL	T
UL	C

8958

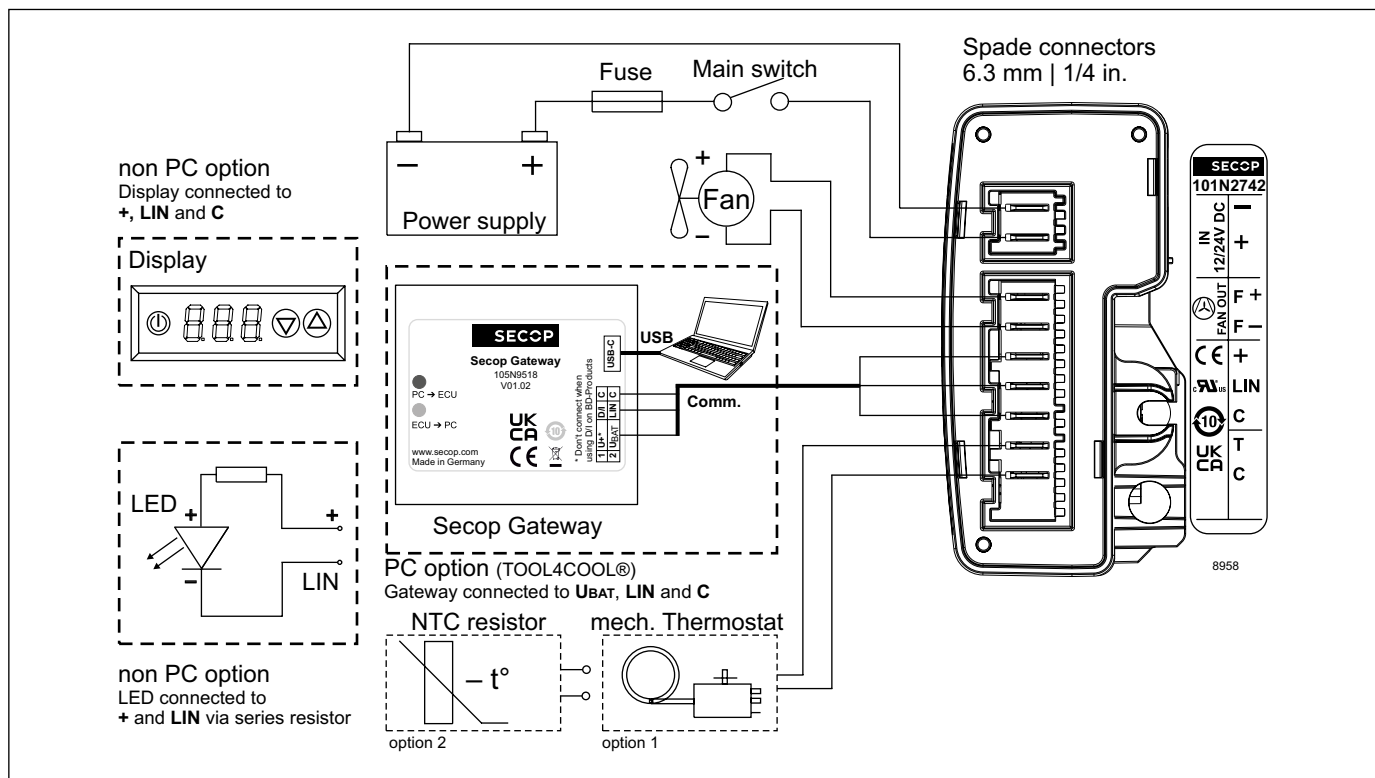


Brazing on BD Nano Discharge Connector (BDN45F, BDN50K, BDN45F-A, BDN50K-A, MB3CKV, and BDN-EV)

Secop BDN45F/-A, BDN50K/-A, MB3CKV, BDN-EV compressors use a special discharge connector element (see figure 2) that is directly connected to the discharge tube to optimize energy consumption.

This element is made from plastic and sensitive to high heat exposure.

When brazing a tube into the discharge connector (see figure 1) please ensure that the area with the discharge connector element never exceeds 150°C / 302°F.

Don't heat up the bottom of the connector directly.

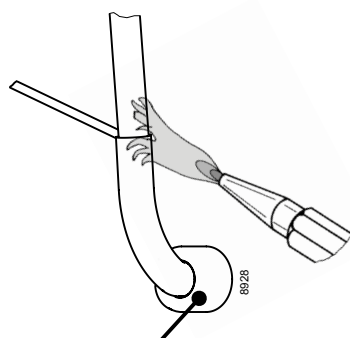

**! max. 150°C/302°F !
at socket**

brazing solder: silver with flux

Use a fork burner (see figure 3) and/or a damp cloth, if necessary. A protective plate can also serve to protect the discharge connector element from direct heat from a flame.

Do not braze longer than 10 seconds and wait for 5 minutes for the next soldering attempt.

Further information:

Product Bulletin – Brazing Technique for Compressor Connectors (DES.N.600.A1.02)



Fig.1 BDN45F discharge connector

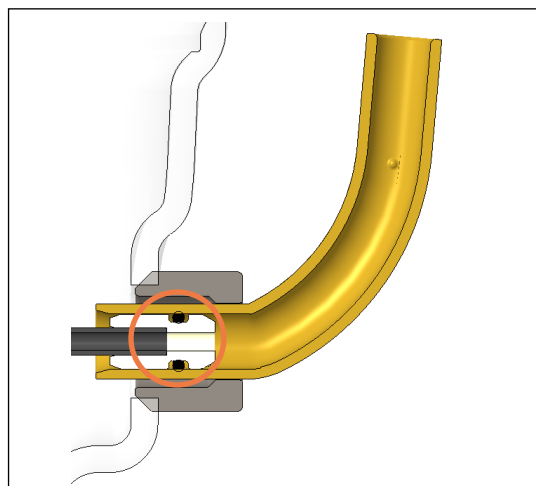


Fig.2 Discharge connector element

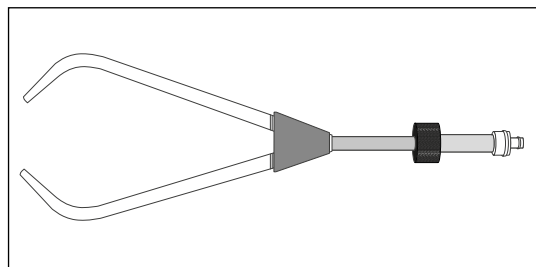


Fig.3 Fork burner