

Model
NLE12.6MF.2

Sales code:
105G6387

Compressor Data

Refrigerant(s)	R134a / R513A
Refr. charge - tech. limit	600g / 21.16oz
Weight	11.50 kg / 25.35lbs
Displacement	12.55 cm³ / 0.77cu.in
Compressors on pallet	80



General – Configurations With NLE12.6MF.2

	Conf. 1	Conf. 2	Conf. 3	Conf. 4	Conf. 5	Conf. 6	Conf. 7	Conf. 8	Conf. 9
Motor configuration	CSIR	eRSIR	eRSCR	CSIR	eRSCR	CSIR	CSIR	eRSIR	eRSIR
Power supply (nominal)	220-240 V/50 Hz	220-240 V/50 Hz	220-240 V/50 Hz	220-240 V/60 Hz	220-240 V/60 Hz	220-240 V/50 Hz	220-240 V/60 Hz	220-240 V/50 Hz	220-240 V/60 Hz
Number of phases	1	1	1	1	1	1	1	1	1
Voltage range	198-254 V	198-254 V	198-254 V	198-254 V	198-254 V	198-254 V	198-254 V	198-254 V	198-254 V
Approvals	CCC	CCC	CCC	CCC	CCC	CCC	CCC	CCC	CCC
Starting torque	HST	LST	LST	HST	LST	HST	HST	LST	LST
Refrigerant	R134a	R134a	R134a	R134a	R134a	R513A	R513A	R513A	R513A
Application	LBP+MBP	LBP+MBP	LBP+MBP	LBP	LBP	LBP+MBP	LBP	LBP+MBP	LBP
Hot gas defrost	OK	OK	OK	OK	OK	OK	OK	OK	OK
Long interval pull down	OK	OK	OK	–	–	OK	–	OK	–

Application Notes

- Provision for PE Grounding is located at the PE Stamp on the compressor

Model
NLE12.6MF.2

Sales code:
105G6387

Compressor Design


Oil type	POE	Winding resistance main	4.900 Ohm
Oil viscosity	19,2cSt	Winding resistance aux	8.90 Ohm
Oil quantity	295 / 9.98fl.oz	Max. winding temp.	125 °C
Free gas volume comp.	2,360 cm ³ / 79.80fl.oz	Max. discharge temp.	120°C / 248°F
Motor protection	internal		

Compressor Dimensions

Housing


A Height	203mm / 7.99in
B Height	197mm / 7.76in
C Length shell	205mm / 8.07in
D Length w. cover	254mm / 10.00in
E Width	166mm / 6.54in

[Find 3D Model here](#)

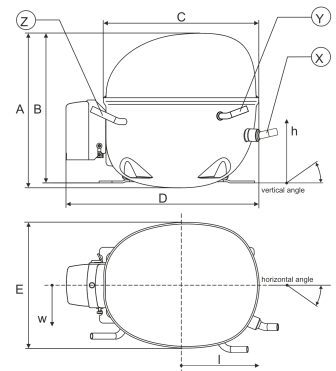

Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 8.11–8.29 / 0.32–0.33in	øi 6.11–6.29 / 0.24–0.25in	øi 6.11–6.29 / 0.24–0.25in
Material	CU	CU	CU
Horizontal angle ±2°	0°	0°	0°
Vertical angle ±2°	15°	21°	155°
Position l/h/w [mm]	132/68.5/56.7 / 5.20/2.70/2.23in	94/101.7/81 / 3.70/4.00/3.19in	-109.3/94.3/72 / -4.30/3.71/2.83in
Straight tube l. [mm]	12 / 0.47in	12 / 0.47in	12 / 0.47in


Mounting Accessories

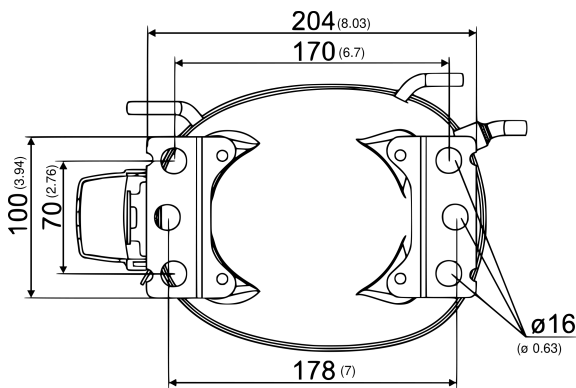

Bolt joint



Snap-on



Dimensions in mm [in]

	one comp.	multi pack
Bolt joint M6 Ø16mm	118-1917	118-1918
Bolt joint Ø1/4" Ø16mm	118-1946	-
Snap-on Ø7,3 Ø16mm	118-1947	118-1919

Model

NLE12.6MF.2

Configuration 1

Sales code:

105G6387

Configuration

Motor configuration	CSIR
Power supply (nominal)	220-240 V/50 Hz 1~
Refrigerant	R134a
Application	LBP+MBP
Voltage range	198-254 V
Starting torque	HST
Approvals	CCC
Starting device type	relay
Run capacitor	-/-
Start capacitor	80 µF
LRA (locked rotor amps / 4s/ U(N))	13.65 A
RLA (rated load amps / 1s/ U(N))	2.8 A
Cut in current (U(N))	13.65 A

Ambient/ machine room temperatures minimum /maximum


Ambient temperature range: 10 - 43°C / 50 - 109°F

Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling

fan 3m/s

Electrical Accessories / Wiring Diagram

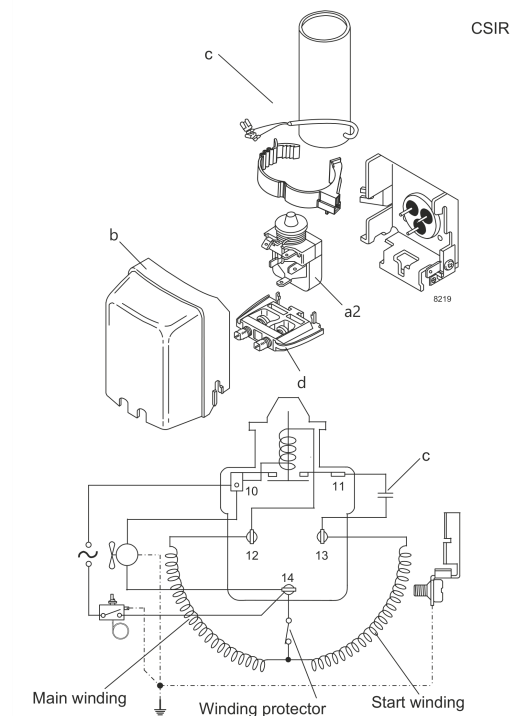

[View full size](#)

Components

a2 relay 117U6005

c start capacitor (80µF) 117U5015



b plastic cover 103N2010

d cord relief 103N1010

Alternative components

b plastic cover 103N2011

Operation Pressure Range

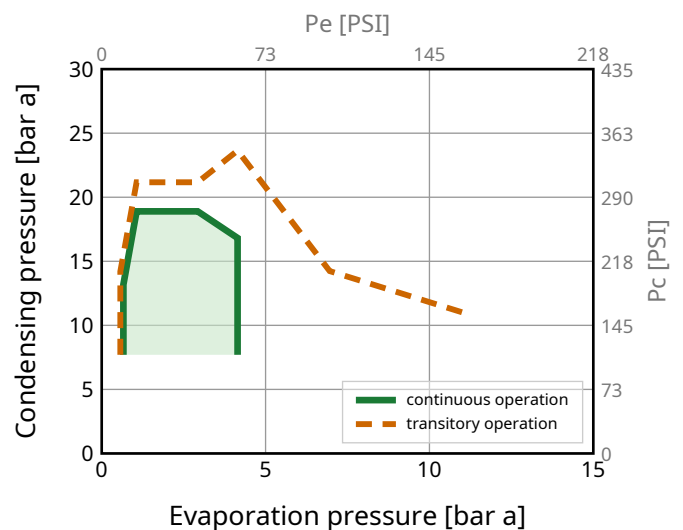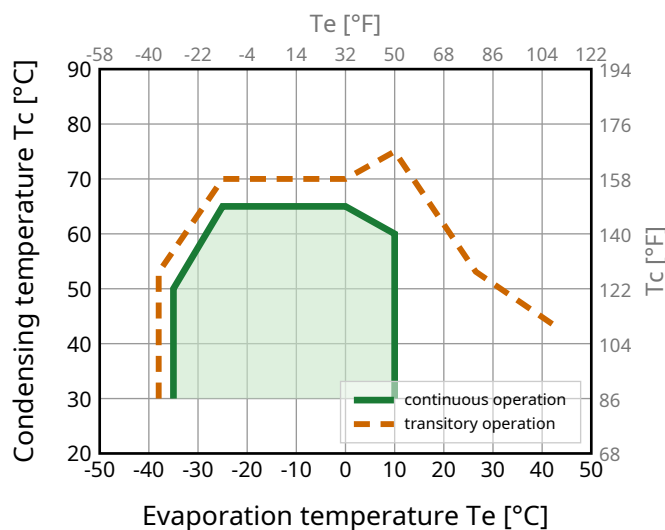

Model
NLE12.6MF.2

Configuration 1

Sales code:
105G6387

Standard Conditions

R134a, 220 V/50 Hz, CSIR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	m	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	354	1210	305	1.48	5.05	240	2.05	6.88	ASHRAE LBP
-25 -13	55 131	32 89.6	55 131	265	906	228	1.16	3.96	228	2.03	6.33	CECOMAF LBP
-35 -31	40 104	20 68	40 104	197	672	169	1.14	3.87	174	1.96	4.31	EN12900 LBP
-6.7 20	54.4 129.9	35 95	46.1 115	737	2516	634	1.98	6.76	372	2.43	16.05	ASHRAE MBP
-10 14	55 131	32 89.6	55 131	567	1935	488	1.65	5.63	344	2.34	13.67	CECOMAF MBP
-10 14	45 113	20 68	45 113	658	2246	566	2.00	6.82	329	2.29	15.35	EN12900 MBP

Performance Tables

R134a, 220 V/50 Hz, CSIR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	m
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	197	673	170	1.12	3.81	176	1.97	4.25
-30	-22	242	824	208	1.22	4.15	198	1.98	5.21
-20	-4	409	1396	352	1.59	5.43	257	2.09	8.87
-10	14	682	2327	586	2.07	7.07	329	2.29	14.89
0	32	1060	3617	912	2.60	8.86	408	2.56	23.39
10	50	1544	5267	1327	3.17	10.81	487	2.85	34.55

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	198	676	170	1.12	3.81	178	1.98	4.70
-30	-22	218	745	188	1.09	3.73	200	1.99	5.19
-20	-4	339	1157	292	1.29	4.41	263	2.10	8.11
-10	14	567	1935	488	1.65	5.63	344	2.34	13.67
0	32	902	3077	776	2.06	7.04	437	2.66	21.99
10	50	1344	4584	1155	2.51	8.57	535	3.04	33.29

Model

NLE12.6MF.2

Configuration 2

Sales code:

105G6387

Configuration

Motor configuration	eRSIR
Power supply (nominal)	220-240 V/50 Hz 1~
Refrigerant	R134a
Application	LBP+MBP
Voltage range	198-254 V
Starting torque	LST
Approvals	CCC
Starting device type	e-PTC
Run capacitor	-/-
Start capacitor	-/-
LRA (locked rotor amps / 4s/ U(N))	13.65 A
RLA (rated load amps / 1s/ U(N))	2.8 A
Cut in current (U(N))	13.65 A

Ambient/ machine room temperatures minimum /maximum


Ambient temperature range: 10 - 43°C / 50 - 109°F

Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling

fan 3m/s

Electrical Accessories / Wiring Diagram

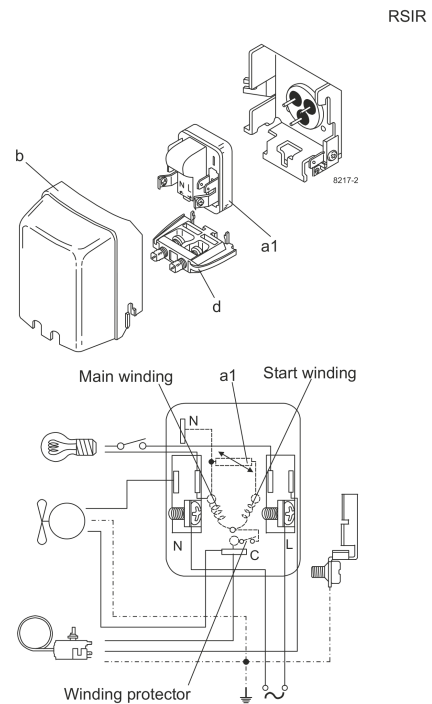

Components

a1 e-PTC starter (220V, 250hm, 4.8mm) 103N0050



b plastic cover 103N2010

d cord relief 103N1010

Alternative components

b plastic cover 103N2011

Operation Pressure Range

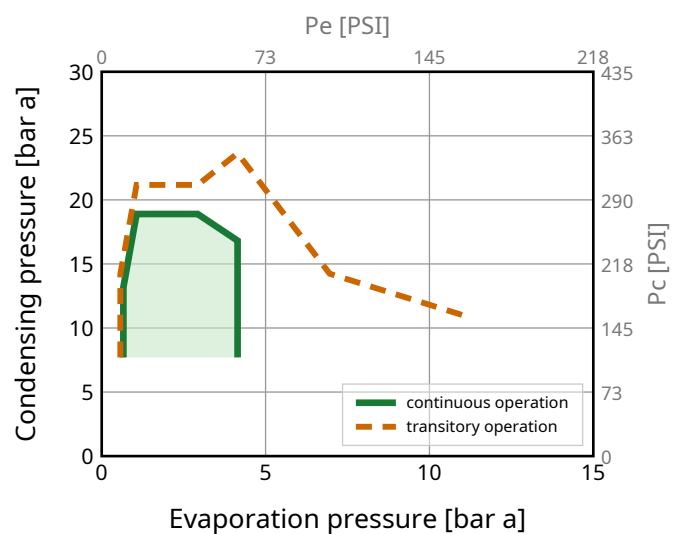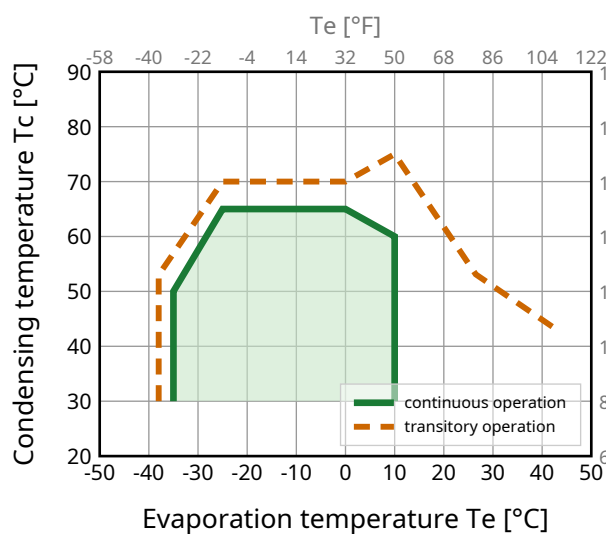

Model

NLE12.6MF.2

Configuration 2

Sales code:

105G6387

Standard Conditions

R134a, 220 V/50 Hz, eRSIR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	m	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	354	1210	305	1.48	5.05	240	2.05	6.88	ASHRAE LBP
-25 -13	55 131	32 89.6	55 131	265	906	228	1.16	3.96	228	2.03	6.33	CECOMAF LBP
-35 -31	40 104	20 68	40 104	197	672	169	1.14	3.87	174	1.96	4.31	EN12900 LBP
-6.7 20	54.4 129.9	35 95	46.1 115	737	2516	634	1.98	6.76	372	2.43	16.05	ASHRAE MBP
-10 14	55 131	32 89.6	55 131	567	1935	488	1.65	5.63	344	2.34	13.67	CECOMAF MBP
-10 14	45 113	20 68	45 113	658	2246	566	2.00	6.82	329	2.29	15.35	EN12900 MBP

Performance Tables

R134a, 220 V/50 Hz, eRSIR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	m
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	197	673	170	1.12	3.81	176	1.97	4.25
-30	-22	242	824	208	1.22	4.15	198	1.98	5.21
-20	-4	409	1396	352	1.59	5.43	257	2.09	8.87
-10	14	682	2327	586	2.07	7.07	329	2.29	14.89
0	32	1060	3617	912	2.60	8.86	408	2.56	23.39
10	50	1544	5267	1327	3.17	10.81	487	2.85	34.55

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	198	676	170	1.12	3.81	178	1.98	4.70
-30	-22	218	745	188	1.09	3.73	200	1.99	5.19
-20	-4	339	1157	292	1.29	4.41	263	2.10	8.11
-10	14	567	1935	488	1.65	5.63	344	2.34	13.67
0	32	902	3077	776	2.06	7.04	437	2.66	21.99
10	50	1344	4584	1155	2.51	8.57	535	3.04	33.29

Model

NLE12.6MF.2

Configuration 3

Sales code:

105G6387

Configuration

Motor configuration	eRSCR
Power supply (nominal)	220-240 V/50 Hz 1~
Refrigerant	R134a
Application	LBP+MBP
Voltage range	198-254 V
Starting torque	LST
Approvals	CCC
Starting device type	e-PTC
Run capacitor	4 μF
Start capacitor	-/-
LRA (locked rotor amps / 4s/ U(N))	13.65 A
RLA (rated load amps / 1s/ U(N))	2.8 A
Cut in current (U(N))	13.65 A

Ambient/ machine room temperatures minimum /maximum


Ambient temperature range: 10 - 43°C / 50 - 109°F

Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling

fan 3m/s

Electrical Accessories / Wiring Diagram

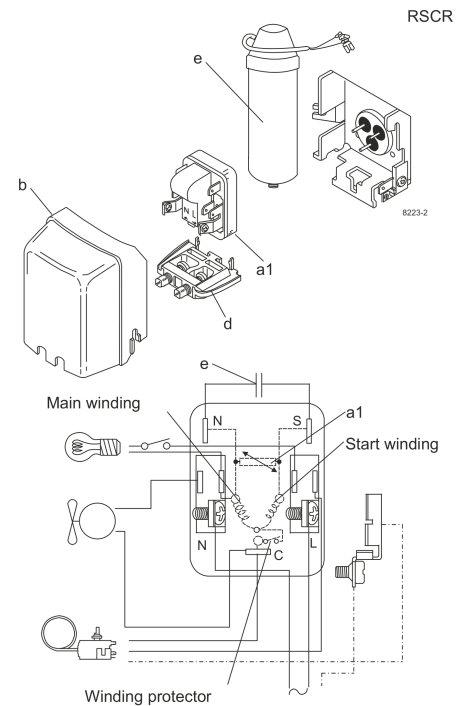

Components

a1 e-PTC starter (220V, 250hm, 4.8mm) 103N0050

e run capacitor (4 μ F, 4.8mm) 117-7119

b plastic cover 103N2010

d cord relief 103N1010


bracket for run capacitor 117-0300

screw M4x8mm 117-0301

Alternative components

b plastic cover 103N2011

Operation Pressure Range

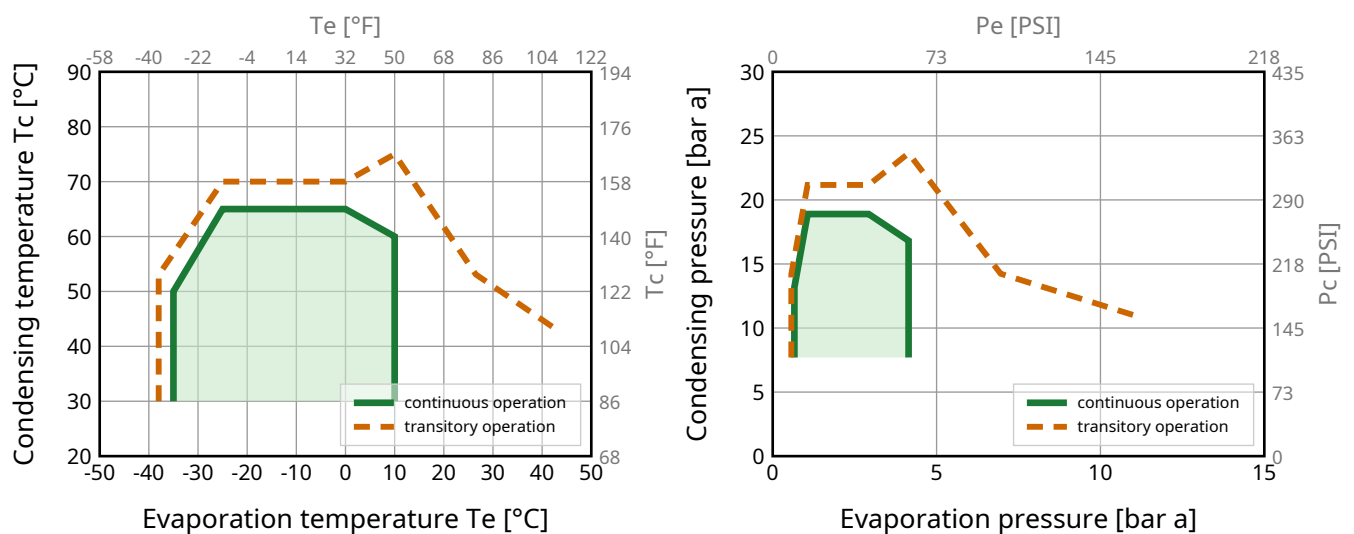

Model
NLE12.6MF.2

Configuration 3

Sales code:
105G6387

Standard Conditions

R134a, 220 V/50 Hz, eRSCR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	m	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	360	1229	310	1.55	5.27	233	2.00	6.99	ASHRAE LBP
-25 -13	55 131	32 89.6	55 131	270	920	232	1.21	4.14	222	1.98	6.43	CECOMAF LBP
-35 -31	40 104	20 68	40 104	200	682	172	1.19	4.05	169	1.90	4.38	EN12900 LBP
-6.7 20	54.4 129.9	35 95	46.1 115	749	2555	644	2.07	7.06	362	2.36	16.30	ASHRAE MBP
-10 14	55 131	32 89.6	55 131	576	1965	495	1.72	5.88	334	2.27	13.88	CECOMAF MBP
-10 14	45 113	20 68	45 113	669	2282	575	2.09	7.13	320	2.23	15.59	EN12900 MBP

Performance Tables

R134a, 220 V/50 Hz, eRSCR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	m
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	200	684	172	1.17	3.99	172	1.91	4.32
-30	-22	245	837	211	1.27	4.34	193	1.93	5.29
-20	-4	416	1418	357	1.66	5.67	250	2.03	9.01
-10	14	693	2363	596	2.16	7.38	320	2.23	15.13
0	32	1077	3674	926	2.71	9.26	397	2.48	23.75
10	50	1568	5349	1348	3.31	11.30	474	2.77	35.09

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	201	686	173	1.17	3.97	173	1.93	4.78
-30	-22	222	757	191	1.14	3.89	194	1.93	5.28
-20	-4	344	1175	296	1.35	4.60	255	2.05	8.24
-10	14	576	1965	495	1.72	5.88	334	2.27	13.88
0	32	916	3125	788	2.16	7.36	425	2.58	22.33
10	50	1365	4656	1174	2.62	8.96	520	2.95	33.81

Model

NLE12.6MF.2

Configuration 4

Sales code:

105G6387

Configuration

Motor configuration	CSIR
Power supply (nominal)	220-240 V/60 Hz 1~
Refrigerant	R134a
Application	LBP
Voltage range	198-254 V
Starting torque	HST
Approvals	CCC
Starting device type	relay
Run capacitor	-/-
Start capacitor	80 µF
LRA (locked rotor amps / 4s/ U(N))	13.65 A
RLA (rated load amps / 1s/ U(N))	2.8 A
Cut in current (U(N))	13.65 A

Ambient/ machine room temperatures minimum /maximum


Ambient temperature range: 10 - 43°C / 50 - 109°F

Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling

fan 3m/s

Electrical Accessories / Wiring Diagram

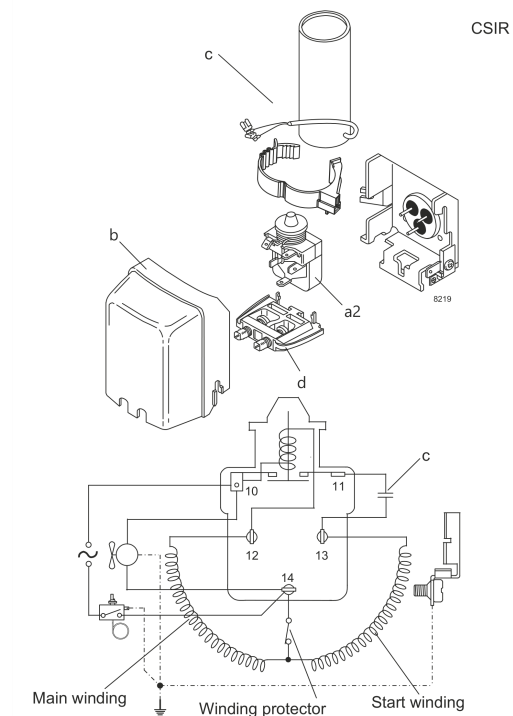

[View full size](#)

Components

a2 relay 117U6005

c start capacitor (80µF) 117U5015



b plastic cover 103N2010

d cord relief 103N1010

Alternative components

b plastic cover 103N2011

Operation Pressure Range

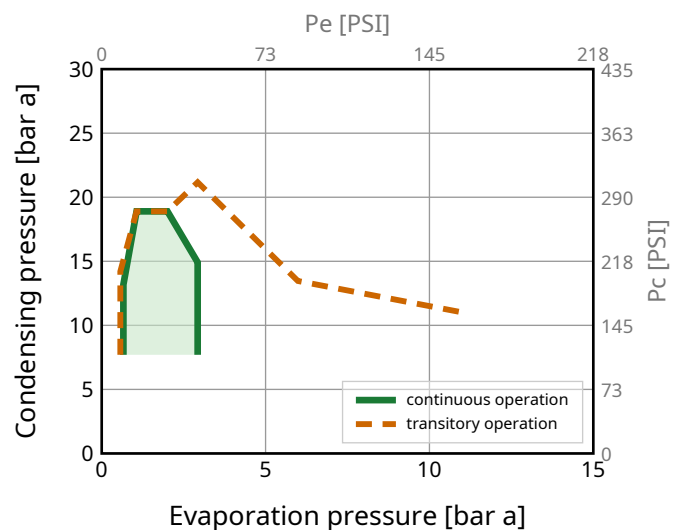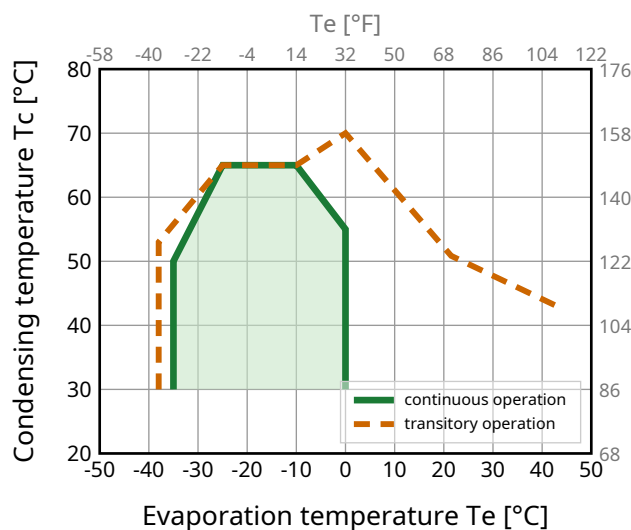

Model
NLE12.6MF.2

Configuration 4

Sales code:
105G6387

Standard Conditions

R134a, 220 V/60 Hz, CSIR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	m	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	427	1457	367	1.50	5.10	286	2.45	8.29	ASHRAE LBP
-25 -13	55 131	32 89.6	55 131	320	1091	275	1.17	4.00	273	2.42	7.62	CECOMAF LBP
-35 -31	40 104	20 68	40 104	237	809	204	1.15	3.91	207	2.33	5.19	EN12900 LBP
-6.7 20	54.4 129.9	35 95	46.1 115	888	3031	764	2.00	6.82	444	2.90	19.34	ASHRAE MBP
-10 14	55 131	32 89.6	55 131	683	2330	587	1.67	5.68	410	2.79	16.47	CECOMAF MBP
-10 14	45 113	20 68	45 113	793	2706	682	2.02	6.89	393	2.73	18.50	EN12900 MBP

Performance Tables

R134a, 220 V/60 Hz, CSIR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	m
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	238	811	204	1.13	3.85	210	2.35	5.12
-30	-22	291	993	250	1.23	4.19	237	2.36	6.28
-20	-4	493	1682	424	1.61	5.48	307	2.50	10.69
-10	14	822	2803	706	2.09	7.13	393	2.73	17.94
0	32	1277	4357	1098	2.62	8.95	487	3.05	28.18
10	50	1860	6345	1599	3.20	10.92	581	3.40	41.62
15	59	2198	7501	1891	3.52	11.99	626	3.59	49.67

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	239	814	205	1.13	3.85	212	2.37	5.67
-30	-22	263	898	226	1.10	3.76	238	2.37	6.26
-20	-4	409	1394	351	1.30	4.45	313	2.51	9.77
-10	14	683	2330	587	1.67	5.68	410	2.79	16.47
0	32	1086	3707	934	2.08	7.11	521	3.17	26.49
10	50	1619	5523	1392	2.54	8.66	638	3.62	40.10
15	59	1933	6596	1663	2.78	9.48	696	3.86	48.39

Model

NLE12.6MF.2

Configuration 5

Sales code:

105G6387

Configuration

Motor configuration	eRSCR
Power supply (nominal)	220-240 V/60 Hz 1~
Refrigerant	R134a
Application	LBP
Voltage range	198-254 V
Starting torque	LST
Approvals	CCC
Starting device type	e-PTC
Run capacitor	4 μF
Start capacitor	-/-
LRA (locked rotor amps / 4s/ U(N))	13.65 A
RLA (rated load amps / 1s/ U(N))	2.8 A
Cut in current (U(N))	13.65 A

Ambient/ machine room temperatures minimum /maximum


Ambient temperature range: 10 - 43°C / 50 - 109°F

Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling

fan 3m/s

Electrical Accessories / Wiring Diagram

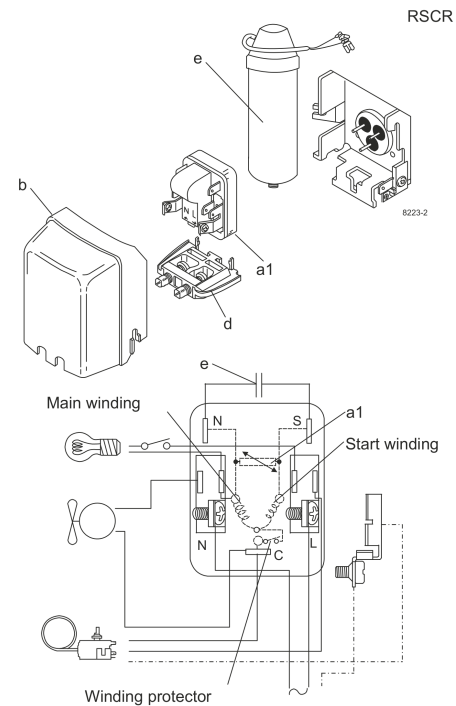

Components

a1 e-PTC starter (220V, 250hm, 4.8mm) 103N0050

e run capacitor (4 μ F, 4.8mm) 117-7119

b plastic cover 103N2010

d cord relief 103N1010



bracket for run capacitor 117-0300

screw M4x8mm 117-0301

Alternative components

b plastic cover 103N2011

Operation Pressure Range

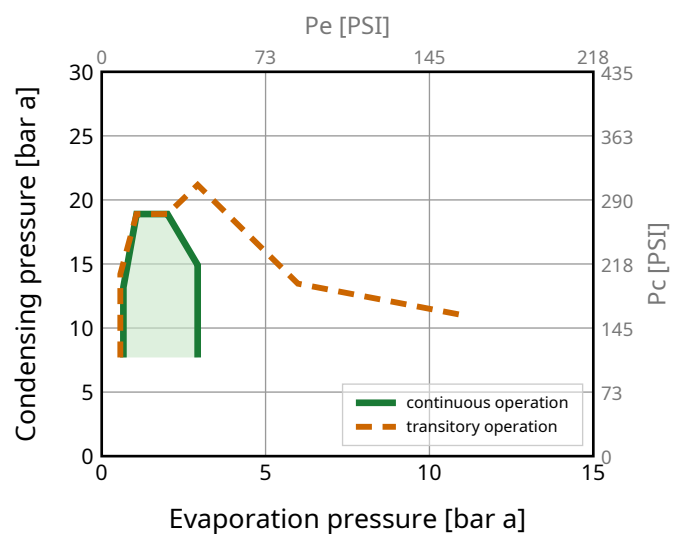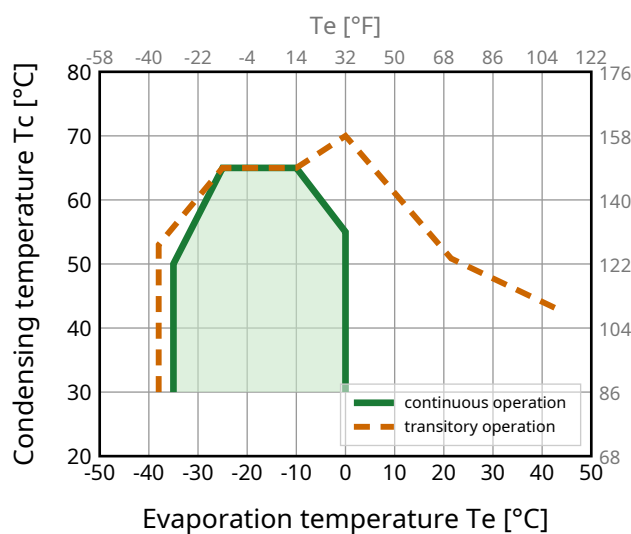

Model

NLE12.6MF.2

Configuration 5

Sales code:

105G6387

Standard Conditions

R134a, 220 V/60 Hz, eRSCR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	m	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	434	1480	373	1.56	5.33	278	2.38	8.42	ASHRAE LBP
-25 -13	55 131	32 89.6	55 131	325	1108	279	1.23	4.18	265	2.36	7.74	CECOMAF LBP
-35 -31	40 104	20 68	40 104	241	822	207	1.20	4.08	201	2.27	5.27	EN12900 LBP
-6.7 20	54.4 129.9	35 95	46.1 115	902	3078	776	2.09	7.12	432	2.82	19.64	ASHRAE MBP
-10 14	55 131	32 89.6	55 131	694	2367	597	1.74	5.93	399	2.71	16.73	CECOMAF MBP
-10 14	45 113	20 68	45 113	806	2749	693	2.11	7.20	382	2.66	18.79	EN12900 MBP

Performance Tables

R134a, 220 V/60 Hz, eRSCR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	m
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	241	824	208	1.18	4.03	205	2.28	5.20
-30	-22	296	1009	254	1.28	4.38	230	2.30	6.38
-20	-4	501	1708	431	1.68	5.73	298	2.43	10.85
-10	14	834	2847	718	2.19	7.46	382	2.66	18.22
0	32	1297	4426	1116	2.74	9.35	474	2.96	28.62
10	50	1889	6444	1624	3.34	11.41	565	3.31	42.27
15	59	2233	7618	1920	3.67	12.53	608	3.49	50.44

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	242	827	208	1.18	4.02	206	2.30	5.75
-30	-22	267	912	230	1.15	3.93	232	2.31	6.36
-20	-4	415	1416	357	1.36	4.65	305	2.44	9.93
-10	14	694	2367	597	1.74	5.93	399	2.71	16.73
0	32	1103	3765	949	2.18	7.43	507	3.08	26.91
10	50	1644	5609	1414	2.65	9.05	620	3.52	40.73
15	59	1963	6699	1689	2.90	9.90	677	3.76	49.15

Model

NLE12.6MF.2

Configuration 6

Sales code:

105G6387

Configuration

Motor configuration	CSIR
Power supply (nominal)	220-240 V/50 Hz 1~
Refrigerant	R513A
Application	LBP+MBP
Voltage range	198-254 V
Starting torque	HST
Approvals	CCC
Starting device type	relay
Run capacitor	-/-
Start capacitor	80 µF
LRA (locked rotor amps / 4s/ U(N))	13.65 A
RLA (rated load amps / 1s/ U(N))	2.8 A
Cut in current (U(N))	13.65 A

Ambient/ machine room temperatures minimum /maximum


Ambient temperature range: 10 - 43°C / 50 - 109°F

Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling

fan 3m/s

Electrical Accessories / Wiring Diagram

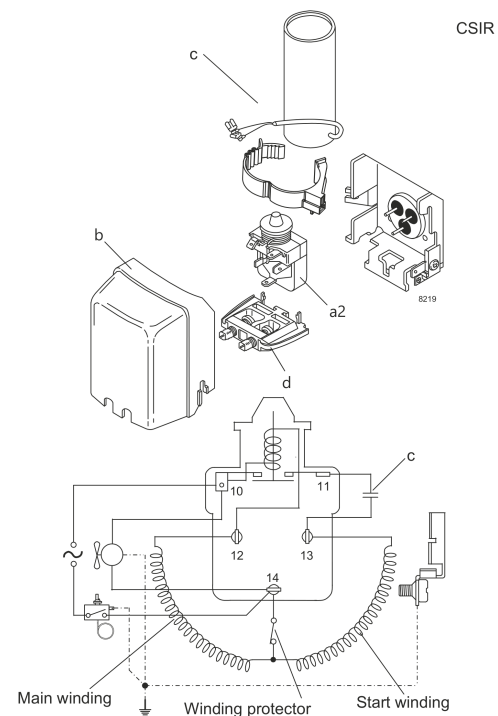
[View full size](#)

Components

a2 relay 117U6005

c start capacitor (80µF) 117U5015


b plastic cover 103N2010

d cord relief 103N1010

Alternative components

b plastic cover 103N2011

Operation Pressure Range

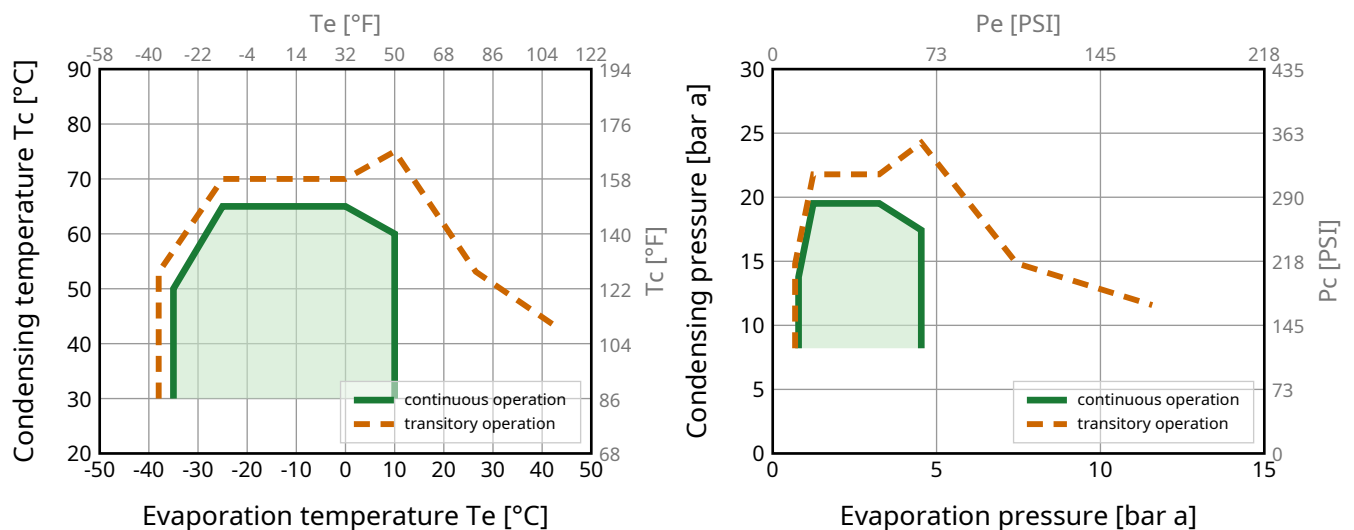

Model

NLE12.6MF.2

Configuration 6

Sales code:

105G6387

Standard Conditions

R513A, 220 V/50 Hz, CSIR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	m	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	394	1345	339	1.52	5.19	259	2.17	8.63	ASHRAE LBP
-25 -13	55 131	32 89.6	55 131	290	988	249	1.17	3.98	249	2.14	8.02	CECOMAF LBP
-35 -31	40 104	20 68	40 104	222	758	191	1.18	4.01	189	1.97	5.59	EN12900 LBP
-6.7 20	54.4 129.9	35 95	46.1 115	773	2637	665	1.96	6.69	394	2.54	19.27	ASHRAE MBP
-10 14	55 131	32 89.6	55 131	588	2005	505	1.61	5.49	365	2.46	16.49	CECOMAF MBP
-10 14	45 113	20 68	45 113	685	2337	589	1.96	6.70	349	2.42	18.55	EN12900 MBP

Performance Tables

R513A, 220 V/50 Hz, CSIR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	m
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	227	776	195	1.17	4.00	194	1.99	5.59
-30	-22	270	920	232	1.25	4.26	216	2.05	6.65
-20	-4	440	1500	378	1.60	5.46	275	2.21	10.91
-10	14	719	2452	618	2.06	7.03	349	2.42	17.99
0	32	1101	3757	947	2.57	8.76	429	2.64	27.89
10	50	1581	5393	1359	3.12	10.63	507	2.86	40.71

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	234	798	201	1.17	3.99	200	2.00	6.44
-30	-22	247	843	212	1.12	3.82	221	2.06	6.82
-20	-4	361	1232	311	1.28	4.36	283	2.23	10.04
-10	14	588	2005	505	1.61	5.49	365	2.46	16.49
0	32	920	3141	792	2.00	6.83	460	2.73	26.17
10	50	1354	4619	1164	2.43	8.28	558	3.00	39.22

Model

NLE12.6MF.2

Configuration 7

Sales code:

105G6387

Configuration

Motor configuration	CSIR
Power supply (nominal)	220-240 V/60 Hz 1~
Refrigerant	R513A
Application	LBP
Voltage range	198-254 V
Starting torque	HST
Approvals	CCC
Starting device type	relay
Run capacitor	-/-
Start capacitor	80 µF
LRA (locked rotor amps / 4s/ U(N))	13.65 A
RLA (rated load amps / 1s/ U(N))	2.8 A
Cut in current (U(N))	13.65 A

Ambient/ machine room temperatures minimum /maximum


Ambient temperature range: 10 - 43°C / 50 - 109°F

Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling

fan 3m/s

Electrical Accessories / Wiring Diagram

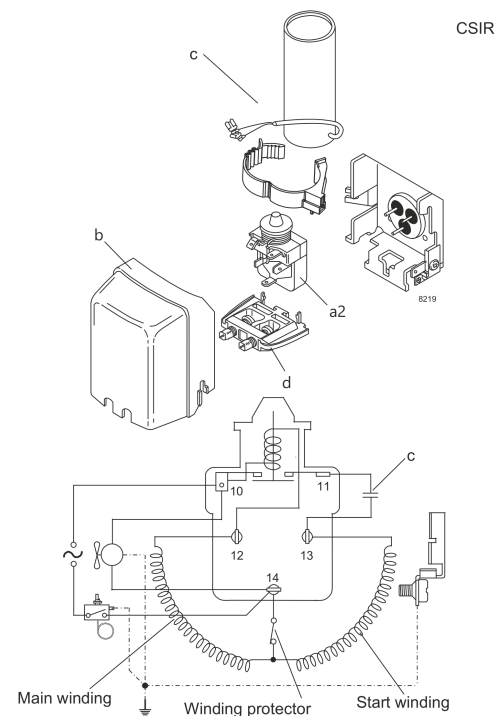

[View full size](#)

Components

a2 relay 117U6005

c start capacitor (80µF) 117U5015



b plastic cover 103N2010

d cord relief 103N1010

Alternative components

b plastic cover 103N2011

Operation Pressure Range

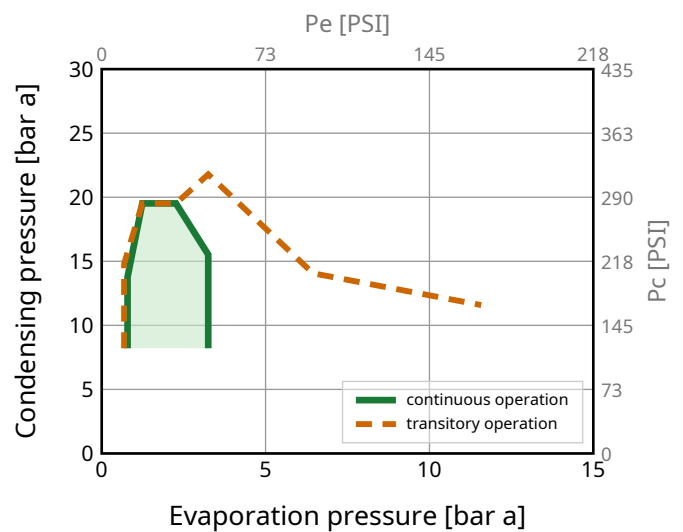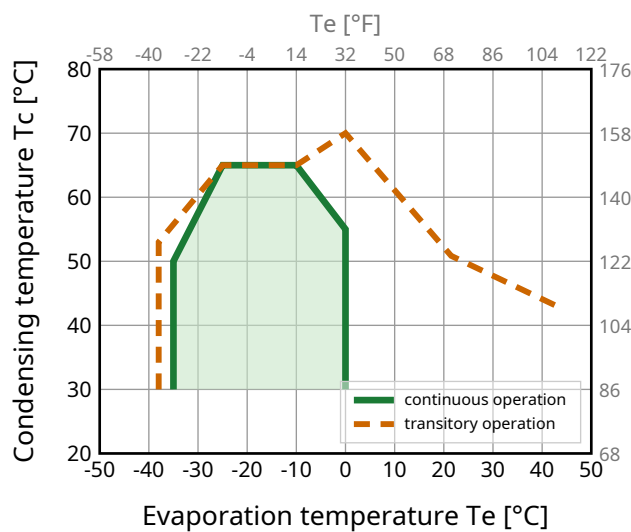

Model

NLE12.6MF.2

Configuration 7

Sales code:

105G6387

Standard Conditions

R513A, 220 V/60 Hz, CSIR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	m	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	475	1620	408	1.51	5.14	315	2.60	10.39	ASHRAE LBP
-25 -13	55 131	32 89.6	55 131	349	1190	300	1.15	3.93	303	2.57	9.66	CECOMAF LBP
-35 -31	40 104	20 68	40 104	268	913	230	1.15	3.92	233	2.37	6.73	EN12900 LBP
-6.7 20	54.4 129.9	35 95	46.1 115	930	3175	800	1.96	6.70	474	3.05	23.19	ASHRAE MBP
-10 14	55 131	32 89.6	55 131	707	2414	608	1.61	5.49	440	2.95	19.85	CECOMAF MBP
-10 14	45 113	20 68	45 113	825	2814	709	1.96	6.70	420	2.90	22.33	EN12900 MBP

Performance Tables

R513A, 220 V/60 Hz, CSIR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	m
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	274	933	235	1.14	3.89	240	2.39	6.73
-30	-22	324	1107	279	1.23	4.20	264	2.46	8.01
-20	-4	529	1806	455	1.59	5.43	332	2.65	13.14
-10	14	865	2952	744	2.06	7.03	420	2.90	21.66
0	32	1325	4522	1140	2.57	8.77	516	3.17	33.57
10	50	1902	6490	1636	3.12	10.66	609	3.42	48.99
15	59	2232	7617	1920	3.43	11.71	651	3.54	58.11

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	281	959	242	1.13	3.85	249	2.42	7.74
-30	-22	297	1014	256	1.09	3.74	271	2.48	8.21
-20	-4	435	1484	374	1.27	4.33	342	2.68	12.09
-10	14	707	2414	608	1.61	5.49	440	2.95	19.85
0	32	1108	3780	953	2.01	6.84	552	3.27	31.50
10	50	1629	5558	1401	2.43	8.30	670	3.60	47.19
15	59	1933	6594	1662	2.66	9.07	727	3.76	56.66

Model

NLE12.6MF.2

Configuration 8

Sales code:

105G6387

Configuration

Motor configuration	eRSIR
Power supply (nominal)	220-240 V/50 Hz 1~
Refrigerant	R513A
Application	LBP+MBP
Voltage range	198-254 V
Starting torque	LST
Approvals	CCC
Starting device type	e-PTC
Run capacitor	-/-
Start capacitor	-/-
LRA (locked rotor amps / 4s/ U(N))	13.65 A
RLA (rated load amps / 1s/ U(N))	2.8 A
Cut in current (U(N))	13.65 A

Ambient/ machine room temperatures minimum /maximum


Ambient temperature range: 10 - 43°C / 50 - 109°F

Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling

fan 3m/s

Electrical Accessories / Wiring Diagram

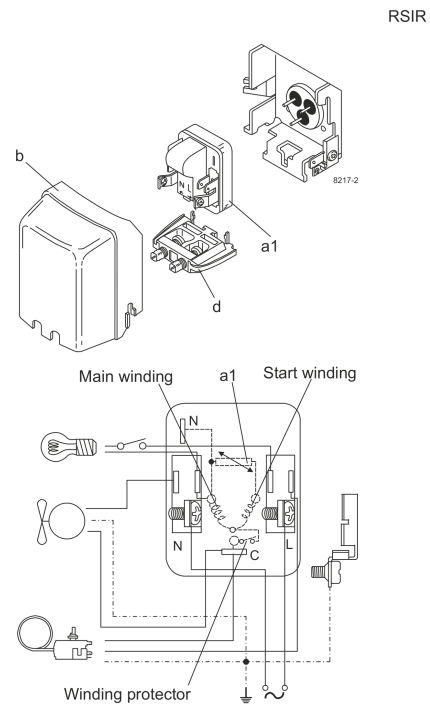

Components

a1 e-PTC starter (220V, 250hm, 4.8mm) 103N0050



b plastic cover 103N2010

d cord relief 103N1010

Alternative components

b plastic cover 103N2011

Operation Pressure Range

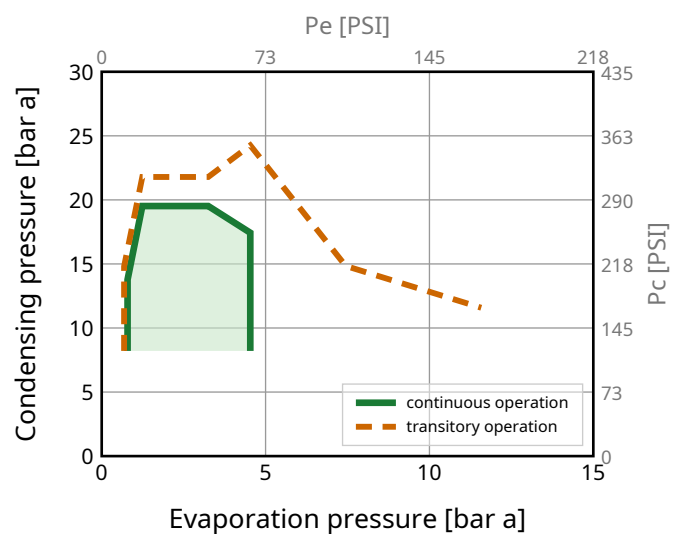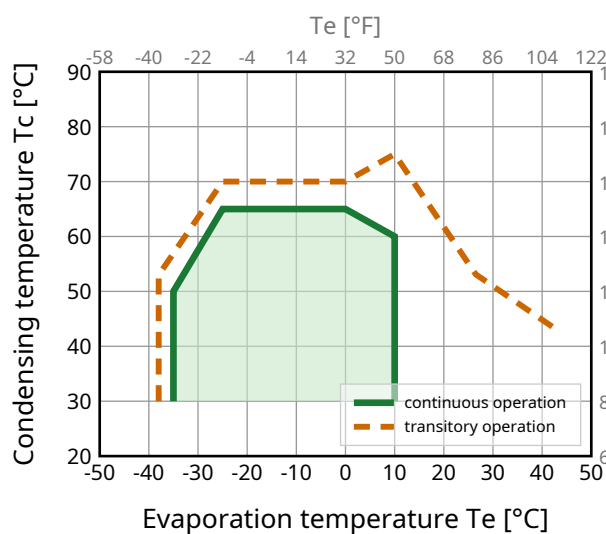

Model

NLE12.6MF.2

Configuration 8

Sales code:

105G6387

Standard Conditions

R513A, 220 V/50 Hz, eRSIR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	m	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	394	1345	339	1.52	5.19	259	2.17	8.63	ASHRAE LBP
-25 -13	55 131	32 89.6	55 131	290	988	249	1.17	3.98	249	2.14	8.02	CECOMAF LBP
-35 -31	40 104	20 68	40 104	222	758	191	1.18	4.01	189	1.97	5.59	EN12900 LBP
-6.7 20	54.4 129.9	35 95	46.1 115	773	2637	665	1.96	6.69	394	2.54	19.27	ASHRAE MBP
-10 14	55 131	32 89.6	55 131	588	2005	505	1.61	5.49	365	2.46	16.49	CECOMAF MBP
-10 14	45 113	20 68	45 113	685	2337	589	1.96	6.70	349	2.42	18.55	EN12900 MBP

Performance Tables

R513A, 220 V/50 Hz, eRSIR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	m
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	227	776	195	1.17	4.00	194	1.99	5.59
-30	-22	270	920	232	1.25	4.26	216	2.05	6.65
-20	-4	440	1500	378	1.60	5.46	275	2.21	10.91
-10	14	719	2452	618	2.06	7.03	349	2.42	17.99
0	32	1101	3757	947	2.57	8.76	429	2.64	27.89
10	50	1581	5393	1359	3.12	10.63	507	2.86	40.71

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	234	798	201	1.17	3.99	200	2.00	6.44
-30	-22	247	843	212	1.12	3.82	221	2.06	6.82
-20	-4	361	1232	311	1.28	4.36	283	2.23	10.04
-10	14	588	2005	505	1.61	5.49	365	2.46	16.49
0	32	920	3141	792	2.00	6.83	460	2.73	26.17
10	50	1354	4619	1164	2.43	8.28	558	3.00	39.22

Model

NLE12.6MF.2

Configuration 9

Sales code:

105G6387

Configuration

Motor configuration	eRSIR
Power supply (nominal)	220-240 V/60 Hz 1~
Refrigerant	R513A
Application	LBP
Voltage range	198-254 V
Starting torque	LST
Approvals	CCC
Starting device type	e-PTC
Run capacitor	-/-
Start capacitor	-/-
LRA (locked rotor amps / 4s/ U(N))	13.65 A
RLA (rated load amps / 1s/ U(N))	2.8 A
Cut in current (U(N))	13.65 A

Ambient/ machine room temperatures minimum /maximum


Ambient temperature range: 10 - 43°C / 50 - 109°F

Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling

fan 3m/s

Electrical Accessories / Wiring Diagram

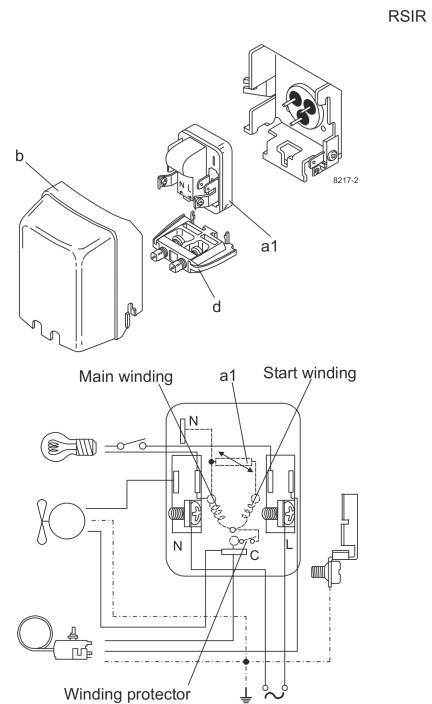

Components

a1 e-PTC starter (220V, 250hm, 4.8mm) 103N0050



b plastic cover 103N2010

d cord relief 103N1010

Alternative components

b plastic cover 103N2011

Operation Pressure Range

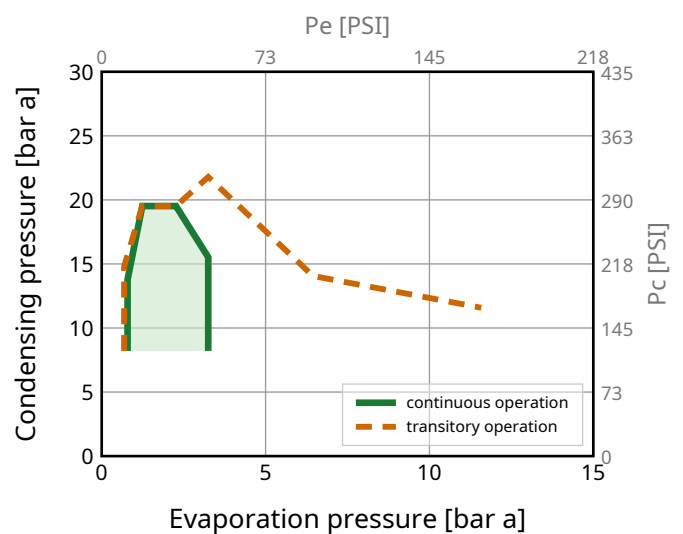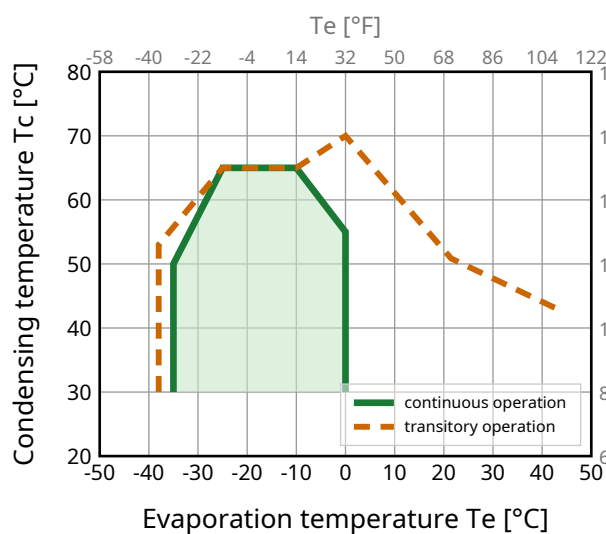

Model

NLE12.6MF.2

Configuration 9

Sales code:

105G6387

Standard Conditions

R513A, 220 V/60 Hz, eRSIR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	m	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	475	1620	408	1.51	5.14	315	2.60	10.39	ASHRAE LBP
-25 -13	55 131	32 89.6	55 131	349	1190	300	1.15	3.93	303	2.57	9.66	CECOMAF LBP
-35 -31	40 104	20 68	40 104	268	913	230	1.15	3.92	233	2.37	6.73	EN12900 LBP
-6.7 20	54.4 129.9	35 95	46.1 115	930	3175	800	1.96	6.70	474	3.05	23.19	ASHRAE MBP
-10 14	55 131	32 89.6	55 131	707	2414	608	1.61	5.49	440	2.95	19.85	CECOMAF MBP
-10 14	45 113	20 68	45 113	825	2814	709	1.96	6.70	420	2.90	22.33	EN12900 MBP

Performance Tables

R513A, 220 V/60 Hz, eRSIR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	m
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	274	933	235	1.14	3.89	240	2.39	6.73
-30	-22	324	1107	279	1.23	4.20	264	2.46	8.01
-20	-4	529	1806	455	1.59	5.43	332	2.65	13.14
-10	14	865	2952	744	2.06	7.03	420	2.90	21.66
0	32	1325	4522	1140	2.57	8.77	516	3.17	33.57
10	50	1902	6490	1636	3.12	10.66	609	3.42	48.99
15	59	2232	7617	1920	3.43	11.71	651	3.54	58.11

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	281	959	242	1.13	3.85	249	2.42	7.74
-30	-22	297	1014	256	1.09	3.74	271	2.48	8.21
-20	-4	435	1484	374	1.27	4.33	342	2.68	12.09
-10	14	707	2414	608	1.61	5.49	440	2.95	19.85
0	32	1108	3780	953	2.01	6.84	552	3.27	31.50
10	50	1629	5558	1401	2.43	8.30	670	3.60	47.19
15	59	1933	6594	1662	2.66	9.07	727	3.76	56.66