

Model

Designation	SC15MLX.2	208-230V/60Hz 1~	Sales code:	104L2803
-------------	------------------	------------------	-------------	-----------------

Compressor design

Oil type	Polyolester	Refrigerant(s)	R404A, R507
Oil viscosity	32cSt	Displacement	15,28cm ³ / 0,93cu.in
Oil quantity	550cm ³ / 18,6fl.oz	Compressors on pallet	80
Refr. charge - tech. limit	1300g / 45,9oz		
Free gas volume comp.	1460cm ³ / 49,4fl.oz		
Weight	13,7kg / 30,2lbs		
Motor protection	1# internal		
Winding resistance main	2,6Ω (at 25°C)		
Winding resistance aux	13Ω (at 25°C)		
Max. winding temp.	125°C / 257°F		
Max. discharge temp.	130°C / 266°F		



General - Configurations with SC15MLX.2

Conf. 1

Motor configuration	CSCR
Power supply (nominal)	208-230V/60Hz
Number of phases	1
Voltage range	187-254V
Approvals	UL, KC
Starting torque	HST
Note	- / -

Applications with SC15MLX.2

Conf. 1

Refrigerant	R404A
Application	MBP
System cooling	fan 3m/s
Hot gas defrost	OK
Long interval pull down	OK

Electrical data - Configurations with SC15MLX.2

Conf. 1


Starting device type	relay
Run capacitor	15μF
Start capacitor	125μF
LRA (locked rotor amps / 4s/ U(N))	32A
RLA (rated load amps / 1s/ U(N))	5A
Cut in current (U(N))	

Model			
Designation	SC15MLX.2	208-230V/60Hz 1~	Sales code: 104L2803

Compressor dimensions

Housing	A Height	219mm / 8,62in
	B Height	213mm / 8,39in
	C Length shell	239mm / 9,41in
	D Length w. cover	255mm / 10,04in
	E Width	151mm / 5,94in

Connectors		Suction	Discharge	Process
		X	Y	Z
Diameter	[mm]	øi 9,54-9,72	øi 6,41-6,59	øi 6,41-6,59
	(i:inside, o:outside) [in]	øi 0,38-0,38	øi 0,25-0,26	øi 0,25-0,26
Material		copper	copper	copper
Horizontal angle		±2° 37°	37°	143°
Vertical angle		±2° 30°	0°	150°
Position l/h/w	[mm]	107/193/55	115/110/63	-107/193/55
	[in]	4,2/7,6/2,2	4,5/4,3/2,5	-4,2/7,6/2,2
Straight tube l.	[mm]	12	12	12
	[in]	0,5	0,5	0,5

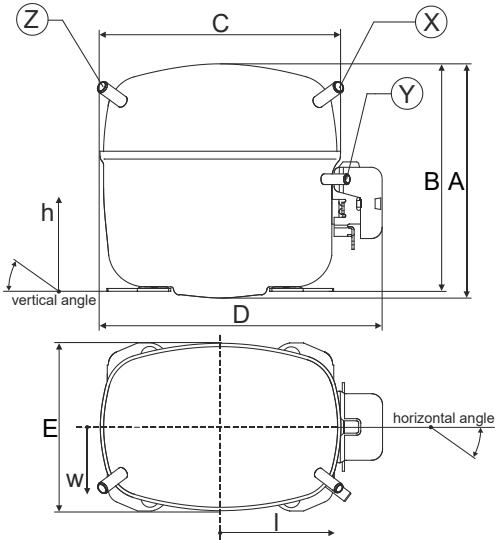

Compressor fixation

Baseplate	[mm]	[inch]
BI	204	8.03
Bw	150	5.9
øE	ø 9.7	ø 0.38

Large holes	[mm]	[inch]
LI	165	6.5
Lw	101.6	4
øL	ø 19	ø 0.75

Small holes	[mm]	[inch]
SI	170	6.7
Sw	70	2.76
øS	ø 16	ø 0.63
QI	127	5
Qw	127	5

Bolt joint



Snap-on

Mounting accessories	one comp.	multi pack
Bolt joint M6 ø16mm	118-1917	118-1918
Bolt joint ø1/4" ø16mm	118-1946	
Bolt joint ø1/4" ø19mm	118-1949	
Snap-on ø7,3 ø16mm	118-1947	118-1919

Application notes

Provision for PE Grounding is located at the PE Stamp on the compressor


Model				
Designation	SC15MLX.2	208-230V/60Hz	Conf. 1	Sales code: 104L2803

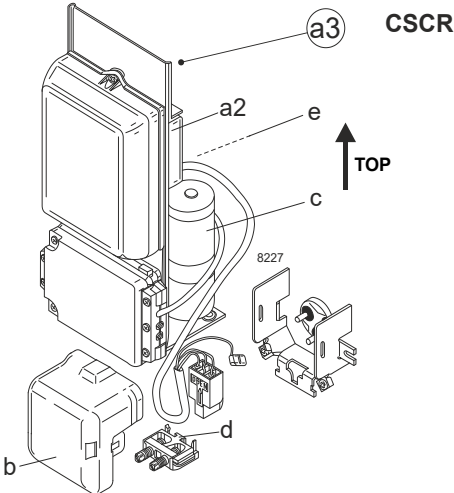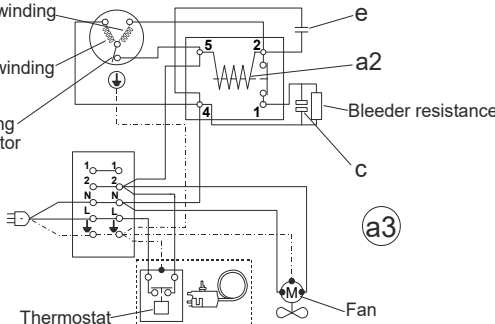Configuration		Electrical accessories / wiring diagram		
Motor configuration	CSCR			
Power supply (nominal)	208-230V/60Hz 1~			
Refrigerant	R404A			
Application	MBP			
Voltage range	187-254V			
Starting torque	HST			
Approvals	UL			
	KC			

Ambient/ machine room temperatures minimum /maximum

Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	fan 3m/s

Operation pressure range

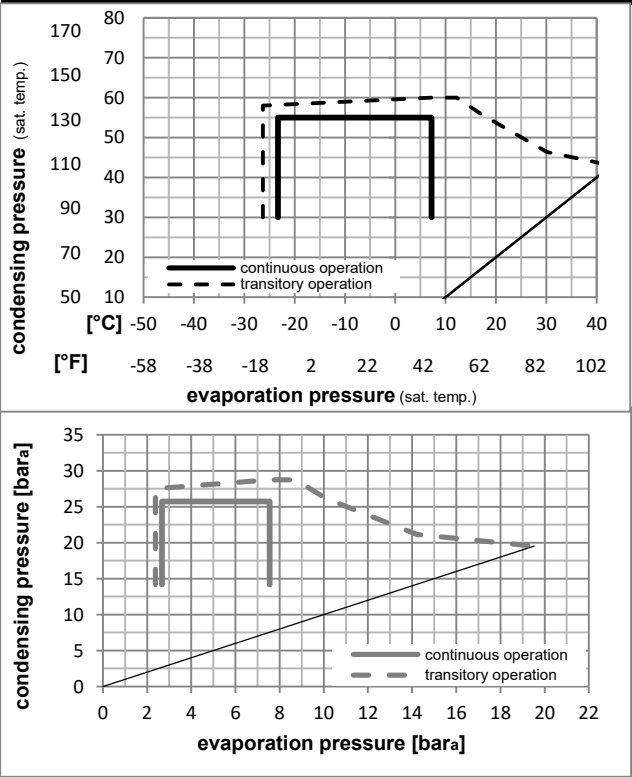

Components		
a3	SC starter kit	117-7058
b	plastic cover	103N2008
d	cord relief	103N1004

Model

Designation **SC15MLX.2** **208-230V/60Hz** Conf. 1 Sales code: **104L2803**

Optimization + standard conditions

R404A, 230V/60Hz, CSCR, fan 3m/s, UL, KC

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)						Power consumption			
											Current consumption			
											Ref. mass flow			