

Model			
Designation	SCE15MNX	220-240V/50Hz 1~	Sales code: 104H8549

Compressor design

Oil type	Polyolester	Refrigerant(s)	R290
Oil viscosity	32cSt	Displacement	15,28cm³ / 0,93cu.in
Oil quantity	541cm³ / 18,3fl.oz	Compressors on pallet	80
Refr. charge - tech. limit	550g / 19,4oz		
Free gas volume comp.	1460cm³ / 49,4fl.oz		
Weight	14,2kg / 31,3lbs		
Motor protection	external		
Winding resistance main	4,07Ω (at 25°C)		
Winding resistance aux	15,88Ω (at 25°C)		
Max. winding temp.	125°C / 257°F		
Max. discharge temp.	130°C / 266°F		



General - Configurations with SCE15MNX

	Conf. 1
Motorconfiguration	CSIR
Power supply (nominal)	220-240V/50Hz
Number of phases	1
Voltage range	198-254V
Approvals	VDE
Starting torque	HST
Note	Protector, relay and cover are included and pre-assembled to compressor.

Applications with SCE15MNX

	Conf. 1
Refrigerant	R290
Application	MBP
System cooling	fan 3m/s
Hot gas defrost	OK
Long interval pull down	OK

Electrical data - Configurations with SCE15MNX


	Conf. 1
Starting device type	relay
Run capacitor	-/-
Start capacitor	80µF
LRA (locked rotor amps / 4s/ U(N))	17,47A
RLA (rated load amps / 1s/ U(N))	2,92A
Cut in current (U(N))	17,47A

Model			
Designation	SCE15MNX	220-240V/50Hz 1~	Sales code: 104H8549


Compressor dimensions

Housing	A Height	219mm / 8,62in
	B Height	213mm / 8,39in
	C Length shell	218mm / 8,58in
	D Length w. cover	255mm / 10,04in
	E Width	151mm / 5,94in

Connectors	Suction	Discharge	Process
	X	Y	Z
Diameter [mm]	øi 10,11-10,29	øi 6,11-6,29	øi 6,11-6,29
(i:inside, o:outside) [in]	øi 0,4-0,41	øi 0,24-0,25	øi 0,24-0,25
Material	copper	copper	copper
Horizontal angle ±2°	37°	37°	143°
Vertical angle ±2°	30°	0°	150°
Position l/h/w [mm]	107/193/55	115/110/63	-107/193/55
	4,2/7,6/2,2	4,5/4,3/2,5	-4,2/7,6/2,2
Straight tube l. [mm]	12	12	12
	0,5	0,5	0,5

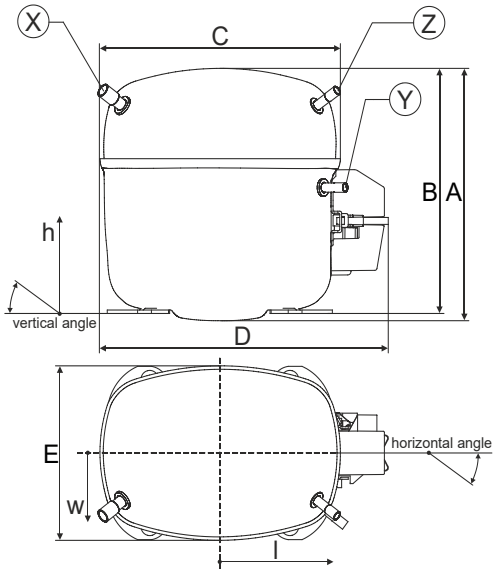

Compressor fixation

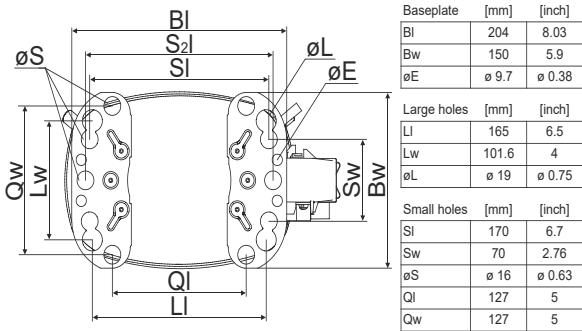


Mounting accessories	one comp.	multi pack
Bolt joint M6 ø16mm	118-1917	118-1918
Bolt joint ø1/4" ø16mm	118-1946	
Bolt joint ø1/4" ø19mm	118-1949	
Snap-on ø7,3 ø16mm	118-1947	118-1919


Application notes

Provision for PE Grounding is located at the PE Stamp on the compressor

Bolt joint




Snap-on




Model				
Designation	SCE15MNX	220-240V/50Hz	Conf. 1	Sales code: 104H8549

Configuration	Electrical accessories / wiring diagram			
Motorconfiguration	CSIR			
Power supply (nominal)	220-240V/50Hz 1~			
Refrigerant	R290			
Application	MBP			
Voltage range	198-254V			
Starting torque	HST			
Approvals	VDE			

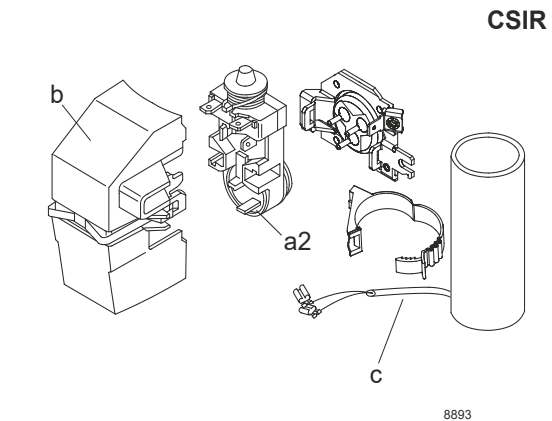


Ambient/ machine room temperatures minimum /maximum

Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	fan 3m/s

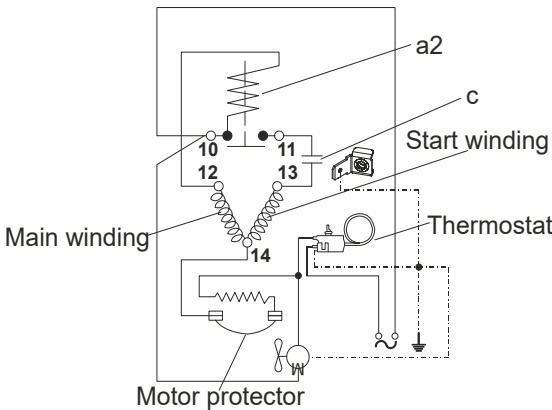

Operation pressure range

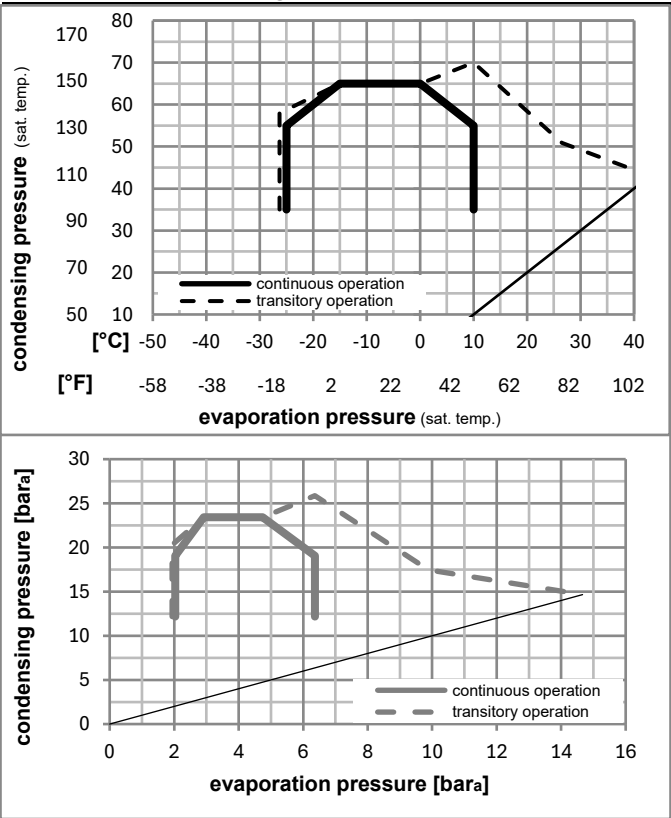

Components (relay (a2)+ cover (b): pre-assembled)

a2	assy. relay + ext. protector (T1133)	117U7405
c	start capacitor (80μF)	117U5017
d	cord relief	103N1004
b	plastic cover + clamp	117U1033

Model					
Designation	SCE15MNX	220-240V/50Hz	Conf. 1	Sales code:	104H8549
Optimization + standard conditions			R290, 230V/50Hz, CSIR, fan 3m/s, VDE		

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)			Return gas temp.		Liquid temp.		Cooling capacity			COP		EER		Power consumption		Current consumption		Ref. mass flow	
pe	pc	RGT	Tliq		[W]	[Btu/h]	[kcal/h]												P1	I			m	
[°C]																			[W]	[A]			[kg/h]	
[°F]																								
-7	54	35	46		1268,8	4333	1091,9		2,04	6,96	1,75	622,8	3,37	14,47										ASHRAE MBP
20	130	95	115																					
-10	55	32	55		998,9	3411	859,7		1,69	5,77	1,45	591,4	3,26	12,64										cecomaf MBP
14	131	90	131																					
-10	45	20	45		1121,9	3832	965,5		2,06	7,05	1,78	543,4	3,12	13,78										EN12900 MBP
14	113	68	113																					
-7	49	18	49		1199,1	4095	1032,0		2,03	6,92	1,74	591,7	3,27	15,57										ARI540 MBP
20	120	65	120																					
-10	45	32	45		1168,0	3989	1005,2		2,15	7,34	1,85	543,4	3,12	13,36										opt
14	113	90	113																					
-25	45	32	45		584,9	1998	503,4		1,42	4,85	1,22	411,5	2,66	6,60										opt
-13	113	90	113																					

Performance tables						R290, 230V/50Hz, CSIR, fan 3m/s, VDE					
	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-25	-13	584,9	1998	503,4	1,42	4,85	1,22	411,5	2,66	6,60
cond. pressure	-20	-4	751,4	2566	646,7	1,64	5,61	1,41	457,6	2,82	8,51
pc= 45/113	-15	5	945,4	3229	813,6	1,88	6,43	1,62	502,2	2,98	10,76
return gas temp.	-10	14	1168,0	3989	1005,2	2,15	7,34	1,85	543,4	3,12	13,36
RGT= 32/90	0	32	1703,7	5819	1466,2	2,80	9,55	2,41	609,0	3,36	19,76
liquid temp	5	41	2019,1	6896	1737,7	3,21	10,95	2,76	629,9	3,44	23,62
Tliq= 45/113	10	50	2367,7	8086	2037,7	3,70	12,62	3,18	640,5	3,49	27,98
[°C / °F]	-25	-13	484,7	1655	417,2	1,14	3,90	0,98	424,7	2,65	6,04
cond. pressure	-20	-4	632,6	2160	544,4	1,31	4,49	1,13	481,0	2,85	7,91
pc= 55/131	-15	5	803,6	2744	691,6	1,50	5,11	1,29	537,2	3,06	10,10
return gas temp	-10	14	998,9	3411	859,7	1,69	5,77	1,45	591,4	3,26	12,64
RGT= 32/90	0	32	1466,9	5010	1262,4	2,13	7,29	1,84	687,2	3,63	18,84
liquid temp	5	41	1741,9	5949	1499,1	2,40	8,20	2,07	725,3	3,79	22,59
Tliq= 55/131	10	50	2045,7	6987	1760,6	2,71	9,26	2,33	754,6	3,94	26,82