

Model

SCE25LNDX

Sales code:

104H8420

Compressor Data

Refrigerant(s)	R290
Refr. charge - tech. limit	500g / 17.64oz
Weight	14.90 kg / 32.85lbs
Displacement	25.00 cm3 / 1.53cu.in
Compressors on pallet	48



General – Configurations With SCE25LNDX

–	Conf. 1
Motor configuration	CSCR
Power supply (nominal)	220-240 V/50 Hz
Number of phases	1
Voltage range	198-254 V
Approvals	VDE, CCC, CB
Starting torque	HST
Refrigerant	R290
Application	LBP
Hot gas defrost	OK

Application Notes

- Starter kit(relay), cover and cord relief are included and pre-assembled.
- Provision for PE Grounding is located at the PE Stamp on the compressor

Model
SCE25LNDX

Sales code:
104H8420

Compressor Design


Oil type	POE	Winding resistance main	3.290 Ohm
Oil viscosity	32cSt	Winding resistance aux	10.82 Ohm
Oil quantity	500 / 16.91fl.oz	Max. winding temp.	125 °C
Free gas volume comp.	3,150 cm³ / 106.51fl.oz	Max. discharge temp.	140°C / 284°F
Motor protection	internal		

Compressor Dimensions

Housing


A Height	236.4mm / 9.31in
B Height	230.6mm / 9.08in
C Length shell	217mm / 8.54in
D Length w. cover	263.4mm / 10.37in
E Width	161.1mm / 6.34in

[Find 3D Model here](#)




Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 12.81–12.99 / 0.50–0.51in	øi 8.11–8.29 / 0.32–0.33in	øi 6.11–6.29 / 0.24–0.25in
Material	CU	CU	CU
Horizontal angle ±2°	37°	37°	37°
Vertical angle ±2°	36°	0°	36°
Position l/h/w [mm]	-110.5/211.8/56.7 / -4.35/8.34/2.23in	115.5/127/81 / 4.55/5.00/3.19in	109.5/94.3/72 / 4.31/3.71/2.83in
Straight tube l. [mm]	12 / 0.47in	12 / 0.47in	12 / 0.47in


Mounting Accessories

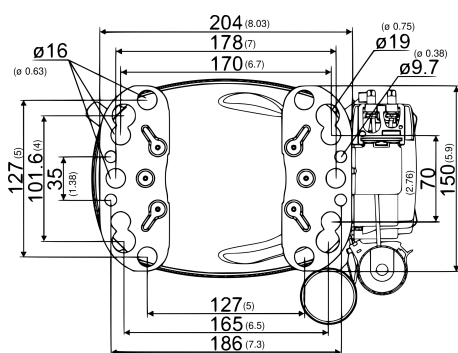

Bolt joint



Snap-on



Dimensions in mm [in]

	one comp.	multi pack
Bolt joint M6 ø16mm	118-1917	118-1918
Bolt joint ø1/4" ø16mm	118-1946	-
Bolt joint ø1/4" ø19mm	118-1949	-
Snap-on ø7,3 ø16mm	118-1947	118-1919

Model

SCE25LNDX

Configuration 1

Sales code:

104H8420

Configuration

Motor configuration	CSCR
Power supply (nominal)	220-240 V/50 Hz 1~
Refrigerant	R290
Application	LBP
Voltage range	198-254 V
Starting torque	HST
Approvals	VDE, CCC, CB
Starting device type	relay
Run capacitor	10 μ F
Start capacitor	60 μ F
LRA (locked rotor amps / 4s/ U(N))	22.1 A
RLA (rated load amps / 1s/ U(N))	3.7 A
Cut in current (U(N))	22.1 A

Ambient/ machine room temperatures minimum /maximum


Ambient temperature range: 10 - 43°C / 50 - 109°F

Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling

fan 3m/s

Electrical Accessories / Wiring Diagram

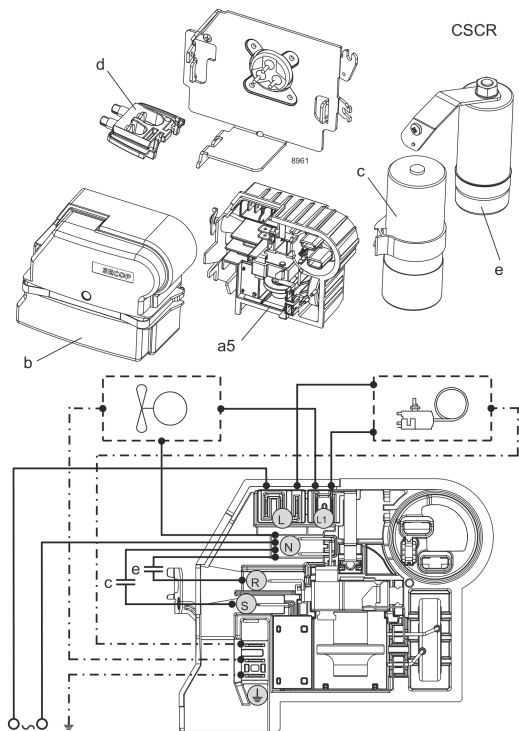

[View full size](#)

Components

a5 SC starter kit 117U8101

b cover terminal board + clamp 117U1036

c start capacitor (60 μ F) 117U5351



e run cap (10 μ F, 6.3mm,c.length 280mm) 117-7166

e1 retaining clamp 117-0313

screw M4x8mm 117-0301

d cord relief 103N1007

Operation Pressure Range

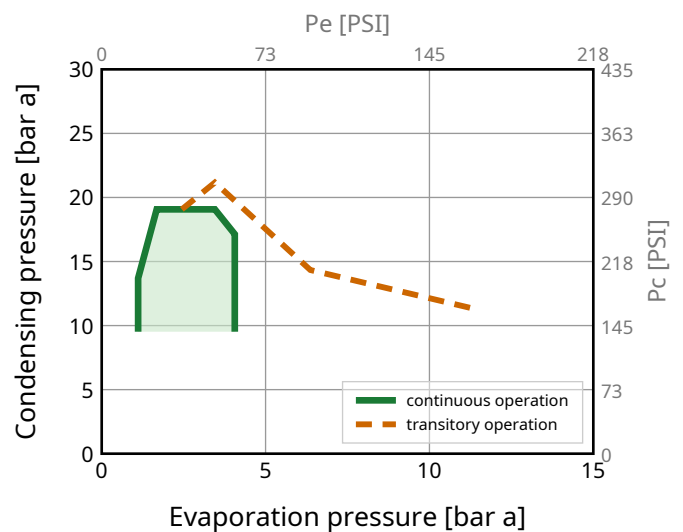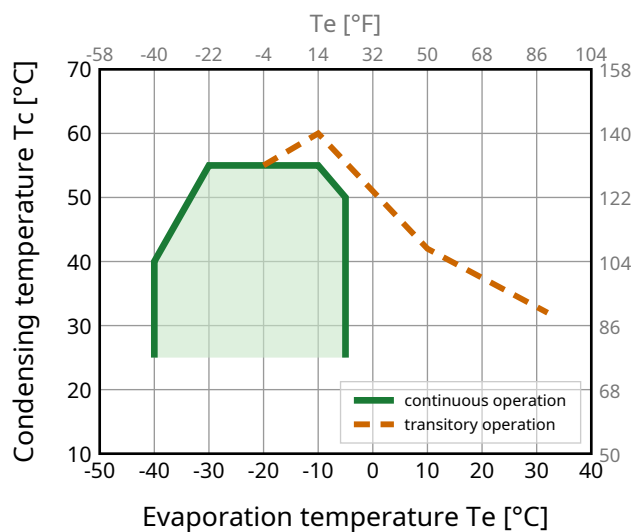

Model

SCE25LNDX

Configuration 1

Sales code:

104H8420

Standard Conditions

R290, 220 V/50 Hz, CSCR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	m	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	1182	4033	1017	1.62	5.54	728	3.56	12.01	ASHRAE LBP
-25 -13	55 131	32 89.6	55 131	881	3005	757	1.26	4.30	699	3.44	11.04	CECOMAF LBP
-35 -31	40 104	20 68	40 104	676	2308	582	1.26	4.30	537	2.75	7.76	EN12900 LBP
-23.3 -10	48.8 119.8	4.4 39.9	48.8 119.8	971	3313	835	1.37	4.67	709	3.48	13.48	ARI540 LBP
-23.3 -10	40.6 105.1	32.2 90	32.2 90	1313	4480	1129	1.91	6.53	686	3.38	13.34	AHAM LBP
-25 -13	45 113	32 89.6	45 113	1057	3608	909	1.56	5.33	676	3.34	11.98	opt LBP

Performance Tables

R290, 220 V/50 Hz, CSCR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	m
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-40	-40	470	1604	404	0.97	3.30	486	2.56	5.29
-35	-31	642	2191	552	1.18	4.02	546	2.79	7.24
-30	-22	837	2854	719	1.37	4.68	610	3.06	9.45
-25	-13	1057	3608	909	1.56	5.33	676	3.34	11.98
-20	-4	1307	4461	1124	1.76	6.00	744	3.63	14.87
-15	5	1590	5424	1367	1.97	6.70	809	3.92	18.16
-10	14	1908	6511	1641	2.19	7.48	871	4.20	21.91
-5	23	2266	7731	1949	2.44	8.34	927	4.45	26.17

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-40	-40	393	1342	338	0.84	2.85	470	2.48	4.88
-35	-31	529	1805	455	0.99	3.37	535	2.74	6.59
-30	-22	690	2356	594	1.13	3.85	612	3.06	8.62
-25	-13	881	3005	757	1.26	4.30	699	3.44	11.04
-20	-4	1103	3764	949	1.39	4.74	794	3.86	13.88
-15	5	1361	4643	1170	1.52	5.18	896	4.32	17.21
-10	14	1658	5655	1425	1.66	5.65	1001	4.80	21.08
-5	23	1996	6811	1717	1.80	6.15	1108	5.29	25.55