

Model

Designation	SCE25LNIX	220-240V/60Hz 1~	Sales code:	104H8440
-------------	------------------	-------------------------	-------------	-----------------

Compressor design

Oil type	Polyolester	Refrigerant(s)	R290, 0, 0
Oil viscosity	32cSt	Displacement	25cm ³ / 1,53cu.in
Oil quantity	500cm ³ / 16,9fl.oz	Compressors on pallet	48
Refr. charge - tech. limit	500g / 17,6oz		
Free gas volume comp.	3150cm ³ / 106,5fl.oz		
Weight	14,9kg / 32,8lbs		
Motor protection	1# internal		
Winding resistance main	2,4Ω (at 25°C)		
Winding resistance aux	8,9Ω (at 25°C)		
Max. winding temp.	125°C / 257°F		
Max. discharge temp.	140°C / 284°F		



General - Configurations with SCE25LNIX

Conf. 1

Motor configuration	CSCR
Power supply (nominal)	220-240V/60Hz
Number of phases	1
Voltage range	195-254V
Approvals	
Starting torque	HST
Note	Starter kit(relay), cover and cord relief are included and pre-assembled.

Applications with SCE25LNIX

Conf. 1

Refrigerant	R290
Application	LBP
System cooling	fan 3m/s
Hot gas defrost	OK
Long interval pull down	OK

Electrical data - Configurations with SCE25LNIX


Conf. 1

Starting device type	relay
Run capacitor	15μF
Start capacitor	80μF
LRA (locked rotor amps / 4s/ U(N))	30,2A
RLA (rated load amps / 1s/ U(N))	3,5A
Cut in current (U(N))	

Model			
Designation	SCE25LNIX	220-240V/60Hz 1~	Sales code: 104H8440

Compressor dimensions

Housing	A Height	236,4mm / 9,31in	
	B Height	230,6mm / 9,08in	
	C Length shell	217mm / 8,54in	
	D Length w. cover	263,4mm / 10,37in	
	E Width	161,1mm / 6,34in	
	F Width with equipment	199mm / 7,83in	
Connectors	Suction	Discharge	Process
	X	Y	Z
Diameter [mm]	øi 12,81-12,99	øi 8,11-8,29	øi 6,41-6,59
(i:inside, o:outside) [in]	øi 0,5-0,51	øi 0,32-0,33	øi 0,25-0,26
Material	steel/CU	copper	copper
Horizontal angle ±2°	37°	37°	37°
Vertical angle ±2°	36°	0°	36°
Position l/h/w [mm]	-111/212/57	116/127/81	110/94/72
	[in] -4,4/8,3/2,2	4,5/5/3,2	4,3/3,7/2,8
Straight tube l. [mm]	12	12	12
	[in] 0,5	0,5	0,5

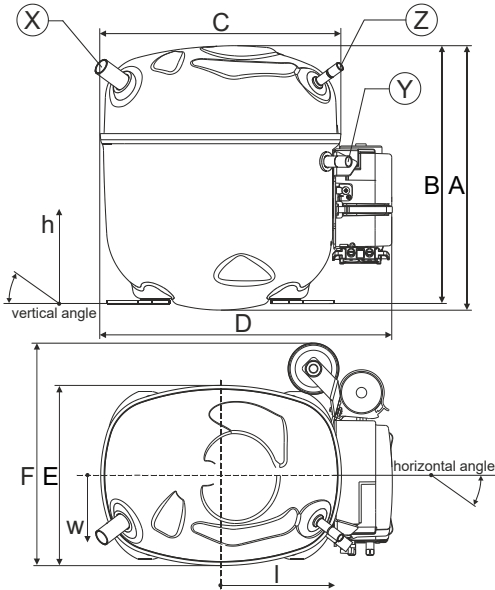

Compressor fixation

Baseplate	[mm]	[inch]
BI	204	8.03
Bw	150	5.9
øE	ø 9.7	ø 0.38

Large holes	[mm]	[inch]
LI	165	6.5
Lw	101.6	4
øL	ø 19	ø 0.75

Small holes	[mm]	[inch]
SI	170	6.7
Sw	70	2.76
øS	ø 16	ø 0.63
QI	127	5
Qw	127	5

Bolt joint

Snap-on

Mounting accessories

Bolt joint | M6 | ø16mm

one comp.

multi pack

Bolt joint | ø1/4" | ø16mm

118-1917

118-1918

Bolt joint | ø1/4" | ø19mm

118-1946

118-1949

Snap-on | ø7,3 | ø16mm

118-1947

118-1919

Application notes


Provision for PE Grounding is located at the PE Stamp on the compressor

Model					
Designation	SCE25LNIX	220-240V/60Hz	Conf. 1	Sales code:	104H8440

Configuration

Electrical accessories / wiring diagram


Motor configuration	CSCR
Power supply (nominal)	220-240V/60Hz 1~
Refrigerant	R290
Application	LBP
Voltage range	195-254V
Starting torque	HST
Approvals	

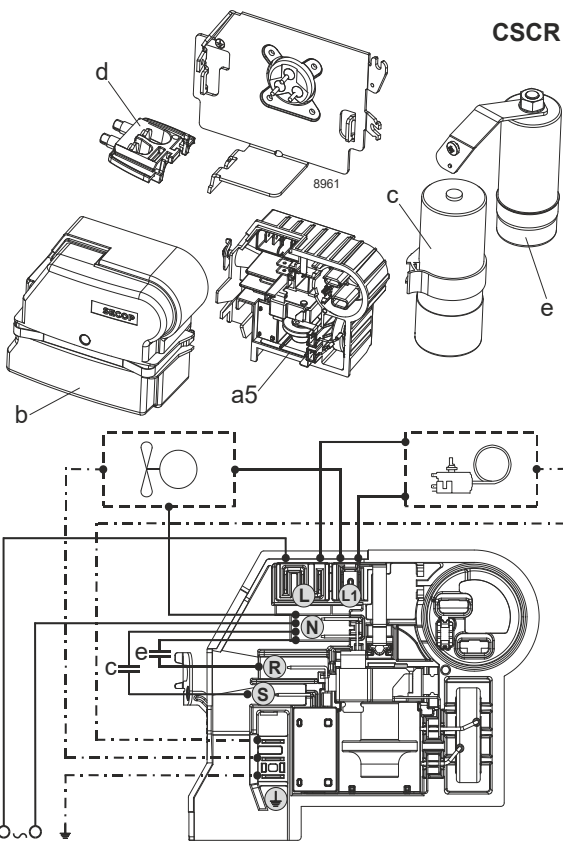

Ambient/ machine room temperatures minimum /maximum

Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	fan 3m/s

Operation pressure range

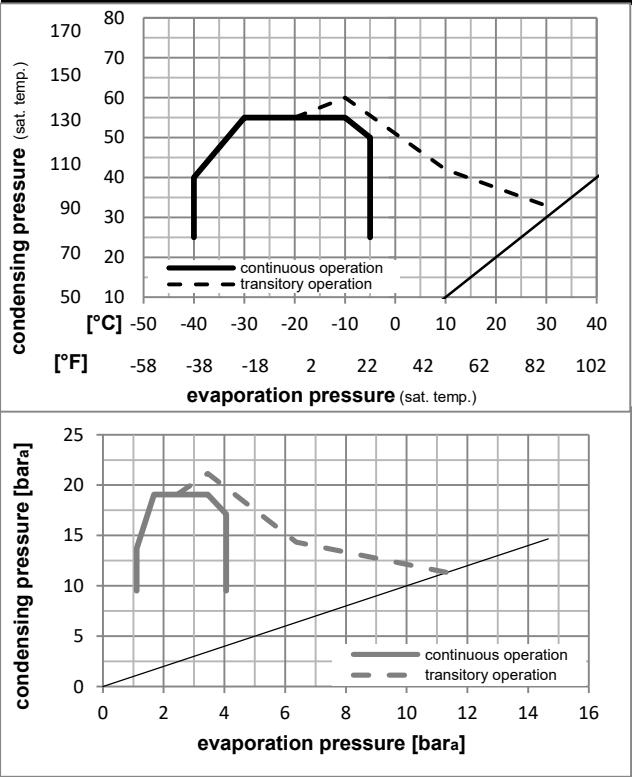

Components (Starter kit (a5)+cover (b) +cord relief (d): pre assembled)		
a5	SC starter kit	117U8102
b	cover terminal board + clamp	117U1036
c	start capacitor (80µF)	117U5352
e	run capacitor (15µF, 6.3mm)	117-7167
e1	retaining clamp	117-0313
	screw M4x8mm	117-0301
d	cord relief	103N1007

Model

Designation **SCE25LNIX** **220-240V/60Hz** Conf. 1 Sales code: **104H8440**

Optimization + standard conditions

R290, 230V/60Hz, CSCR, fan 3m/s,

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)						Power consumption			
Return gas temp.					Current consumption									
Liquid temp.					Ref. mass flow									
Cooling capacity					COP		EER		P1		I		m	
pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]		
[°C]	-23	54	32	32	1328,5	4537	1143,4	1,57	5,36	1,35	846,9	3,88	13,45	ASHRAE LBP
[°F]	-10	130	90	90										

[°C]	-25	55	32	55	987,6	3373	849,9	1,22	4,18	1,05	807,6	3,70	12,30	cecomaf LBP
[°F]	-13	131	90	131										

[°C]	-35	40	20	40	771,1	2634	663,6	1,29	4,39	1,11	599,7	2,75	8,81	EN12900 LBP
[°F]	-31	104	68	104										

[°C]	-23	49	4,4	49	1111,4	3796	956,5	1,34	4,59	1,16	827,1	3,78	15,39	ARI540 LBP
[°F]	-10	120	40	120										

[°C]	-23	41	32	32	1513,0	5167	1302,1	1,95	6,66	1,68	776,4	3,55	15,32	AHAM LBP
[°F]	-10	105	90	90										

[°C]	-35	45	32	45	718,0	2452	617,9	1,18	4,03	1,01	609,1	2,79	8,05	opt
[°F]	-31	113	90	113										

Performance tables

R290, 230V/60Hz, CSCR, fan 3m/s,

	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-40	-40	513,1	1752	441,5	0,96	3,29	0,83	533,3	2,45	5,74
cond. pressure	-35	-31	718,0	2452	617,9	1,18	4,03	1,01	609,1	2,79	8,05
pc= 45/113	-30	-22	953,5	3256	820,6	1,38	4,71	1,19	691,3	3,16	10,72
return gas temp.	-25	-13	1221,9	4173	1051,6	1,57	5,37	1,35	776,8	3,55	13,78
RGT= 32/90	-20	-4	1525,3	5209	1312,7	1,77	6,04	1,52	862,5	3,95	17,27
liquid temp	-15	5	1866,2	6373	1606,1	1,97	6,74	1,70	945,4	4,33	21,23
Tliq= 45/113	-5	23	2669,1	9116	2297,1	2,45	8,36	2,11	1090,4	5,00	30,73
[°C / °F]	-40	-40	389,0	1329	334,8	0,80	2,75	0,69	483,8	2,23	4,80
cond. pressure	-35	-31	555,9	1898	478,4	0,96	3,26	0,82	581,5	2,66	6,87
pc= 55/131	-30	-22	754,7	2577	649,5	1,09	3,73	0,94	690,5	3,16	9,36
return gas temp	-25	-13	987,6	3373	849,9	1,22	4,18	1,05	807,6	3,70	12,30
RGT= 32/90	-20	-4	1256,9	4292	1081,7	1,35	4,62	1,16	929,9	4,26	15,72
liquid temp	-15	5	1564,9	5344	1346,7	1,48	5,07	1,28	1054,2	4,84	19,67
Tliq= 55/131	-5	23	2305,9	7875	1984,5	1,78	6,07	1,53	1296,6	5,97	29,38