



**ASHRAE LBP\***

115V, 60Hz, fan cooling F<sub>2</sub>

Evap. temp. in °F	-49	-40	-30	-20	-13	-10	0	10	14	20	30	32	40	45	50	59	68
Capacity in BTU/h	457	672	959	1304	1585	1716	2205	2780	3037	3451	4226	5117	5213	5609			
Power cons. in W	191	229	271	313	343	356	401	448	468	499	555	616	622	649			
Current cons. in A	3.65	3.76	3.93	4.14	4.32	4.40	4.71	5.07	5.22	5.47	5.93	6.43	6.48	6.70			
EER in BTU/Wh	2.39	2.93	3.54	4.17	4.62	4.82	5.51	6.21	6.49	6.91	7.62	8.31	8.38	8.65			

**ASHRAE MBP**


115V, 60Hz, fan cooling F<sub>2</sub>

Evap. temp. in °F	-49	-40	-30	-20	-13	-10	0	10	14	20	30	32	40	45	50	59	68
Capacity in BTU/h	280	456	690	974	1207	1316	1727	2214	2433	2789	3460	4237	4321	4669			
Power cons. in W	176	221	270	318	353	368	419	472	494	529	590	656	663	691			
Current cons. in A	3.60	3.75	3.96	4.22	4.43	4.53	4.88	5.29	5.46	5.74	6.24	6.78	6.84	7.07			
EER in BTU/Wh	1.59	2.06	2.56	3.06	3.42	3.58	4.12	4.69	4.92	5.27	5.86	6.46	6.52	6.75			

**EN 12900 Household (CECOMAF)**

115V, 60Hz, fan cooling F<sub>2</sub>

Evap. temp. in °F	-49	-40	-30	-20	-13	-10	0	10	14	20	30	32	40	45	50	59	68
Capacity in BTU/h	379	565	813	1111	1353	1467	1888	2384	2604	2960	3626	4389	4471	4809			
Power cons. in W	189	229	271	314	345	358	404	452	473	504	561	623	629	656			
Current cons. in A	3.64	3.76	3.93	4.15	4.33	4.42	4.74	5.10	5.26	5.51	5.97	6.48	6.54	6.76			
EER in BTU/Wh	2.00	2.47	3.00	3.53	3.92	4.09	4.67	5.27	5.51	5.87	6.46	7.05	7.10	7.33			

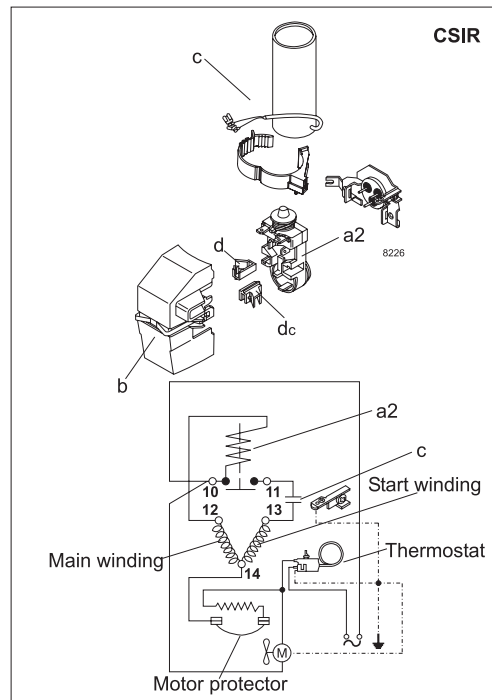

Accessories for	NF7CLX	Figure	Code number	Test conditions	ASHRAE LBP*	ASHRAE MBP	EN 12900/CECOMAF
Starting relay	1/4 in. spade connect.	a2	117U4129	Condensing temp.	110°F	130°F	113°F
Protector 3/4 in.	Texas Instruments		MRT22AFZ-6	Ambient temp.	90°F	95°F	90°F
Cover (standard)		b	117U1021	Suction gas temp.	90°F	95°F	90°F
Cord relief		d	117U0349	Liquid temperature	90°F	115°F	113°F
Cord relief for capacitor		dc	117U0349				
Start. capacitor 320 µF	1/4 in. spade connect.	c	117U5022				
<b>Mounting accessories</b>					<b>Code number</b>		
Bolt joint for one comp.					Ø: 5/8 in.	118-1917	
Bolt joint in quantities					Ø: 5/8 in.	118-1918	
Snap-on in quantities					Ø: 5/8 in.	118-1919	

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. [www.secop.com](http://www.secop.com)