

SC18MFX Standard Compressor R134a 220-240V 50Hz & 208-230V 60Hz

General

Code number	104G8804
Approvals	EN 60335-2-34, CCC
Compressors on pallet	80

Application

Application	MBP			
	Hz	50	60	
Frequency	Hz	50	60	
Evaporating temperature	°C	-20 to 10	-20 to 7.2	
Voltage range	V	187 - 254	187 - 254	
Max. condensing temperature continuous (short)	°C	60 (70)	60 (70)	
Max. winding temperature continuous (short)	°C	125 (135)	125 (135)	

Cooling requirements

Frequency	Hz	50			60		
		LBP	MBP	HBP	LBP	MBP	HBP
32°C		-	F ₂	-	-	F ₂	-
38°C		-	F ₂	-	-	F ₂	-
43°C		-	F ₂	-	-	F ₂	-
Remarks on application: 60Hz CSR only							

Motor


Motor type	CSIR/CSR		
LRA (rated after 4 sec. UL984), HST LST	A	18.6	-
Cut in Current, HST LST	A	18.6	-
Resistance, main start winding (25°C)	Ω	3.8	13.7

Design


Displacement	cm ³	17.69
Oil quantity (type)	cm ³	600 (polyolester)
Maximum refrigerant charge	g	1300
Free gas volume in compressor	cm ³	1460
Weight without electrical equipment	kg	13.8

Dimensions

Height	mm	A	219
		B	213
		B1	193
		B2	110
Suction connector	location/I.D. mm angle	C	10.2 37°
	material comment	Copper Rubber plug	
Process connector	location/I.D. mm angle	D	6.2 37°
	material comment	Copper Rubber plug	
Discharge connector	location/I.D. mm angle	E	6.2 37°
	material comment	Copper Rubber plug	
Oil cooler connector	location/I.D. mm angle	F	-
	material comment	-	
Connector tolerance	I.D. mm		±0.09
Remarks:			

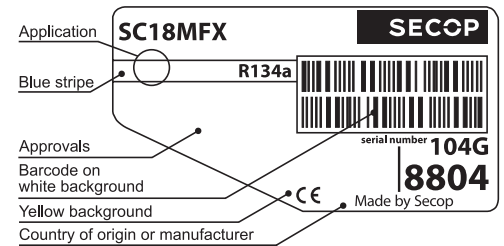

- S = Static cooling normally sufficient
- O = Oil cooling
- F₁ = Fan cooling 1.5 m/s
(compressor compartment temperature equal to ambient temperature)
- F₂ = Fan cooling 3.0 m/s necessary
- SG = Suction gas cooling normally sufficient
- = not applicable in this area

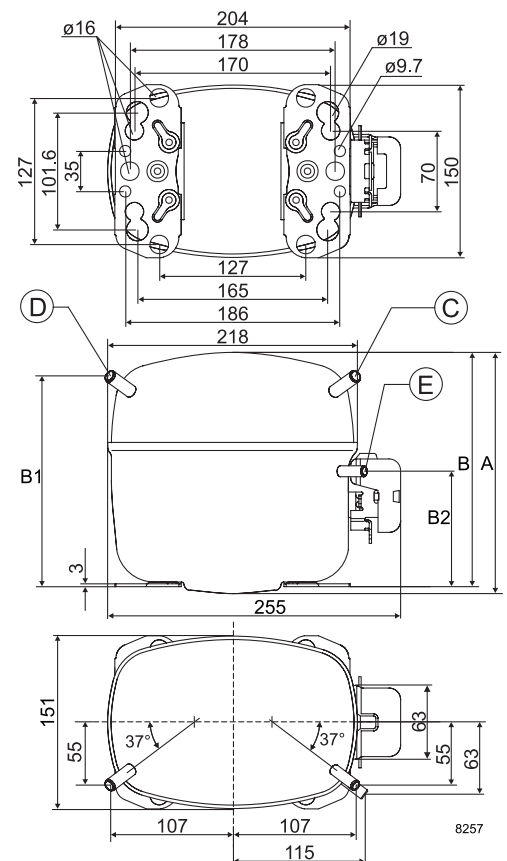

EN 12900 Household (CECOMAF) 220V, 50Hz (CSIR), fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W							424	553	709	828	894	1113	1370	1496	1670		
Power cons. in W							414	470	527	565	585	644	705	733	768		
Current cons. in A							3.04	3.23	3.43	3.57	3.64	3.86	4.09	4.19	4.32		
COP in W/W							1.02	1.18	1.34	1.46	1.53	1.73	1.94	2.04	2.17		

EN 12900 Household (CECOMAF) 220V, 50Hz (CSR), RC 10µF, fan cooling F₂



Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W							430	563	722	845	912	1137	1400	1529	1706		
Power cons. in W							400	455	507	541	558	607	657	679	707		
Current cons. in A							2.26	2.46	2.67	2.81	2.89	3.11	3.34	3.45	3.58		
COP in W/W							1.08	1.24	1.42	1.56	1.64	1.87	2.13	2.25	2.41		

ASHRAE MBP 220V, 50Hz (CSIR), fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W							502	657	843	988	1067	1335	1647	1784	1965		
Power cons. in W							413	469	525	563	582	641	701	729	764		
Current cons. in A							3.03	3.23	3.43	3.56	3.63	3.85	4.07	4.18	4.31		
COP in W/W							1.22	1.40	1.61	1.75	1.83	2.08	2.35	2.45	2.57		

ASHRAE MBP 220V, 50Hz (CSR), RC 10µF, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W							510	669	860	1008	1090	1363	1683	1823	2008		
Power cons. in W							400	454	506	539	556	605	654	676	704		
Current cons. in A							2.25	2.45	2.66	2.81	2.88	3.10	3.33	3.43	3.57		
COP in W/W							1.28	1.47	1.70	1.87	1.96	2.25	2.57	2.70	2.85		

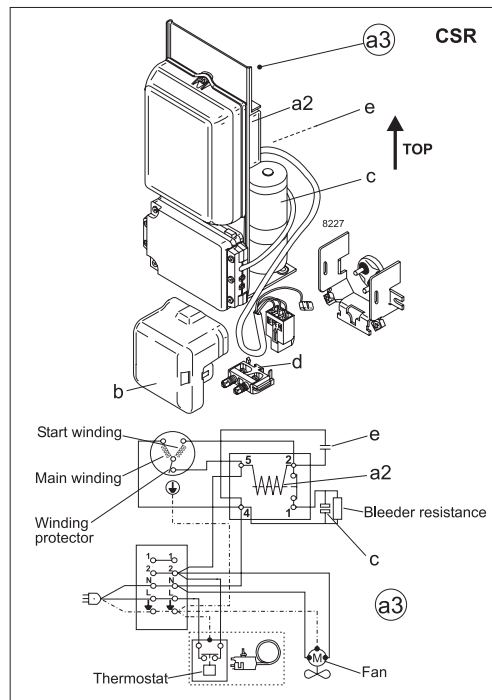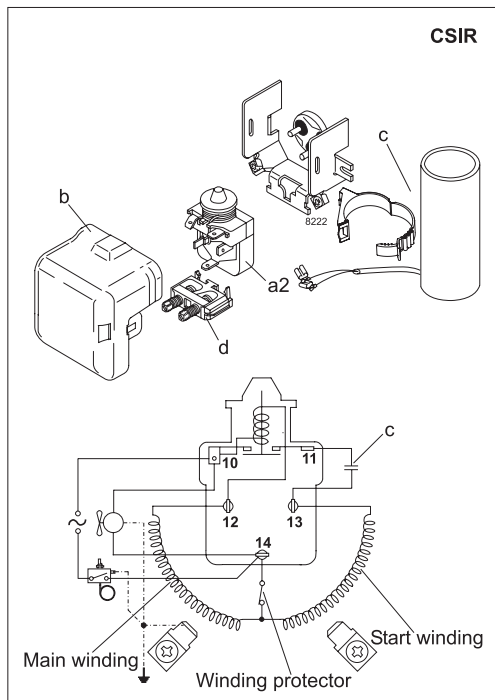

Accessories for	SC18MFX (50Hz)	Figure	Code number
Starting device	550 mm cable length	a3	117-7027
	1000 mm cable length		117-7040
Starting relay		a2	Components of starting device
Start. capacitor 80 µF		c	
Run capacitor 10 µF		e	
Starting relay	6.3 mm spade connectors	a2	117U6019
Start. capacitor 80 µF	6.3 mm spade connectors	c	117U5017
Cover		b	103N2008
Cord relief		d	103N1004

Test conditions	EN 12900/CECOMAF	ASHRAE MBP
Condensing temperature	55°C	54.4°C
Ambient temperature	32°C	35°C
Suction gas temperature	32°C	35°C
Liquid temperature	no subcooling	46.1°C


Mounting accessories	Code number	
Bolt joint for one comp.	Ø: 16 mm	118-1917
Bolt joint in quantities	Ø: 16 mm	118-1918
Snap-on in quantities	Ø: 16 mm	118-1919

EN 12900 Household (CECOMAF) 220V, 60Hz (CSR), RC 10µF, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W							514	668	851	991	1067	1322	1621	1767			
Power cons. in W							460	520	585	630	653	724	798	831			
Current cons. in A							2.06	2.34	2.63	2.83	2.93	3.25	3.58	3.73			
COP in W/W							1.12	1.28	1.45	1.57	1.63	1.83	2.03	2.13			

ASHRAE MBP 220V, 60Hz (CSR), RC 10µF, fan cooling F₂

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10	15	20
Capacity in W							609	793	1012	1182	1274	1586	1948	2106			
Power cons. in W							459	519	583	628	651	721	795	828			
Current cons. in A							2.05	2.33	2.62	2.82	2.92	3.24	3.57	3.72			
COP in W/W							1.33	1.53	1.73	1.88	1.96	2.20	2.45	2.54			

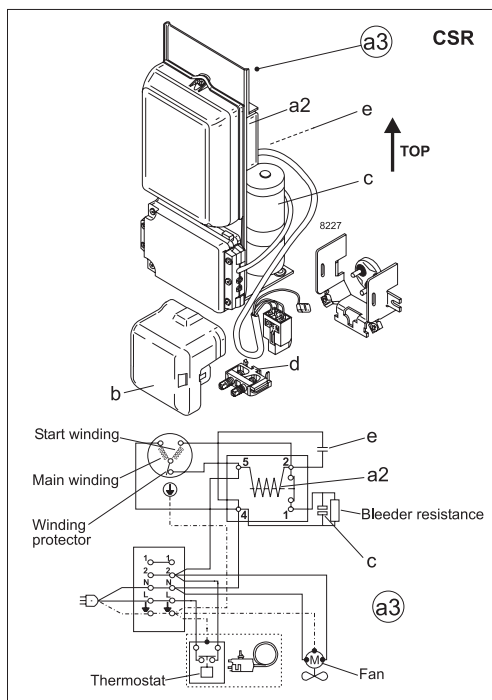

Accessories for	SC18MFX (60Hz)	Figure	Code number
Starting device	550 mm cable length	a3	117-7027
	1000 mm cable length		117-7040
Starting relay		a2	Components of starting device
Start. capacitor 80 µF		c	
Run capacitor 10 µF		e	
Cover		b	
Cord relief		d	103N1004

Test conditions	EN 12900/CECOMAF	ASHRAE MBP
Condensing temperature	55°C	54.4°C
Ambient temperature	32°C	35°C
Suction gas temperature	32°C	35°C
Liquid temperature	no subcooling	46.1°C

Mounting accessories	Code number	
Bolt joint for one comp.	Ø: 16 mm	118-1917
Bolt joint in quantities	Ø: 16 mm	118-1918
Snap-on in quantities	Ø: 16 mm	118-1919

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com