

NTY5.5FK

High Energy-optimized Compressor

R134a

115V 60Hz

SECOP

General

Code number	105G5620
Approvals	UL984
Compressors on pallet	80

Application

Application	LBP			
Frequency	Hz	50	60	
Evaporating temperature	°F	–	-31 to 14	
Voltage range	V	–	103 - 127	
Max. condensing temperature continuous (short)	°F	–	140 (158)	
Max. winding temperature continuous (short)	°F	–	257 (275)	

Cooling requirements

Frequency	Hz	50			60		
Application		LBP	MBP	HBP	LBP	MBP	HBP
90°F		–	–	–	S	–	–
100°F		–	–	–	S	–	–
110°F		–	–	–	S	–	–
Remarks on application: Below 10°F only for 115V 60Hz nominal.							

Motor



Motor type	RSCR		
LRA (rated after 4 sec. UL984), HST LST	A	–	10.5
Cut in Current, HST LST	A	–	20.4
Resistance, main start winding (77°F)	Ω	3.1	4.0

Design


Displacement	cu.in	0.37
Oil quantity (type)	fl.oz.	9.9 (polyolester)
Maximum refrigerant charge	oz.	14.0
Free gas volume in compressor	fl.oz.	79.7
Weight without electrical equipment	lbs.	23.8

Dimensions

Height	inch	A	8.00
		B	7.76
		B1	–
		B2	–
Suction connector	location, I.D. in. angle	C	0.320-0.327 15°
	material comment		Cu-plated steel Rubber plug
Process connector	location, I.D. in. angle	D	0.252-0.259 25°
	material comment		Cu-plated steel Rubber plug
Discharge connector	location, I.D. in. angle	E	0.252-0.259 35°
	material comment		Cu-plated steel Rubber plug
Oil cooler connector	location, I.D. in. angle	F	–
	material comment		–
Remarks:			

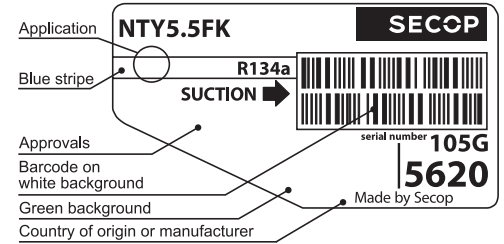

- S = Static cooling normally sufficient
- O = Oil cooling
- F₁ = Fan cooling 1.5 m/s (compressor compartment temperature equal to ambient temperature)
- F₂ = Fan cooling 3.0 m/s necessary
- SG = Suction gas cooling normally sufficient
- = not applicable in this area

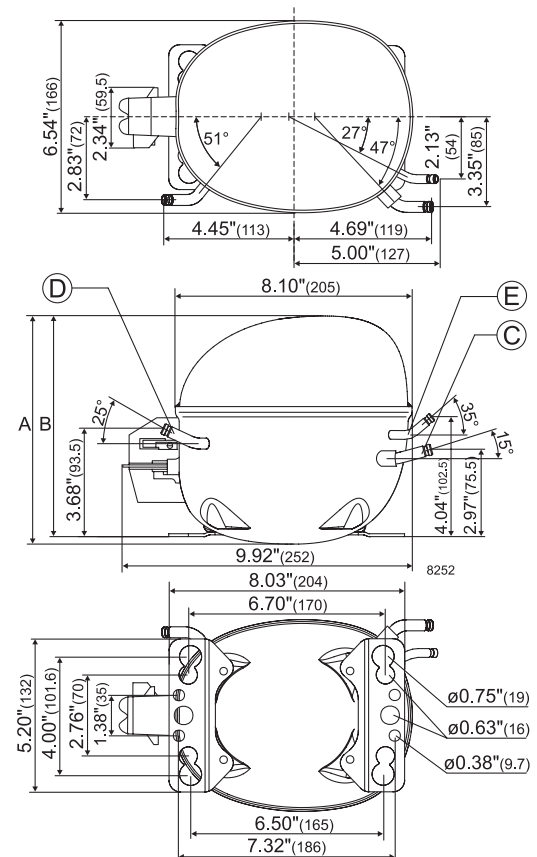

Static cooling, with RC 15μF, 115V 60Hz, PTC consumption incl.

EN 12900 Household (CECOMAF) Static cooling, with RC 15μF, 115V 60Hz, PTC consumption incl.

November 2011