


XVL8.0KX Variable Speed Drive Compressor R600a 220-240V 50/60Hz



General

Code number	108H7730
Electronic unit (attached, PFC) - XVL-AEO/Freq. Inputs: Modbus, thermostat, frequency signal	105N5324, 50 pcs: 105N5325
Approvals	EN 60335-2-34 w. Annex AA (VDE), GB 4706.17 (CCC/CQC)
Compressors on pallet	175
Remarks: In AEO (Adaptive Energy Optimizing) speed mode the XVL compressor will always adapt its speed to the actual cooling demand. PFC = power factor correction according to EN 61000-3-2:2014	

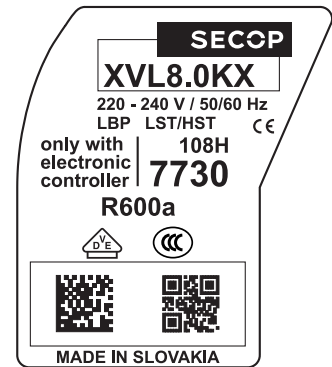

yellow warning label is placed separately



Application

Application	LBP		
Frequency	Hz	50	60
Evaporating temperature	°C	-35 to 0 (-5/-10)	-35 to 0 (-5/-10)
Voltage range	V	160 - 264	160 - 264
Max. condensing temperature continuous (short)	°C	60 (70)	60 (70)
Max. winding temperature continuous (short)	°C	125 (135)	125 (135)

Cooling requirements

Frequency	Hz	50			60		
Application		LBP	MBP	HBP	LBP	MBP	HBP
32°C		S	-	-	S	-	-
38°C		S	-	-	S	-	-
43°C		S	-	-	S	-	-

Remarks: HST capable (High starting torque, start against differential pressure)
All measured performance data include losses caused by electronic unit.

Features

Speed range	rpm	1000 - 4000
Protections		current / speed / temperature
External speed control		frequency signal 5V, 0-200Hz

Motor

Motor type		permanent magnet
LRA (rated after 4 sec. UL984)	A	electronic cut off
Maximum current	A	2.5
Resistance, all 3 windings (25°C)	Ω	20.0

Design

Displacement	cm ³	7.7
Oil quantity (type)	cm ³	115 (5 cSt mineral)
Maximum refrigerant charge	g	150
Free gas volume in compressor	cm ³	900
Weight	kg	4.9


Dimensions

Height	mm	A	106
		B	100
Suction connector	location/I.D. mm angle	C	6.2 15°
	material comment		Cu-plated steel Rubber plug
Process connector	location/O.D. mm angle	D	6.0 7°
	material comment		Copper Rubber plug
Discharge connector	location/O.D. mm angle	E	3.2 30°
	material comment		Cu-plated steel Rubber plug
Oil cooler connector	location/I.D. mm angle	F	-
	material comment		-
Connector tolerance	mm		6.2 ±0.1, 6.0 ±0.1, 3.2 ±0.05

Dimensions

		Code number
Bolt joint for one compressor	Ø: 16 mm	118-1917
Bolt joint in quantities	Ø: 16 mm	118-1918
Snap-on in quantities	Ø: 16 mm	118-1919

- S = Static cooling normally sufficient
- O = Oil cooling
- F₁ = Fan cooling 1.5 m/s
(compressor compartment temperature equal to ambient temperature)
- F₂ = Fan cooling 3.0 m/s necessary
- SG = Suction gas cooling normally sufficient
- = not applicable in this area

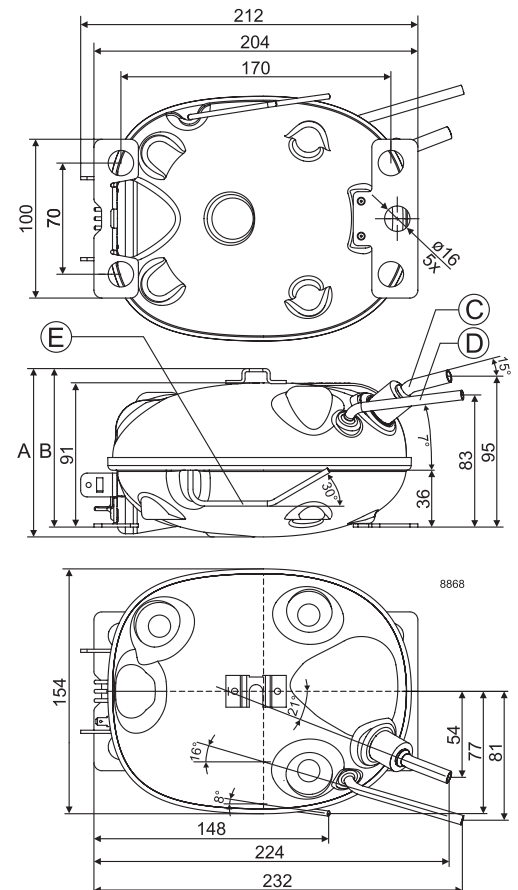

1000 rpm 220V, 50/60Hz, static cooling, pcond = 35°C, Tsuc = 32°C, Tliq = 35°C

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10
Capacity in W			31.9	39.3	49.1	53.1	61.8	77.5	96.5	111	119	145			
Power cons. in W			18	21.1	24.4	25.5	27.7	31	34.1	36	36.9	39.3			
Current cons. in A			0.14	0.16	0.18	0.18	0.20	0.22	0.24	0.25	0.25	0.27			
COP in W/W			1.78	1.86	2.02	2.08	2.23	2.50	2.83	3.08	3.22	3.69			

1200 rpm 220V, 50/60Hz, static cooling, pcond = 35°C, Tsuc = 32°C, Tliq = 35°C

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10
Capacity in W			37.9	46.6	58.4	63.1	73.4	92.1	115	132	141	172			
Power cons. in W			20.6	24.2	28	29.3	31.8	35.6	39.2	41.3	42.4	45.1			
Current cons. in A			0.16	0.18	0.20	0.21	0.23	0.25	0.27	0.29	0.29	0.31			
COP in W/W			1.84	1.93	2.09	2.16	2.31	2.59	2.92	3.19	3.33	3.82			

1300 rpm 220V, 50/60Hz, static cooling, pcond = 35°C, Tsuc = 32°C, Tliq = 35°C

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10
Capacity in W			40.9	50.3	63	68.1	79.2	99.3	124	142	152	186			
Power cons. in W			21.9	25.7	29.8	31.2	33.9	37.9	41.7	44	45.1	48			
Current cons. in A			0.17	0.19	0.22	0.22	0.24	0.27	0.29	0.30	0.31	0.33			
COP in W/W			1.87	1.96	2.12	2.19	2.34	2.62	2.97	3.23	3.38	3.88			

1500 rpm 220V, 50/60Hz, static cooling, pcond = 35°C, Tsuc = 32°C, Tliq = 35°C

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10
Capacity in W			46.9	57.7	72.2	78.1	90.8	114	142	163	175	213			
Power cons. in W			24.6	28.8	33.4	34.9	38	42.5	46.7	49.3	50.6	53.8			
Current cons. in A			0.19	0.21	0.24	0.25	0.27	0.30	0.32	0.34	0.35	0.37			
COP in W/W			1.91	2.00	2.17	2.24	2.39	2.68	3.03	3.30	3.46	3.96			

1800 rpm 220V, 50/60Hz, static cooling, pcond = 35°C, Tsuc = 32°C, Tliq = 35°C

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10
Capacity in W			55.3	68	85.1	92	107	134	167	192	206	251			
Power cons. in W			29	34	39.3	41.2	44.8	50.1	55.1	58.1	59.6	63.4			
Current cons. in A			0.22	0.25	0.28	0.30	0.32	0.35	0.38	0.40	0.41	0.43			
COP in W/W			1.91	2.00	2.16	2.24	2.39	2.68	3.03	3.30	3.46	3.96			

2100 rpm 220V, 50/60Hz, static cooling, pcond = 35°C, Tsuc = 32°C, Tliq = 35°C

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10
Capacity in W			63.6	78.3	98	106	123	155	192	221	237	289			
Power cons. in W			33.4	39.2	45.3	47.4	51.5	57.7	63.4	67	68.6	73			
Current cons. in A			0.25	0.29	0.33	0.34	0.37	0.40	0.44	0.46	0.47	0.50			
COP in W/W			1.91	2.00	2.16	2.24	2.39	2.68	3.03	3.3	3.45	3.96			

2500 rpm 220V, 50/60Hz, static cooling, pcond = 35°C, Tsuc = 32°C, Tliq = 35°C

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10
Capacity in W			74.8	92	115	125	145	182	226	260	279				
Power cons. in W			39.2	46	53.3	55.7	60.6	67.8	74.6	78.7	80.7				
Current cons. in A			0.30	0.34	0.39	0.40	0.43	0.48	0.52	0.54	0.56				
COP in W/W			1.91	2.00	2.16	2.23	2.39	2.68	3.03	3.30	3.45				

3000 rpm 220V, 50/60Hz, static cooling, pcond = 35°C, Tsuc = 32°C, Tliq = 35°C

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10
Capacity in W			86.6	107	133	144	168	210	262	301	323				
Power cons. in W			46.2	54.2	62.7	65.6	71.3	79.8	87.8	92.7	95				
Current cons. in A			0.35	0.40	0.45	0.47	0.51	0.56	0.61	0.64	0.65				
COP in W/W			1.88	1.97	2.13	2.2	2.35	2.64	2.98	3.25	3.40				

3500 rpm 220V, 50/60Hz, static cooling, pcond = 35°C, Tsuc = 32°C, Tliq = 35°C

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10
Capacity in W			98.5	121	152	164	191	239	298	342	367				
Power cons. in W			53.1	62.3	72.1	75.5	82.1	91.8	101	107	109				
Current cons. in A			0.40	0.46	0.52	0.54	0.58	0.64	0.70	0.74	0.75				
COP in W/W			1.85	1.94	2.10	2.17	2.32	2.60	2.95	3.21	3.36				

4000 rpm 220V, 50/60Hz, static cooling, pcond = 35°C, Tsuc = 32°C, Tliq = 35°C

Evap. temp. in °C	-45	-40	-35	-30	-25	-23.3	-20	-15	-10	-6.7	-5	0	5	7.2	10
Capacity in W			110	136	170	184	214	268	333						
Power cons. in W			60.1	70.5	81.6	85.4	92.8	104	114						
Current cons. in A			0.46	0.52	0.59	0.61	0.66	0.73	0.79						
COP in W/W			1.84	1.92	2.08	2.15	2.3	2.58	2.92						

1000 rpm

220V, 50/60Hz, static cooling, pcond = 95°F, Tsuc = 90°F, Tliq = 95°F

Evap. temp. in °F	-49	-40	-31	-22	-13	-10	-4	5	14	20	23	32	41	45	50
Capacity in BTU/h			109	134	168	181	211	264	329	378	406	495			
Power cons. in W			18	21.1	24.4	25.5	27.7	31	34.1	36	36.9	39.3			
Current cons. in A			0.14	0.16	0.18	0.18	0.20	0.22	0.24	0.25	0.25	0.27			
EER in BTU/Wh			6.07	6.36	6.88	7.10	7.60	8.52	9.64	10.5	11.0	12.6			

1200 rpm

220V, 50/60Hz, static cooling, pcond = 95°F, Tsuc = 90°F, Tliq = 95°F

Evap. temp. in °F	-49	-40	-31	-22	-13	-10	-4	5	14	20	23	32	41	45	50
Capacity in BTU/h			129	159	199	215	251	314	391	449	482	588			
Power cons. in W			20.6	24.2	28	29.3	31.8	35.6	39.2	41.3	42.4	45.1			
Current cons. in A			0.16	0.18	0.20	0.21	0.23	0.25	0.27	0.29	0.29	0.31			
EER in BTU/Wh			6.28	6.58	7.12	7.35	7.87	8.82	9.98	10.9	11.4	13.0			

1300 rpm

220V, 50/60Hz, static cooling, pcond = 95°F, Tsuc = 90°F, Tliq = 95°F

Evap. temp. in °F	-49	-40	-31	-22	-13	-10	-4	5	14	20	23	32	41	45	50
Capacity in BTU/h			140	172	215	232	270	339	422	485	520	635			
Power cons. in W			21.9	25.7	29.8	31.2	33.9	37.9	41.7	44	45.1	48			
Current cons. in A			0.17	0.19	0.22	0.22	0.24	0.27	0.29	0.30	0.31	0.33			
EER in BTU/Wh			6.37	6.67	7.22	7.46	7.98	8.94	10.1	11.0	11.5	13.2			

1500 rpm

220V, 50/60Hz, static cooling, pcond = 95°F, Tsuc = 90°F, Tliq = 95°F

Evap. temp. in °F	-49	-40	-31	-22	-13	-10	-4	5	14	20	23	32	41	45	50
Capacity in BTU/h			160	197	246	266	310	389	484	556	596	728			
Power cons. in W			24.6	28.8	33.4	34.9	38	42.5	46.7	49.3	50.6	53.8			
Current cons. in A			0.19	0.21	0.24	0.25	0.27	0.30	0.32	0.34	0.35	0.37			
EER in BTU/Wh			6.51	6.83	7.39	7.63	8.17	9.15	10.4	11.3	11.8	13.5			

1800 rpm

220V, 50/60Hz, static cooling, pcond = 95°F, Tsuc = 90°F, Tliq = 95°F

Evap. temp. in °F	-49	-40	-31	-22	-13	-10	-4	5	14	20	23	32	41	45	50
Capacity in BTU/h			189	232	290	314	365	458	570	655	703	857			
Power cons. in W			29	34	39.3	41.2	44.8	50.1	55.1	58.1	59.6	63.4			
Current cons. in A			0.22	0.25	0.28	0.30	0.32	0.35	0.38	0.40	0.41	0.43			
EER in BTU/Wh			6.51	6.82	7.39	7.63	8.16	9.15	10.4	11.3	11.8	13.5			

2100 rpm

220V, 50/60Hz, static cooling, pcond = 95°F, Tsuc = 90°F, Tliq = 95°F

Evap. temp. in °F	-49	-40	-31	-22	-13	-10	-4	5	14	20	23	32	41	45	50
Capacity in BTU/h			217	267	334	362	421	527	656	754	809	987			
Power cons. in W			33.4	39.2	45.3	47.4	51.5	57.7	63.4	67	68.6	73			
Current cons. in A			0.25	0.29	0.33	0.34	0.37	0.40	0.44	0.46	0.47	0.50			
EER in BTU/Wh			6.51	6.82	7.38	7.62	8.16	9.15	10.3	11.3	11.8	13.5			

2500 rpm

220V, 50/60Hz, static cooling, pcond = 95°F, Tsuc = 90°F, Tliq = 95°F

Evap. temp. in °F	-49	-40	-31	-22	-13	-10	-4	5	14	20	23	32	41	45	50
Capacity in BTU/h			255	314	393	425	494	620	771	887	951				
Power cons. in W			39.2	46	53.3	55.7	60.6	67.8	74.6	78.7	80.7				
Current cons. in A			0.30	0.34	0.39	0.40	0.43	0.48	0.52	0.54	0.56				
EER in BTU/Wh			6.51	6.82	7.38	7.62	8.16	9.14	10.3	11.3	11.8				

3000 rpm

220V, 50/60Hz, static cooling, pcond = 95°F, Tsuc = 90°F, Tliq = 95°F

Evap. temp. in °F	-49	-40	-31	-22	-13	-10	-4	5	14	20	23	32	41	45	50
Capacity in BTU/h			296	364	455	492	573	718	893	1027	1101				
Power cons. in W			46.2	54.2	62.7	65.6	71.3	79.8	87.8	92.7	95				
Current cons. in A			0.35	0.40	0.45	0.47	0.51	0.56	0.61	0.64	0.65				
EER in BTU/Wh			6.40	6.71	7.26	7.5	8.03	8.99	10.2	11.1	11.6				

3500 rpm

220V, 50/60Hz, static cooling, pcond = 95°F, Tsuc = 90°F, Tliq = 95°F

Evap. temp. in °F	-49	-40	-31	-22	-13	-10	-4	5	14	20	23	32	41	45	50
Capacity in BTU/h			336	413	517	559	651	816	1015	1167	1252				
Power cons. in W			53.1	62.3	72.1	75.5	82.1	91.8	101	107	109				
Current cons. in A			0.40	0.46	0.52	0.54	0.58	0.64	0.70	0.74	0.75				
EER in BTU/Wh			6.32	6.63	7.17	7.41	7.93	8.89	10.1	11.0	11.5				

4000 rpm

220V, 50/60Hz, static cooling, pcond = 95°F, Tsuc = 90°F, Tliq = 95°F

Evap. temp. in °F	-49	-40	-31	-22	-13	-10	-4	5	14	20	23	32	41	45	50
Capacity in BTU/h			376	463	580	626	729	914	1137						
Power cons. in W			60.1	70.5	81.6	85.4	92.8	104	114						
Current cons. in A			0.46	0.52	0.59	0.61	0.66	0.73	0.79						
EER in BTU/Wh			6.26	6.57	7.11	7.34	7.85	8.80	9.96						

CECOMAF LBP

220V, 50/60Hz, static cooling

p evap = -25°C = -13°F T suc = 32°C = 90°F
 p cond = 55°C = 131°F T liq = 55°C = 131°F

Speed [rpm]	1000	1100	1300	1500	1800	2100	2500	3000	3500	4000
Capacity [W]	34.4	37.6	44.1	50.5	59.5	68.6	80.6	93.3	106.1	118.8
Power consumption [W]	26.5	28.5	32.4	36.3	42.8	49.3	58.0	68.3	78.5	88.8
Current consumption [A]	0.19	0.20	0.23	0.26	0.31	0.35	0.42	0.49	0.56	0.64
COP [W/W]	1.30	1.32	1.36	1.39	1.39	1.39	1.39	1.37	1.35	1.34
Capacity [BTU/h]	117	128	150	172	203	234	275	318	362	405
EER [BTU/Wh]	4.42	4.50	4.64	4.74	4.74	4.74	4.74	4.66	4.61	4.56

ASHRAE LBP

220V, 50/60Hz, static cooling

p evap = -23.3°C = -10°F T suc = 32.2°C = 90°F
 p cond = 54.4°C = 130°F T liq = 32.2°C = 90°F

Speed [rpm]	1000	1100	1300	1500	1800	2100	2500	3000	3500	4000
Capacity [W]	46.4	50.8	59.5	68.2	80.4	92.6	108.8	126.0	143.2	160.4
Power consumption [W]	28.2	30.3	34.5	38.6	45.6	52.5	61.7	72.6	83.6	94.5
Current consumption [A]	0.20	0.22	0.25	0.28	0.33	0.38	0.44	0.52	0.60	0.68
COP [W/W]	1.64	1.67	1.73	1.77	1.76	1.76	1.76	1.74	1.71	1.70
Capacity [BTU/h]	158	173	203	233	274	316	371	430	489	547
EER [BTU/Wh]	5.61	5.71	5.89	6.02	6.02	6.02	6.02	5.92	5.85	5.79

Optimization point

220V, 50/60Hz, static cooling

p evap = -25°C = -13°F T suc = 32°C = 90°F
 p cond = 35°C = 95°F T liq = 35°C = 95°F


Speed [rpm]	1000	1100	1300	1500	1800	2100	2500	3000	3500	4000
Capacity [W]	49.1	53.8	63.0	72.2	85.1	98.0	115.2	133.4	151.6	169.8
Power consumption [W]	24.4	26.2	29.8	33.4	39.3	45.3	53.3	62.7	72.1	81.6
Current consumption [A]	0.18	0.19	0.22	0.24	0.28	0.33	0.39	0.45	0.52	0.59
COP [W/W]	2.02	2.05	2.12	2.17	2.16	2.16	2.16	2.13	2.10	2.08
Capacity [BTU/h]	168	183	215	246	290	334	393	455	517	580
EER [BTU/Wh]	6.88	7.01	7.22	7.39	7.39	7.38	7.38	7.26	7.17	7.11

Optimization point

220V, 50/60Hz, static cooling

p evap = -10°C = 14°F T suc = 32°C = 90°F
 p cond = 45°C = 113°F T liq = 45°C = 113°F

Speed [rpm]	1000	1100	1300	1500	1800	2100	2500	3000	3500	4000
Capacity [W]	84.9	92.9	108.8	124.8	147.0	169.3	199.0	230.5	261.9	293.4
Power consumption [W]	38.9	41.8	47.5	53.2	62.8	72.3	85.0	100.0	115.1	130.2
Current consumption [A]	0.27	0.29	0.33	0.37	0.43	0.50	0.59	0.69	0.80	0.90
COP [W/W]	2.18	2.22	2.29	2.34	2.34	2.34	2.34	2.30	2.28	2.25
Capacity [BTU/h]	290	317	371	426	502	578	679	786	894	1001
EER [BTU/Wh]	7.45	7.59	7.82	8.00	7.99	7.99	7.99	7.86	7.76	7.69

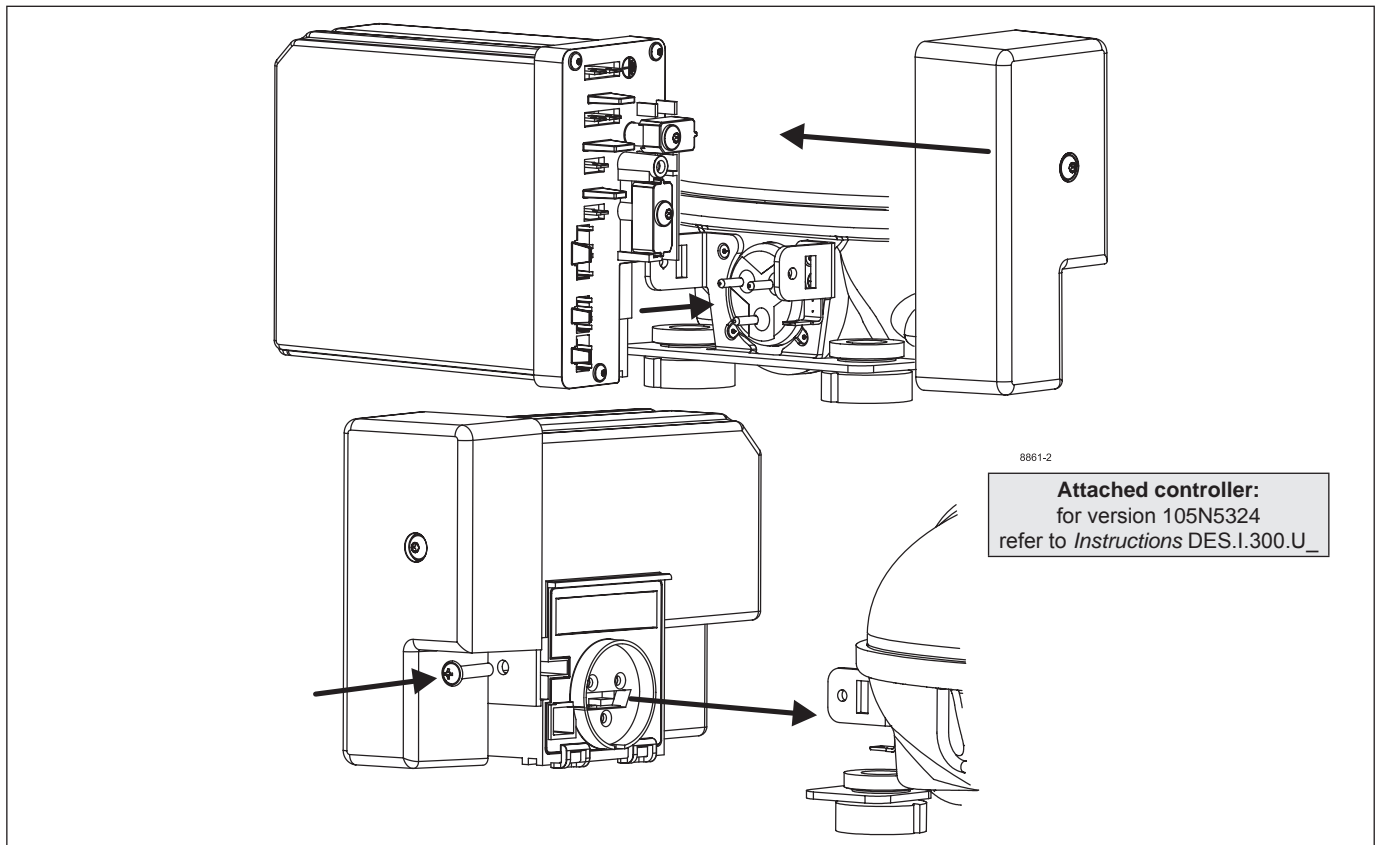

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without substantial changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com