

WITH MORE THAN 60 YEARS OF EXPERIENCE IN COMPRESSOR TECHNOLOGY AND HIGHLY DEDICATED EMPLOYEES, OUR FOCUS IS ON DEVELOPING AND

APPLYING ADVANCED COMPRESSOR TECHNOLOGIES TO ACHIEVE STANDARD SETTING PERFORMANCE FOR LEADING PRODUCTS AND BUSINESSES AROUND THE WORLD.

SECOP

SUPERIOR PERFORMANCE
FOR FUTURE ENERGY DEMANDS

R600a
NLU-KK.1 COMPRESSORS

1.98 COP

THE HIGHEST LEVEL EVER FROM A FIXED SPEED COMPRESSOR
THE HISTORICALLY HIGH EFFICIENCY BRINGS YOU ONE STEP CLOSER
TO COPING WITH FUTURE ENERGY DEMANDS (1.55 BY CECOMAF)





OPTIMISED FOR PURE EFFICIENCY: NLU-KK.1 COMPRESSORS

In today's global competition, manufacturers of refrigeration equipment are constantly looking for ways to improve the energy class of their cabinets, with the smallest possible investment. Decisions are typically driven by a mix of legislation and the end users' desire to purchase low-noise, energy-efficient products.

It is a fact that the compressor is the most power hungry component in a refrigeration system, so why not simply replace the existing compressor and save

considerable R&D and production resources, without sacrificing efficiency?

Designed to provide extreme efficiency, NLU-KK.1 compressors instantly improve the efficiency of a cabinet. With a COP of 1.98/1.55 (ASHRAE/CECOMAF) the compressor's performance is superior to a conventional compressor, providing you with the opportunity to produce cabinets that place you ahead of both your competitors and your customers' expectations.


General	NLU8.0KK.1	NLU8.8KK.1	NLU10KK.1	NLU11KK.1	NLU15KK.1
Code number	105H6008	105H6009	105H6131	105H6132	105H6553
Approvals	EN 60335-2-34 with Annex AA				

Application	
Application	LBP
Evaporating temperature °C	-35 to -10
Voltage range/frequency V/Hz	198 - 254/50

Performance data ASHRAE LBP (220V/50Hz • ePTC • run capacitor • static cooling)					
Evaporating temperature °C		-23.3	-23.3	-23.3	-23.3
Cooling capacity W		127	144	175	259
Power consumption W		66.0	72.9	88.5	101
COP W/W		1.93	1.97	1.98	1.95

Performance data EN 12900 Household/CECOMAF (220 V/50 Hz • ePTC • run capacitor • static cooling)					
Evaporating temperature °C		-25	-25	-25	-25
Cooling capacity W		95	107	130	194
Power consumption W		63.0	69.5	83.9	95.5
COP W/W		1.52	1.54	1.55	1.54

Dimensions		
Height mm	A	203
	B	197
Suction connector location/I.D. mm angle	C	6.2 15°
material seal		Cu-plated steel Al cap
Process connector location/I.D. mm angle	D	6.2 25°
material seal		Cu-plated steel Al cap
Discharge connector location/I.D. mm angle	E	5.0 21°
material seal		Cu-plated steel Al cap
Connector tolerance I.D. mm		±0.09, on 5.0 +0.12/+0.20

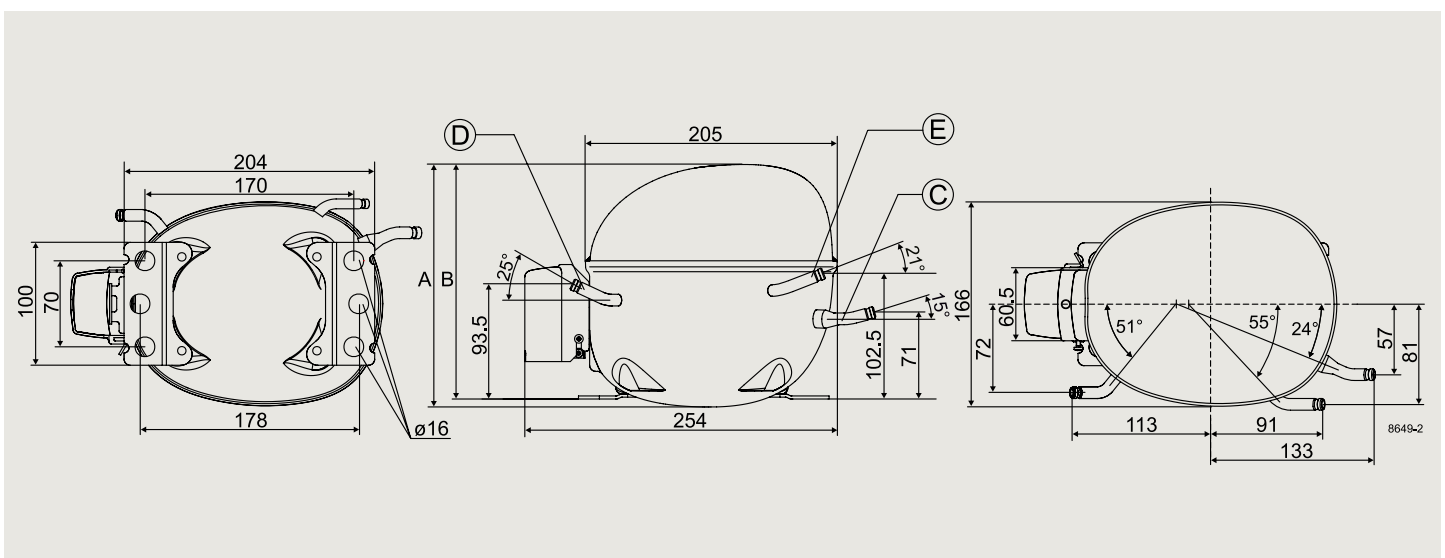

Secop GmbH · Mads-Clausen-Str. 7 · 24939 Flensburg · Germany · Tel: +49 461 4941 0 · www.secop.com

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

Produced by Secop | October 2017

DES.N.520.B4.02