

R290 · 115–127V | 50/60Hz · UL Recognized

ADAPTABLE CAPACITY AND INTELLIGENT CONTROL



SECCP



NLVE-CN CF Core Functions



Commercial Applications



Variable-Speed Efficiency



Wide Application Range



Optimal Energy Consumption



Effective Solutions



Sustainability

- Energy savings of up to 40% compared to a fixed speed R404A compressor
- Suitable for both LBP and MBP applications
- Able to operate continuously inside an evaporating temperature range from -40 to 0°C
- Intelligent variable-speed drive controller with automatic input detection and IP31 housing
- The controller provides a high starting torque and can start against a high differential pressure
- 2-speed defrost control
- An extra input that can be connected to the defrost relay output of the temperature controller

Secop's variable speed **NLVE-CN** propane compressor solution provides perfect cooling efficiency, tailor-made features, and easy integration within a single unit while ensuring considerable energy savings. The perfect choice for food retail, food storage, and other commercial applications.

It comes with our **CF (Core Functions)** controller featuring speed control through Adaptive Energy Optimization (AEO), frequency signal, or serial communication.

The new CF controller features a robust and safe fire-proof IP31 housing, and coated PCB.

The NLVE-CN is the right choice if you are looking for a green solution using the environmentally-friendly refrigerant propane (R290) with a low global warming potential (GWP 3).


General		NLVE13CN
Compressor		105H7374
Electronic unit - CF Core Functions	115 V	105N4100
Approvals (US GFCI-Conformity)	50/60 Hz	UL

Application		R290
Application		LBP/MBP
Evaporating temperature	°F (°C)	-40 to 32 [-40 to 0]
Input voltage range / frequency	V/Hz	100-140 / 50/60
Speed range	rpm	2000-4500

Performance Data ASHRAE LBP (115 V, 50/60 Hz • fan cooling) @ -10 °F (-23.3 °C) evaporating temperature					
Speed	rpm	2000	3000	3500	4500
Cooling capacity	BTU/h	1496	2296	2666	3317
	W	438	672	781	971
Power consumption	W	247	374	441	572
EER	BTU/Wh	6.05	6.14	6.04	5.79
COP	W/W	1.77	1.80	1.77	1.70
Test conditions	Condensing temp.: 130 °F (54.4 °C) Suction gas temp.: 90 °F (32.2 °C) Ambient temp.: 90 °F (32.2 °C) Liquid temp.: 90 °F (32.2 °C)				

Performance Data ASHRAE MBP (115 V, 50/60 Hz • fan cooling) @ 20 °F (-6.7 °C) evaporating temperature					
Speed	rpm	2000	3000	3500	4500
Cooling capacity	BTU/h	2619	4065	4703	5759
	W	767	1190	1377	1686
Power consumption	W	341	545	646	821
EER	BTU/Wh	7.68	7.46	7.29	7.01
COP	W/W	2.25	2.19	2.13	2.05
Test conditions	Condensing temp.: 130 °F (54.4 °C) Suction gas temp.: 95 °F (35 °C) Ambient temp.: 90 °F (32.2 °C) Liquid temp.: 115 °F (46.1 °C)				

Dimensions				
Height	inch (mm)	A	7.99 (203)	
		B	7.76 (197)	
Suction connector	location/I.D. inch (mm) angle material seal	C	0.320-0.327 (8.2 ±0.09)	
			15° Copper Rubber plug	
Process connector	location/I.D. inch (mm) angle material seal	D	0.252-0.259 (6.5 ±0.09)	
			25° Copper Rubber plug	
Discharge connector	location/I.D. inch (mm) angle material seal	E	0.252-0.259 (6.5 ±0.09)	
			21° Copper Rubber plug	

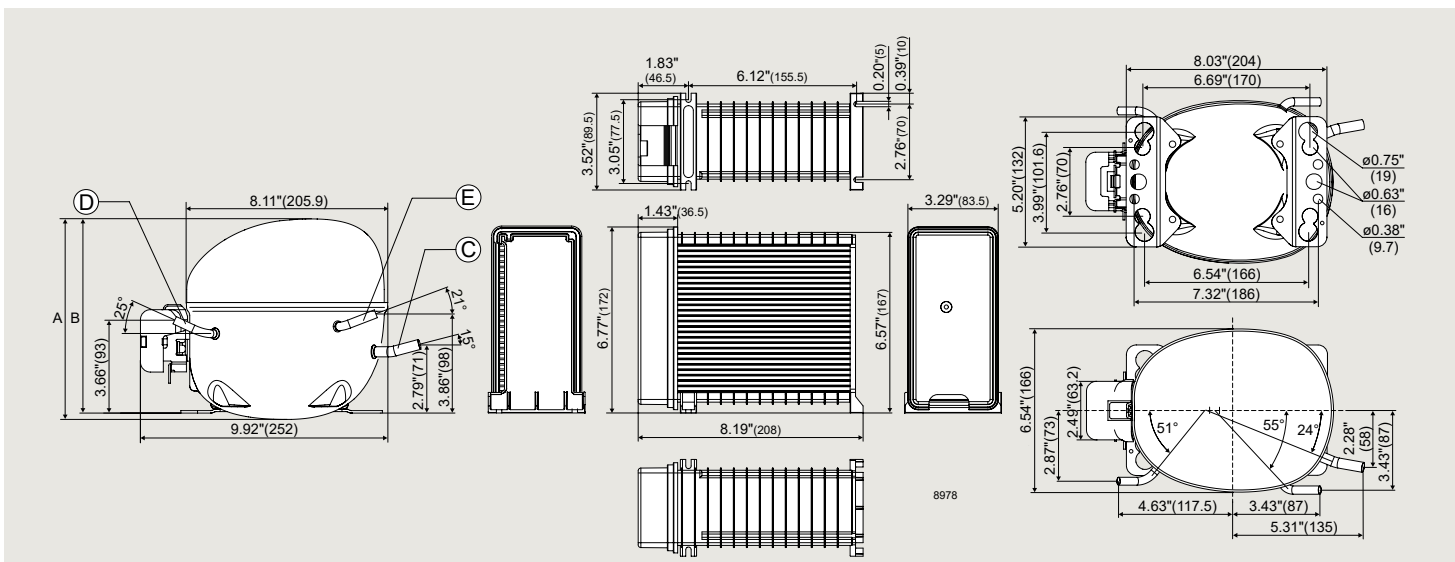

Secop GmbH · Lise-Meitner-Str. 29 · 24941 Flensburg, Germany · Tel: +49 461 4941 0 · www.secop.com

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.