

SCE & SCE Plus Compressors

Optimized Electrical CSCR System



SECOP


Keep electrical equipment clear from oil, chemicals, and water



When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

CSCR

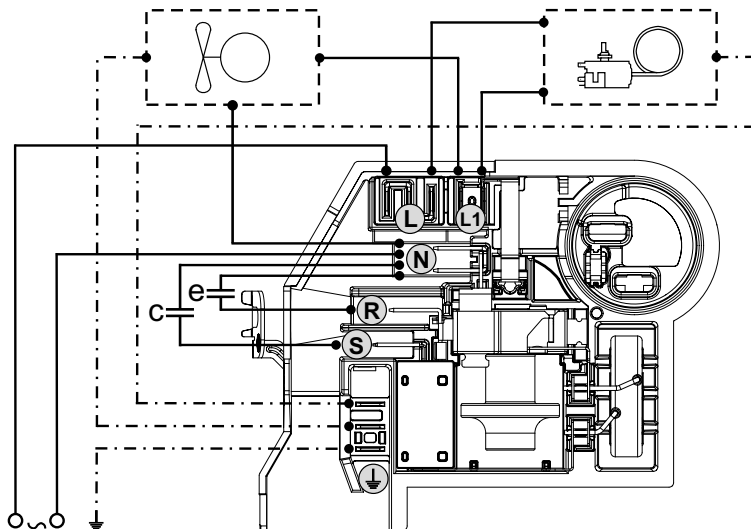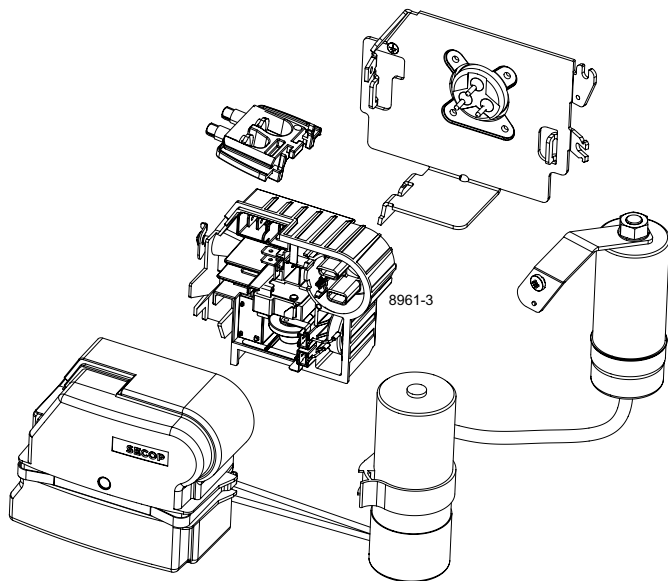

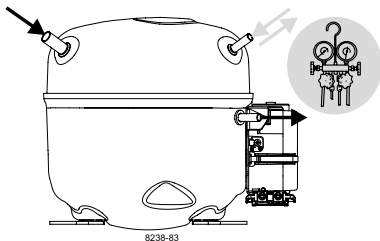

SCE & SCE Plus Compressors

Optimized Electrical CSCR System

SECCP


Keep electrical equipment
clear from oil, chemicals,
and water




When operated with a flammable
refrigerant, only spark-proof
starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf

(applies to all flammable refrigerants)



8545

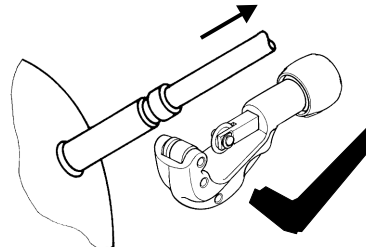

Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations.** www.seccp.com