Single
Packs

SECOP

Single Pack NLE15LNDX 220-240V 50Hz CSCR

Single pack code number: **195B4836**

Position	Title	Code	Amount
1	Compressor NLE15LNDX	105H7500	1
2	Start equipment NLE	117U8201	1
3	Starting capacitor (80µF 260V)	117U5353	1
4	Run Capacitor (10µF 450V, 6.3mm)	117-7166	1
5	Run capacitor bracket	117-0314	1
6	Cover NLE	117U1038	1
7	Cord relief	103N1007	1
8	Screw for bracket M4x8mm	117-0301	1
9	Bolt joint for one compressor | M6 | ø16mm	118-1917	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • **www.secop.com**

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

Technical Data Compressor

SECOP

Model

Designation	**NLE15LNDX**	**220-240V/50Hz 1~**	Sales code:	**105H7500**

Compressor design

Oil type	Polyolester	Refrigerant(s)	**R290**
Oil viscosity	32cSt	Displacement	14,65cm³ / 0,89cu.in
Oil quantity	298cm³ / 10,1fl.oz	Compressors on pallet	
Refr. charge - tech. limit	300g / 10,6oz		
Free gas volume comp.	2360cm³ / 79,8fl.oz		
Weight	11,8kg / 26lbs		
Motor protection	external		
Winding resistance main	7,1Ω (at 25°C)		
Winding resistance aux	12,4Ω (at 25°C)		
Max. winding temp.	125°C / 257°F		
Max. discharge temp.	130°C / 266°F		

General - Configurations with NLE15LNDX

	Conf. 1
Motor configuration	CSCR
Power supply (nominal)	220-240V/50Hz
Number of phases	1
Voltage range	198-254V
Approvals	VDE
Starting torque	HST
Note	- / -

Applications with NLE15LNDX

	Conf. 1
Refrigerant	R290
Application	LBP
System cooling	fan 3m/s
Hot gas defrost	OK
Long interval pull down	-/-

Electrical data - Configurations with NLE15LNDX

	Conf. 1
Starting device type	relay
Run capacitor	10µF
Start capacitor	80µF
LRA (locked rotor amps / 4s/ $U_{(N)}$)	16,8A
RLA (rated load amps / 1s/ $U_{(N)}$)	2,3A
Cut in current ($U_{(N)}$)	16,8A

Model

Designation **NLE15LNDX** **220-240V/50Hz 1~** Sales code: **105H7500**

Compressor dimensions

Housing	A Height	209mm / 8,23in
	B Height	203mm / 7,99in
	C Length shell	205mm / 8,07in
	D Length w. cover	262mm / 10,31in
	E Width	166mm / 6,54in

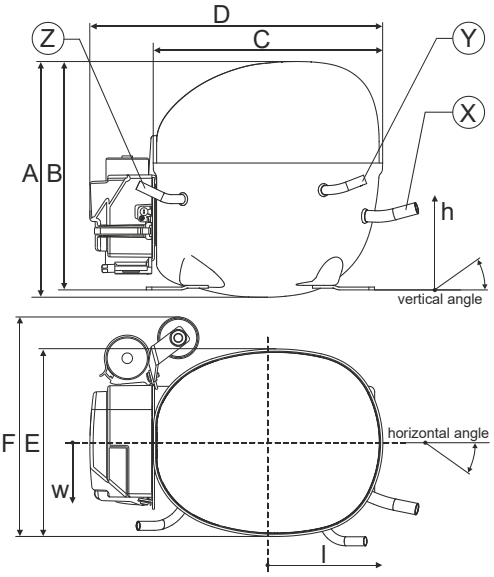

Connectors		**Suction** X	**Discharge** Y	**Process** Z
Diameter	[mm]	øi 8,11-8,29	øi 6,11-6,29	øi 6,11-6,29
(i:inside, o:outside)	[in]	øi 0,32-0,33	øi 0,24-0,25	øi 0,24-0,25
Material		copper	copper	copper
Horizontal angle	±2°	11°	0°	0°
Vertical angle	±2°	15°	21°	25°
Position l/h/w	[mm]	140/72/59	94/98/87	-109/93/74
	[in]	5,5/2,8/2,3	3,7/3,9/3,4	-4,3/3,7/2,9
Straight tube l.	[mm]	12	12	12
	[in]	0,5	0,5	0,5

Compressor fixation

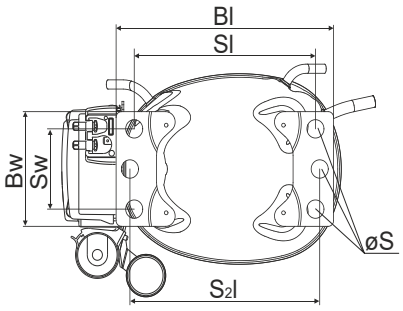

Baseplate	[mm]	[inch]
Bl	204	8.03
Bw	100	3.94

Small holes	[mm]	[inch]
Sl	170	6.7
Sw	70	2.76
S2l	178	7
øS	ø 16	ø 0.63

Bolt joint



Snap-on



Mounting accessories	one comp.	multi pack
Bolt joint | M6 | ø16mm	118-1917	118-1918
Bolt joint | ø1/4" | ø16mm	118-1946	
Snap-on | ø7,3 | ø16mm	118-1947	118-1919

Application notes

Provision for PE Grounding is located at the PE Stamp on the compressor

Model

Designation					
	NLE15LNDX	**220-240V/50Hz**	**Conf. 1**	Sales code:	**105H7500**

Configuration

Motor configuration	CSCR
Power supply (nominal)	220-240V/50Hz 1~
Refrigerant	R290
Application	LBP
Voltage range	198-254V
Starting torque	HST
Approvals	VDE

Ambient/ machine room temperatures minimum /maximum

Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	fan 3m/s

Operation pressure range

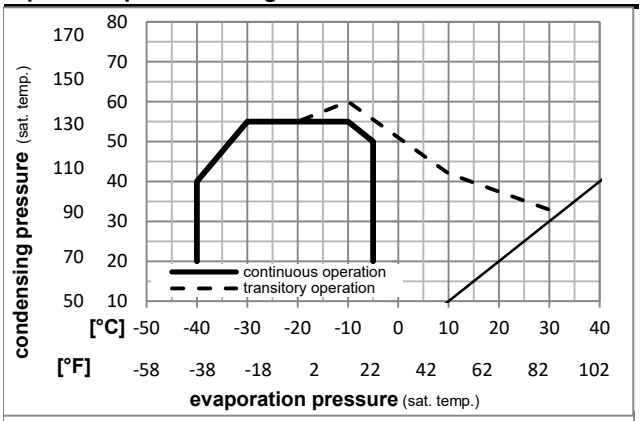

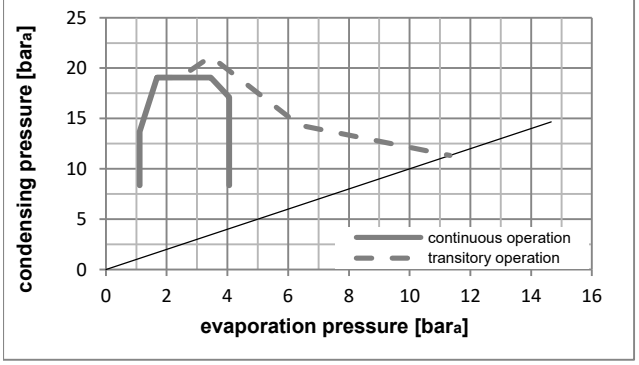

Electrical accessories / wiring diagram

CSCR

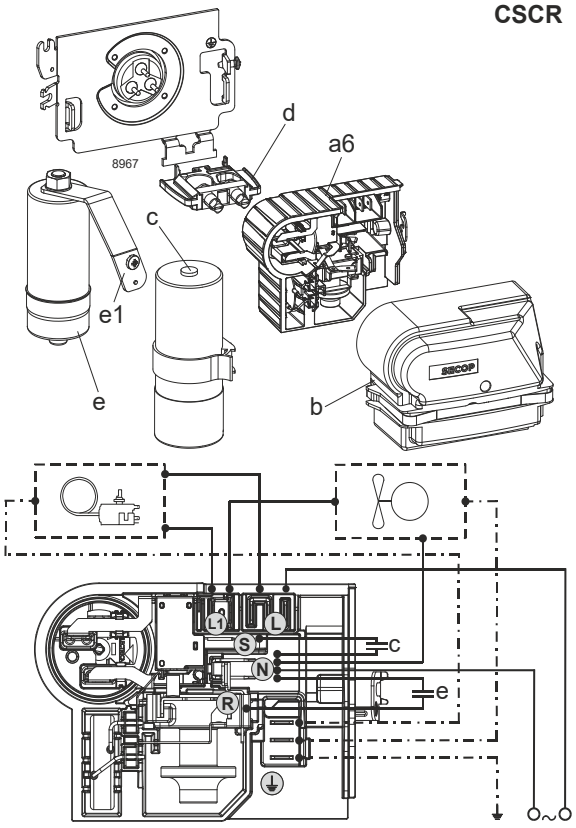

Components

a6	NL starter kit	117U8201
c	start capacitor (80µF)	117U5353
e	run cap (10µF, 6.3mm,c.length 280mm)	117-7166
b	cover terminal board + clamp	117U1038
e1	retaining clamp	117-0314
	screw M4x8mm	117-0301
d	cord relief	103N1007

Model

Designation **NLE15LNDX** **220-240V/50Hz** **Conf. 1** Sales code: **105H7500**

Optimization + standard conditions R290, 220V/50Hz, CSCR, fan 3m/s, VDE

	Evaporating pressure (saturation temperature) pe	Condensing pressure (saturation temperature) pc	Return gas temp. RGT	Liquid temp. Tliq	Cooling capacity [W]	[Btu/h]	[kcal/h]	COP [W/W]	EER [Btu/Wh]	[kcal/Wh]	Power consumption P1 [W]	Current consumption I [A]	Ref. mass flow ṁ [kg/h]	
[°C]	-23	54	32	32	775,2	2647	667,1	1,71	5,86	1,48	452,1	2,16	7,85	**ASHRAE LBP**
[°F]	-10	130	90	90										
[°C]	-25	55	32	55	585,3	1999	503,7	1,34	4,59	1,16	435,6	2,09	7,29	**cecomaf LBP**
[°F]	-13	131	90	131										
[°C]	-35	40	20	40	437,7	1495	376,7	1,38	4,70	1,18	318,2	1,61	5,00	**EN12900 LBP**
[°F]	-31	104	68	104										
[°C]	-23	49	4,4	49	620,6	2119	534,1	1,41	4,82	1,22	439,3	2,10	8,59	**ARI540 LBP**
[°F]	-10	120	40	120										
[°C]	-23	41	32	32	809,3	2764	696,5	1,94	6,63	1,67	416,7	2,00	8,20	**AHAM LBP**
[°F]	-10	105	90	90										
[°C]	-35	45	32	45	422,4	1442	363,5	1,30	4,44	1,12	324,9	1,64	4,73	**opt**
[°F]	-31	113	90	113										

Performance tables R290, 220V/50Hz, CSCR, fan 3m/s, VDE

	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-40	-40	323,1	1103	278,0	1,14	3,91	0,98	282,5	1,50	3,61
cond. pressure	-35	-31	422,4	1442	363,5	1,30	4,44	1,12	324,9	1,64	4,73
pc= 45/113	-30	-22	537,0	1834	462,1	1,46	4,97	1,25	368,9	1,80	6,04
return gas temp.	-25	-13	668,9	2284	575,7	1,62	5,52	1,39	414,1	1,99	7,54
RGT= 32/90	-20	-4	820,2	2801	705,8	1,78	6,09	1,53	460,1	2,20	9,29
liquid temp	-15	5	992,7	3390	854,3	1,96	6,69	1,69	506,5	2,41	11,29
Tliq= 45/113	-5	23	1409,6	4814	1213,2	2,35	8,03	2,02	599,4	2,84	16,23
[°C / °F]	-40	-40	266,4	910	229,2	0,92	3,15	0,79	288,9	1,52	3,28
cond. pressure	-35	-31	360,1	1230	309,9	1,07	3,67	0,92	335,1	1,68	4,45
pc= 55/131	-30	-22	465,7	1591	400,8	1,21	4,14	1,04	384,1	1,87	5,78
return gas temp	-25	-13	585,3	1999	503,7	1,34	4,59	1,16	435,6	2,09	7,29
RGT= 32/90	-20	-4	720,9	2462	620,4	1,47	5,03	1,27	489,3	2,33	9,02
liquid temp	-15	5	874,3	2986	752,5	1,60	5,48	1,38	544,8	2,58	10,99
Tliq= 55/131	-5	23	1243,1	4245	1069,8	1,88	6,44	1,62	659,5	3,11	15,84

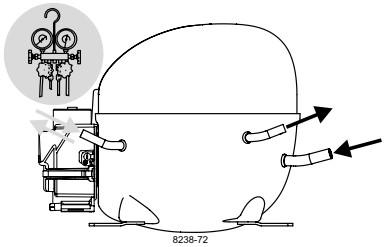

NLE Plus Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

CSCR

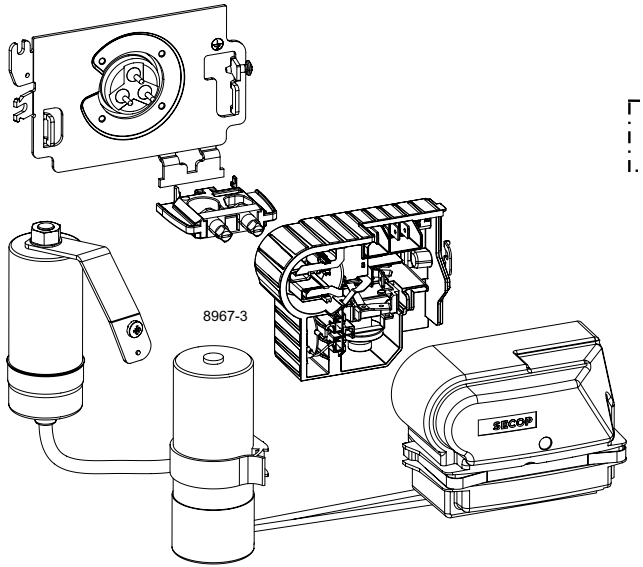

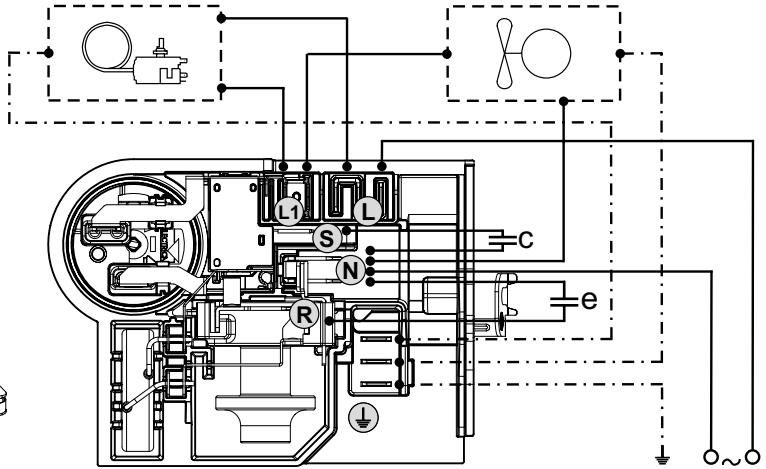

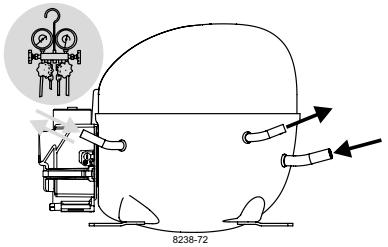

NLE Plus Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf

(applies to all flammable refrigerants)

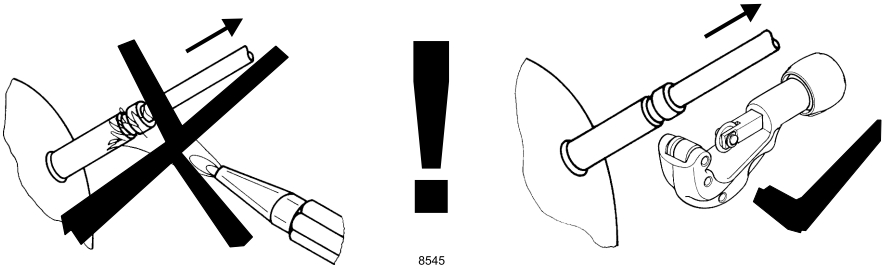

Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.secop.com**