Singolo
Imballi

Single Pack NLX15KK.3 220-240V 50Hz RSCR

Codice Imballo Singolo: **195B4150**

Posizione	Titolo	Codice	Quantità
1	Compressor NLX15KK.3	105H6506	1
2	PTC starting device (220V, 250hm, 4.8mm)	103N0021	1
3	Protection screen for PTC	103N0476	1
4	Run capacitor (3.5µF 320V, 4.8mm)	117-7140	1
5	Cord relief	103N1010	1
6	Cover	103N2010	1
7	Bolt joint for one compressor | M6 | ø16mm	118-1917	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • **www.secop.com**

Secop non si assume alcuna responsabilità per eventuali errori presenti in cataloghi, brochure e altro materiale stampato. Secop si riserva il diritto di modificare i propri prodotti senza preavviso. Ciò vale anche per i prodotti già ordinati, a condizione che tali modifiche possano essere apportate senza che siano necessarie modifiche successive alle specifiche già concordate. Tutti i marchi presenti in questo materiale sono di proprietà delle rispettive aziende. Secop e il logo Secop sono marchi di Secop GmbH. Tutti i diritti sono riservati.

Model
NLX15KK.3

Sales code:
105H6506

Compressor Data

Refrigerant(s)	**R600a**
Refr. charge - tech. limit	**150g / 5.29oz**
Weight	**10.80 kg / 23.81lbs**
Displacement	**14.65 cm3 / 0.89cu.in**
Compressors on pallet	**80**

General – Configurations With NLX15KK.3

–	**Conf. 1**
Motor configuration	RSCR
Power supply (nominal)	220-240 V/50 Hz
Number of phases	1
Voltage range	198-254 V
Approvals	VDE, CB
Starting torque	LST
Refrigerant	R600a
Application	LBP

Application Notes

- Provision for PE Grounding is located at the PE Stamp on the compressor

Model
NLX15KK.3

Sales code:
105H6506

Compressor Design

Oil type	**Mineral**	Free gas volume comp.	**2,360 cm3 / 79.80fl.oz**
Oil viscosity	**5cSt**	Max. winding temp.	**120 °C**
Oil quantity	**265 / 8.96fl.oz**	Max. discharge temp.	**130°C / 266°F**

Compressor Dimensions

Housing

A Height	**203mm / 7.99in**
B Height	**197mm / 7.76in**
C Length shell	**205mm / 8.07in**
D Length w. cover	**254mm / 10.00in**
E Width	**166mm / 6.54in**

Find 3D Model here

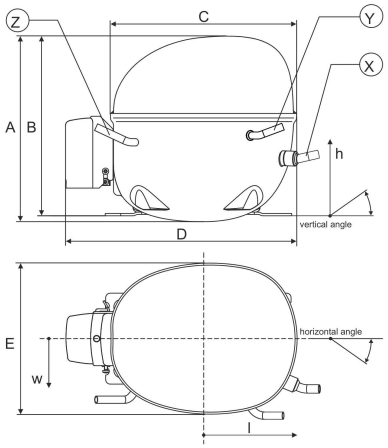

Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 6.11–6.29 / 0.24–0.25in	øi 5.12–5.22 / 0.20–0.21in	øi 6.11–6.29 / 0.24–0.25in
Material	CU	CU	CU
Horizontal angle ±2°	0°	0°	0°
Vertical angle ±2°	15°	35°	155°
Position l/h/w [mm]	125.5/75.5/78 / 4.94/2.97/3.07in	133/102.5/54 / 5.24/4.04/2.13in	-107/93.5/72 / -4.21/3.68/2.83in
Straight tube l. [mm]	12 / 0.47in	12 / 0.47in	12 / 0.47in

Mounting Accessories

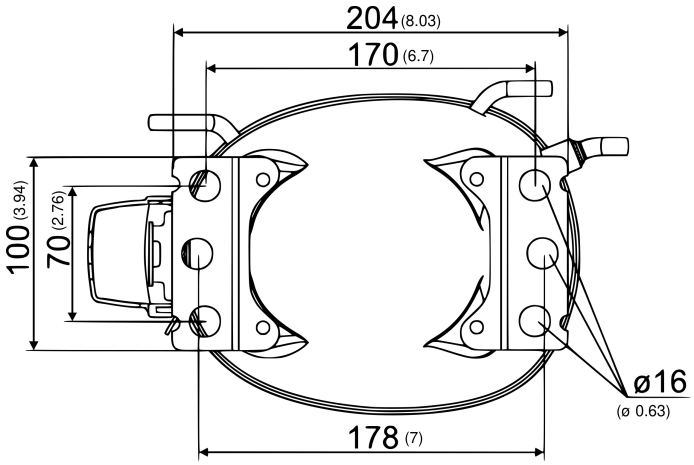

Dimensions in mm [in]

Model
NLX15KK.3 Configuration 1

Sales code:
105H6506

Configuration

Motor configuration	**RSCR**
Power supply (nominal)	**220-240 V/50 Hz 1~**
Refrigerant	**R600a**
Application	**LBP**
Voltage range	**198-254 V**
Starting torque	**LST**
Approvals	**VDE, CB**
Starting device type	**PTC**
Run capacitor	**4 µF**
Start capacitor	**-/-**
RLA (rated load amps / 1s/ U(N))	**-/-A**

Ambient/ machine room temperatures minimum /maximum
Ambient temperature range: 10 - 38°C / 50 - 100°F
Machine room temp. compressor: 10 - 43°C / 50 - 109°F

System Cooling
static

Electrical Accessories / Wiring Diagram

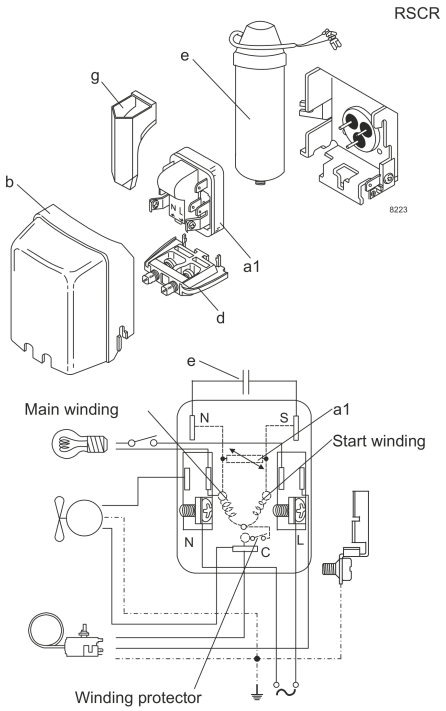

View full size

Components
a1 PTC starter (220V, 25Ohm, 4.8mm) 103N0021
e run capacitor (4µF, 4.8mm) 117-7119
b plastic cover 103N2010
d cord relief 103N1010
g protection screen for PTC 103N0476
bracket for run capacitor 117-0300

Alternative components
a1 e-PTC starter (220V, 25Ohm, 4.8mm) 103N0050
b plastic cover 103N2011
screw M4x8mm 117-0301

Operation Pressure Range

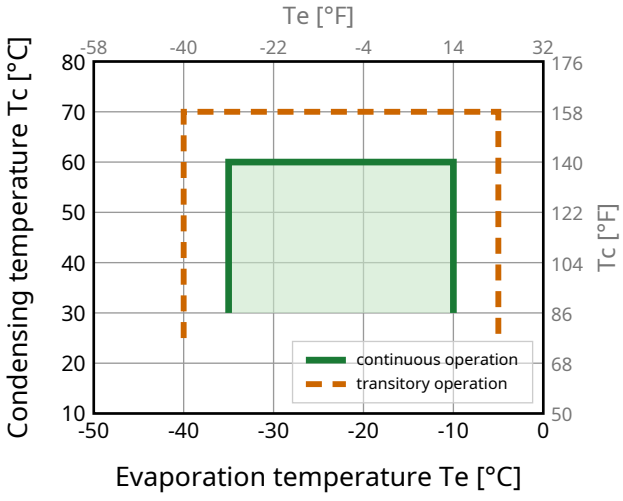

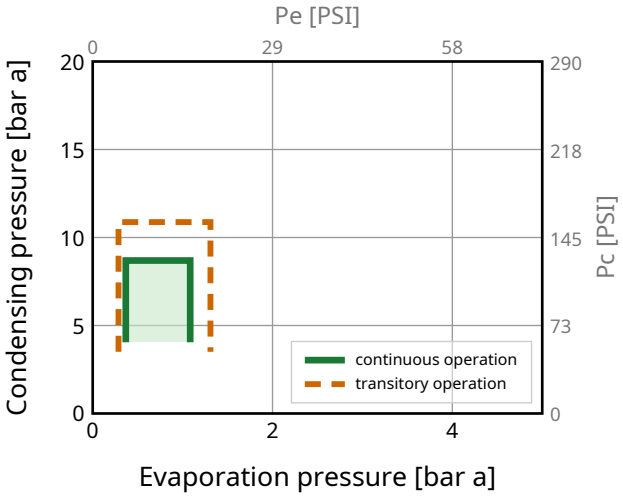

Model

NLX15KK.3 Configuration 1

Sales code:

105H6506

Standard Conditions

R600a, 220 V/50 Hz, RSCR, static

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	ṁ	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	**253**	863	218	**1.85**	6.30	137	0.62	2.72	**ASHRAE LBP**
-25 -13	55 131	32 89.6	55 131	**190**	647	163	**1.45**	4.95	131	0.60	2.47	**CECOMAF LBP**
-35 -31	40 104	20 68	40 104	**137**	466	117	**1.46**	4.98	94	0.41	1.66	**EN12900 LBP**
-23.3 -10	48.8 119.8	4.4 39.9	48.8 119.8	**212**	723	182	**1.58**	5.40	134	0.59	3.09	**ARI540 LBP**
-23.3 -10	40.6 105.1	32.2 90	32.2 90	**285**	971	245	**2.20**	7.50	130	0.53	3.06	**AHAM LBP**
-35 -31	45 113	32 89.6	45 113	**128**	438	110	**1.36**	4.66	94	0.44	1.52	**opt LBP**

Performance Tables

R600a, 220 V/50 Hz, RSCR, static

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	ṁ
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	**128**	438	110	**1.36**	4.66	94	0.44	1.52
-30	-22	**173**	591	149	**1.60**	5.46	108	0.46	2.06
-25	-13	**229**	780	197	**1.82**	6.22	125	0.53	2.72
-20	-4	**296**	1011	255	**2.04**	6.97	145	0.64	3.53
-15	5	**378**	1290	325	**2.27**	7.73	167	0.77	4.52
-10	14	**476**	1623	409	**2.50**	8.53	190	0.90	5.70

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	**108**	370	93	**1.08**	3.67	101	0.53	1.41
-30	-22	**144**	491	124	**1.27**	4.32	114	0.54	1.88
-25	-13	**190**	647	163	**1.45**	4.95	131	0.60	2.47
-20	-4	**247**	842	212	**1.63**	5.56	152	0.70	3.22
-15	5	**317**	1083	273	**1.81**	6.17	176	0.82	4.15
-10	14	**403**	1376	347	**1.99**	6.80	202	0.96	5.29

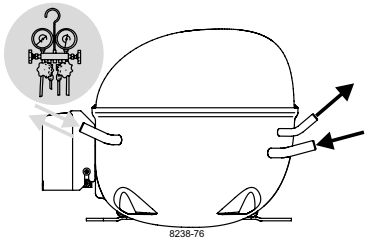

NL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

RSIR





CSIR

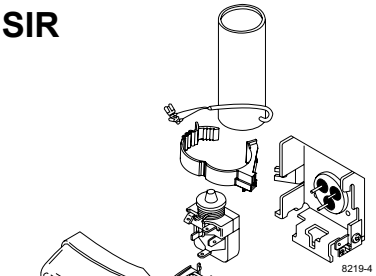

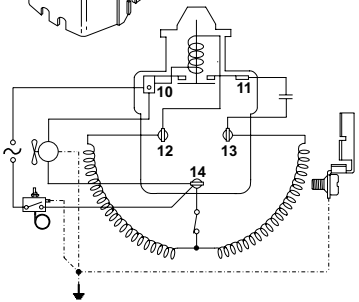

RSCR

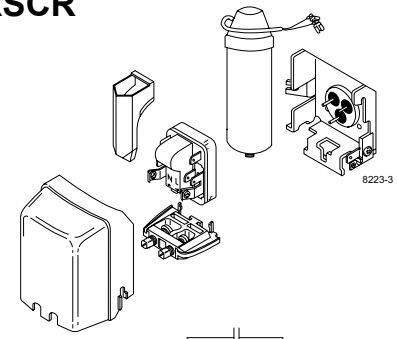



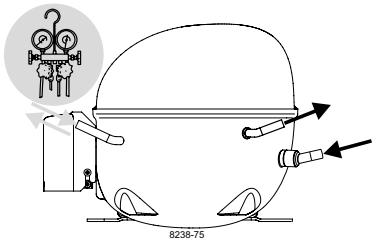

NL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf

(applies to all flammable refrigerants)

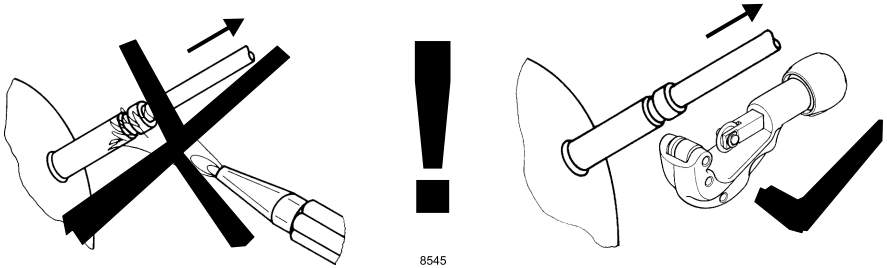

Brazing on Suction Connectors (Direct Intake)

representative image

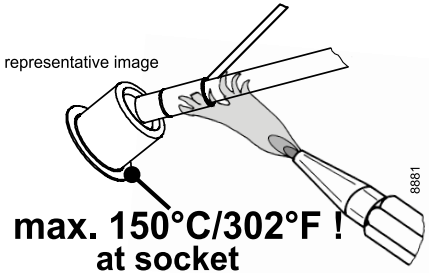

! max. 150°C/302°F ! at socket

brazing solder: phosphor (LP7) or silver

Refer to Product Bulletin:
Brazing on Suction Connectors (Compressors with Direct Suction Intake)

Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.secop.com**