Singolo
Imballi

# Single Pack NLE12.6MN 220-240V 50Hz CSIR

Codice Imballo Singolo: **195B4196**

| Posizione | Titolo | Codice | Quantità |
|---|---|---|---|
| 1 | Compressor NLE12.6MN | 105H6377 | 1 |
| 2 | Starting relay | 117U7011 | 1 |
| 3 | Starting capacitor (80µF 220V, 6.3mm) | 117U5015 | 1 |
| 4 | Cord relief | 103N1010 | 1 |
| 5 | Cover | 103N2010 | 1 |
| 6 | Bolt joint for one compressor \| M6 \| ø16mm | 118-1917 | 1 |

**Secop GmbH** • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • **www.secop.com**

Secop non si assume alcuna responsabilità per eventuali errori presenti in cataloghi, brochure e altro materiale stampato. Secop si riserva il diritto di modificare i propri prodotti senza preavviso. Ciò vale anche per i prodotti già ordinati, a condizione che tali modifiche possano essere apportate senza che siano necessarie modifiche successive alle specifiche già concordate. Tutti i marchi presenti in questo materiale sono di proprietà delle rispettive aziende. Secop e il logo Secop sono marchi di Secop GmbH. Tutti i diritti sono riservati.

**Model**
**NLE12.6MN**

Sales code:
**105H6377**

## Compressor Data

| | |
|---|---|
| Refrigerant(s) | **R290** |
| Refr. charge - tech. limit | **300g / 10.58oz** |
| Weight | **12.10 kg / 26.68lbs** |
| Displacement | **12.55 cm3 / 0.77cu.in** |
| Compressors on pallet | **80** |

## General – Configurations With NLE12.6MN

| – | **Conf. 1** | **Conf. 2** | **Conf. 3** |
|---|---|---|---|
| Motor configuration | CSIR | eRSIR | eRSCR |
| Power supply (nominal) | 220-240 V/50 Hz | 220-240 V/50 Hz | 220-240 V/50 Hz |
| Number of phases | 1 | 1 | 1 |
| Voltage range | 198-254 V | 198-254 V | 198-254 V |
| Approvals | VDE, CCC, EAC | VDE, CCC, EAC | VDE, CCC, EAC |
| Starting torque | HST | LST | LST |
| Refrigerant | R290 | R290 | R290 |
| Application | LBP+MBP | LBP+MBP | LBP+MBP |
| Hot gas defrost | OK | OK | OK |
| Long interval pull down | OK | OK | OK |

## Application Notes

- Provision for PE Grounding is located at the PE Stamp on the compressor

**Model**
**NLE12.6MN**

Sales code:
**105H6377**

## Compressor Design

| | | | |
|---|---|---|---|
| Oil type | **POE** | Winding resistance main | **5 Ohm** |
| Oil viscosity | **32cSt** | Winding resistance aux | **9.9 Ohm** |
| Oil quantity | **298 / 10.08fl.oz** | Max. winding temp. | **125 °C** |
| Free gas volume comp. | **2,360 cm3 / 79.80fl.oz** | Max. discharge temp. | **130°C / 266°F** |
| Motor protection | **internal** | | |

## Compressor Dimensions

**Housing**

| | |
|---|---|
| A Height | **203mm / 7.99in** |
| B Height | **197mm / 7.76in** |
| C Length shell | **205mm / 8.07in** |
| D Length w. cover | **254mm / 10.00in** |
| E Width | **166mm / 6.54in** |

Find 3D Model here

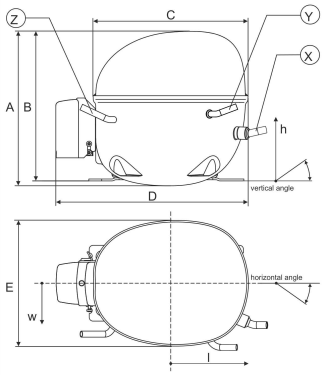


| Connectors | Suction X | Discharge Y | Process Z |
|---|---|---|---|
| Diameter [mm] | øi 8.11–8.29 / 0.32–0.33in | øi 6.11–6.29 / 0.24–0.25in | øi 6.11–6.29 / 0.24–0.25in |
| Material | CU | CU | CU |
| Horizontal angle ±2° | 0° | 0° | 0° |
| Vertical angle ±2° | 15° | 21° | 155° |
| Position l/h/w [mm] | 132/68.5/56.7 / 5.20/2.70/2.23in | 94/101.7/81 / 3.70/4.00/3.19in | -109.3/94.3/72 / -4.30/3.71/2.83in |
| Straight tube l. [mm] | 12 / 0.47in | 12 / 0.47in | 12 / 0.47in |

## Mounting Accessories

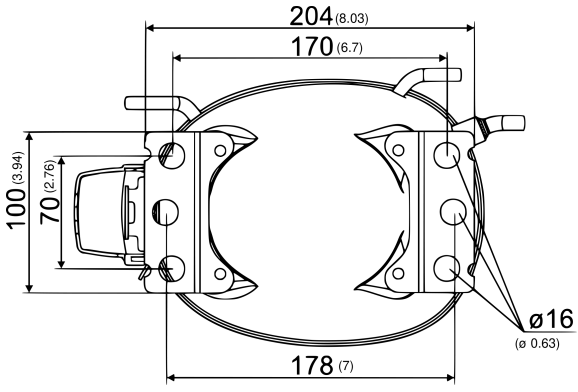


Dimensions in mm [in]

Bolt joint




Snap-on




| | one comp. | multi pack |
|---|---|---|
| Bolt joint \| M6 \| ø16mm | 118-1917 | 118-1918 |
| Bolt joint \| ø1/4" \| ø16mm | 118-1946 | – |
| Snap-on \| ø7,3 \| ø16mm | 118-1947 | 118-1919 |

**Model**
**NLE12.6MN** Configuration 1

Sales code:
**105H6377**

## Configuration

| | |
|---|---|
| Motor configuration | **CSIR** |
| Power supply (nominal) | **220-240 V/50 Hz 1~** |
| Refrigerant | **R290** |
| Application | **LBP+MBP** |
| Voltage range | **198-254 V** |
| Starting torque | **HST** |
| Approvals | **VDE, CCC, EAC** |
| Starting device type | **relay** |
| Run capacitor | **-/-** |
| Start capacitor | **80 µF** |
| LRA (locked rotor amps / 4s/ U(N)) | **15.6 A** |
| RLA (rated load amps / 1s/ U(N)) | **2.7 A** |
| Cut in current (U(N)) | **21.2 A** |

**Ambient/ machine room temperatures minimum /maximum**
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

**System Cooling**
fan 3m/s

## Electrical Accessories / Wiring Diagram

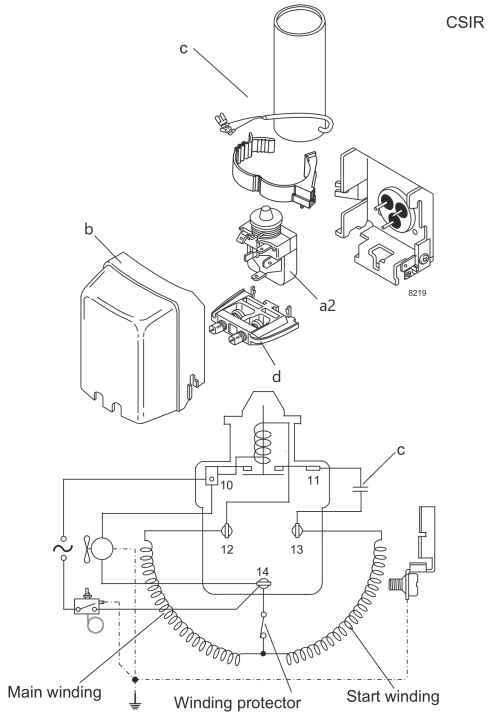


View full size

**Components**
**a2** relay 117U7011
**c** start capacitor (80µF) 117U5015
**b** plastic cover 103N2010
**d** cord relief 103N1010

**Alternative components**
**b** plastic cover 103N2011

## Operation Pressure Range

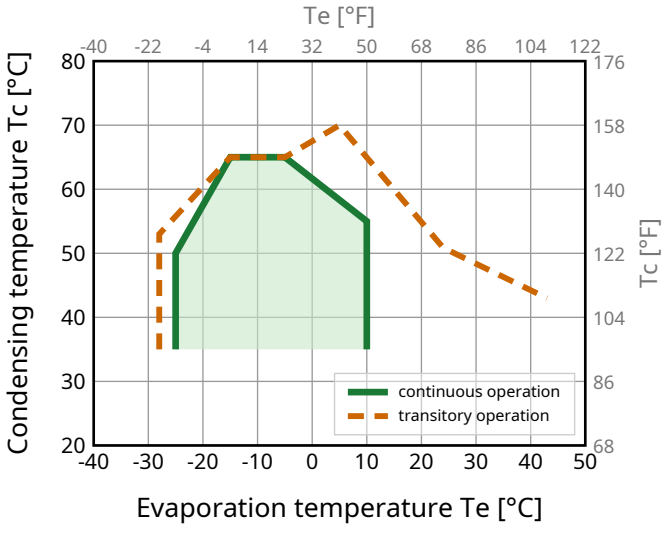


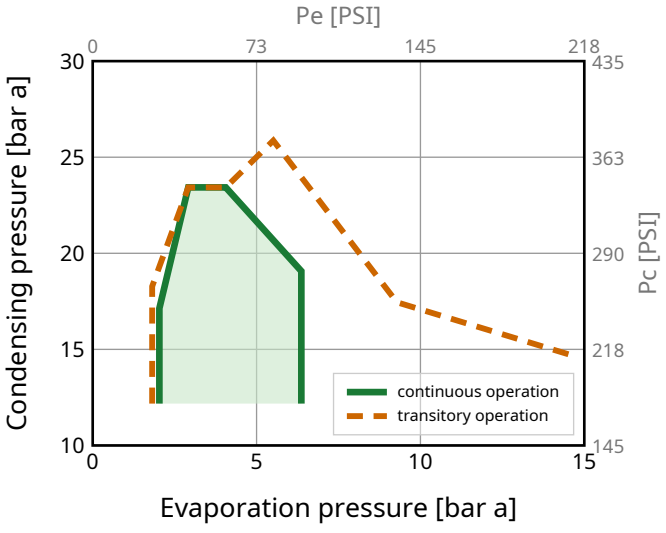

**Model**
**NLE12.6MN** Configuration 1

Sales code:
**105H6377**

## Standard Conditions

**R290**, 220 V/50 Hz, CSIR, fan 3m/s

| pe | pc | RGT | Tliq | Cooling capacity | | | COP | EER | P | I | ṁ | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| [°C] [°F] | [°C] [°F] | [°C] [°F] | [°C] [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [W] | [A] | [kg/h] | |
| -23.3 -10 | 54.4 129.9 | 32.2 90 | 32.2 90 | **604** | 2060 | 519 | **1.57** | 5.34 | 386 | 2.54 | 6.13 | **ASHRAE LBP** |
| -25 -13 | 55 131 | 32 89.6 | 55 131 | **452** | 1541 | 388 | **1.21** | 4.14 | 373 | 2.49 | 5.66 | **CECOMAF LBP** |
| -35 -31 | 40 104 | 20 68 | 40 104 | **362** | 1237 | 312 | **1.33** | 4.54 | 272 | 2.14 | 4.16 | **EN12900 LBP** |
| -6.7 20 | 54.4 129.9 | 35 95 | 46.1 115 | **1061** | 3619 | 912 | **1.98** | 6.74 | 537 | 3.10 | 12.14 | **ASHRAE MBP** |
| -10 14 | 55 131 | 32 89.6 | 55 131 | **843** | 2875 | 725 | **1.66** | 5.66 | 508 | 2.99 | 10.72 | **CECOMAF MBP** |
| -10 14 | 45 113 | 20 68 | 45 113 | **950** | 3242 | 817 | **2.06** | 7.01 | 462 | 2.77 | 11.70 | **EN12900 MBP** |

## Performance Tables

**R290**, 220 V/50 Hz, CSIR, fan 3m/s

**pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F**

| pe | | Cooling capacity | | | COP | EER | P | I | ṁ |
|---|---|---|---|---|---|---|---|---|---|
| [°C] | [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [W] | [A] | [kg/h] |
| -25 | -13 | **536** | 1830 | 461 | **1.53** | 5.21 | 352 | 2.41 | 6.08 |
| -20 | -4 | **663** | 2262 | 570 | **1.71** | 5.83 | 388 | 2.52 | 7.54 |
| -15 | 5 | **813** | 2774 | 699 | **1.91** | 6.52 | 425 | 2.65 | 9.29 |
| -10 | 14 | **988** | 3371 | 850 | **2.14** | 7.29 | 462 | 2.77 | 11.34 |
| -5 | 23 | **1190** | 4059 | 1023 | **2.38** | 8.13 | 499 | 2.91 | 13.74 |
| 0 | 32 | **1420** | 4844 | 1221 | **2.65** | 9.06 | 535 | 3.06 | 16.51 |
| 5 | 41 | **1680** | 5731 | 1445 | **2.96** | 10.08 | 568 | 3.22 | 19.69 |
| 10 | 50 | **1972** | 6728 | 1696 | **3.29** | 11.22 | 600 | 3.39 | 23.32 |

**pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| -25 | -13 | **452** | 1541 | 388 | **1.21** | 4.14 | 373 | 2.49 | 5.66 |
| -20 | -4 | **562** | 1916 | 483 | **1.35** | 4.62 | 415 | 2.65 | 7.07 |
| -15 | 5 | **691** | 2359 | 595 | **1.50** | 5.13 | 460 | 2.81 | 8.74 |
| -10 | 14 | **843** | 2875 | 725 | **1.66** | 5.66 | 508 | 2.99 | 10.72 |
| -5 | 23 | **1017** | 3470 | 875 | **1.83** | 6.23 | 557 | 3.18 | 13.02 |
| 0 | 32 | **1216** | 4150 | 1046 | **2.00** | 6.83 | 608 | 3.39 | 15.69 |
| 5 | 41 | **1442** | 4921 | 1240 | **2.19** | 7.47 | 659 | 3.61 | 18.76 |
| 10 | 50 | **1696** | 5788 | 1459 | **2.39** | 8.15 | 710 | 3.85 | 22.29 |

**Model**
**NLE12.6MN** Configuration 2

Sales code:
**105H6377**

## Configuration

| | |
|---|---|
| Motor configuration | **eRSIR** |
| Power supply (nominal) | **220-240 V/50 Hz 1~** |
| Refrigerant | **R290** |
| Application | **LBP+MBP** |
| Voltage range | **198-254 V** |
| Starting torque | **LST** |
| Approvals | **VDE, CCC, EAC** |
| Starting device type | **e-PTC** |
| Run capacitor | **-/-** |
| Start capacitor | **-/-** |
| LRA (locked rotor amps / 4s/ U(N)) | **15.6 A** |
| RLA (rated load amps / 1s/ U(N)) | **2.7 A** |
| Cut in current (U(N)) | **21.2 A** |

**Ambient/ machine room temperatures minimum /maximum**
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

**System Cooling**
fan 3m/s

## Electrical Accessories / Wiring Diagram

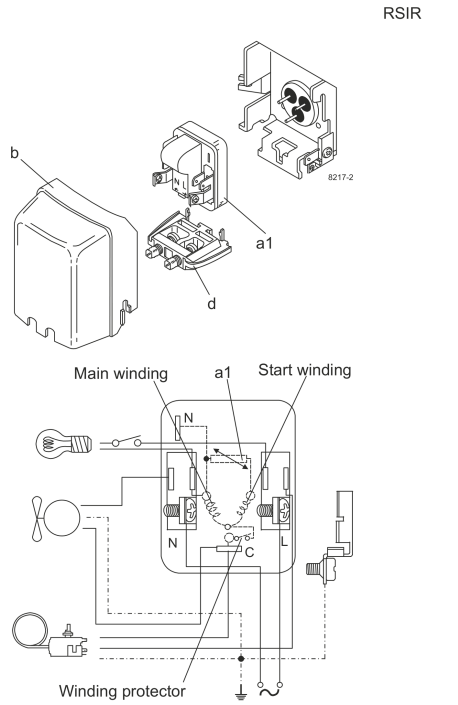


**Components**
**a1** e-PTC starter (220V, 25Ohm, 4.8mm) 103N0050
**b** plastic cover 103N2010
**d** cord relief 103N1010

**Alternative components**
**b** plastic cover 103N2011

## Operation Pressure Range

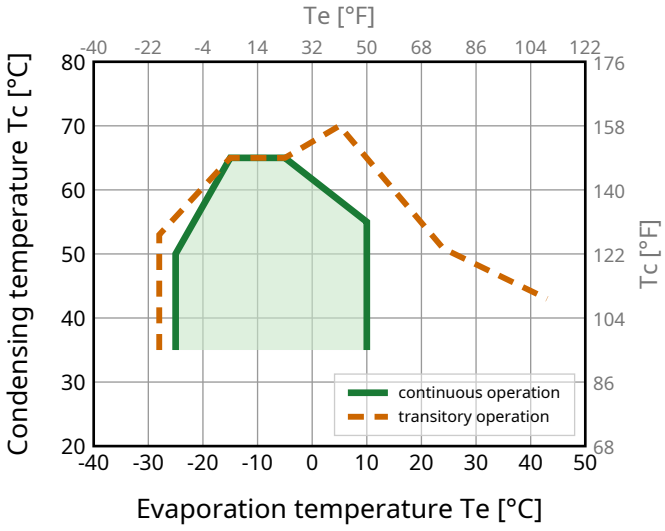


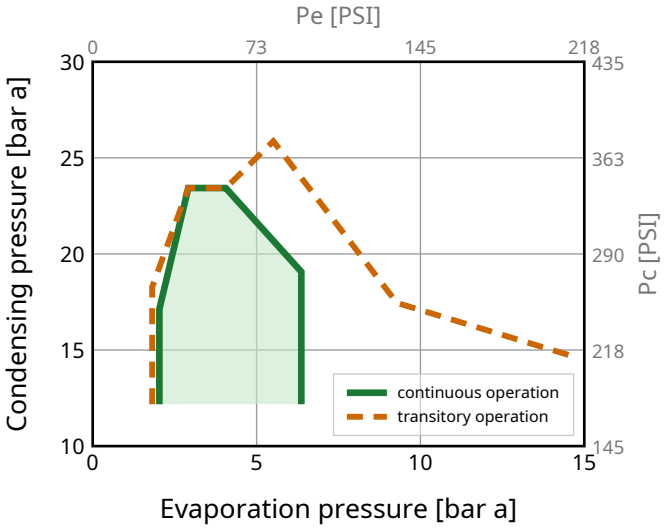

**Model**
**NLE12.6MN** Configuration 2

Sales code:
**105H6377**

## Standard Conditions

**R290**, 220 V/50 Hz, eRSIR, fan 3m/s

| pe | pc | RGT | Tliq | Cooling capacity | | | COP | EER | P | I | ṁ | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| [°C] [°F] | [°C] [°F] | [°C] [°F] | [°C] [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [W] | [A] | [kg/h] | |
| -23.3 -10 | 54.4 129.9 | 32.2 90 | 32.2 90 | **604** | 2060 | 519 | **1.57** | 5.34 | 386 | 2.54 | 6.13 | **ASHRAE LBP** |
| -25 -13 | 55 131 | 32 89.6 | 55 131 | **452** | 1541 | 388 | **1.21** | 4.14 | 373 | 2.49 | 5.66 | **CECOMAF LBP** |
| -35 -31 | 40 104 | 20 68 | 40 104 | **362** | 1237 | 312 | **1.33** | 4.54 | 272 | 2.14 | 4.16 | **EN12900 LBP** |
| -6.7 20 | 54.4 129.9 | 35 95 | 46.1 115 | **1061** | 3619 | 912 | **1.98** | 6.74 | 537 | 3.10 | 12.14 | **ASHRAE MBP** |
| -10 14 | 55 131 | 32 89.6 | 55 131 | **843** | 2875 | 725 | **1.66** | 5.66 | 508 | 2.99 | 10.72 | **CECOMAF MBP** |
| -10 14 | 45 113 | 20 68 | 45 113 | **950** | 3242 | 817 | **2.06** | 7.01 | 462 | 2.77 | 11.70 | **EN12900 MBP** |

## Performance Tables

**R290**, 220 V/50 Hz, eRSIR, fan 3m/s

**pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F**

| pe | | Cooling capacity | | | COP | EER | P | I | ṁ |
|---|---|---|---|---|---|---|---|---|---|
| [°C] | [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [W] | [A] | [kg/h] |
| -25 | -13 | **536** | 1830 | 461 | **1.53** | 5.21 | 352 | 2.41 | 6.08 |
| -20 | -4 | **663** | 2262 | 570 | **1.71** | 5.83 | 388 | 2.52 | 7.54 |
| -15 | 5 | **813** | 2774 | 699 | **1.91** | 6.52 | 425 | 2.65 | 9.29 |
| -10 | 14 | **988** | 3371 | 850 | **2.14** | 7.29 | 462 | 2.77 | 11.34 |
| -5 | 23 | **1190** | 4059 | 1023 | **2.38** | 8.13 | 499 | 2.91 | 13.74 |
| 0 | 32 | **1420** | 4844 | 1221 | **2.65** | 9.06 | 535 | 3.06 | 16.51 |
| 5 | 41 | **1680** | 5731 | 1445 | **2.96** | 10.08 | 568 | 3.22 | 19.69 |
| 10 | 50 | **1972** | 6728 | 1696 | **3.29** | 11.22 | 600 | 3.39 | 23.32 |

**pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| -25 | -13 | **452** | 1541 | 388 | **1.21** | 4.14 | 373 | 2.49 | 5.66 |
| -20 | -4 | **562** | 1916 | 483 | **1.35** | 4.62 | 415 | 2.65 | 7.07 |
| -15 | 5 | **691** | 2359 | 595 | **1.50** | 5.13 | 460 | 2.81 | 8.74 |
| -10 | 14 | **843** | 2875 | 725 | **1.66** | 5.66 | 508 | 2.99 | 10.72 |
| -5 | 23 | **1017** | 3470 | 875 | **1.83** | 6.23 | 557 | 3.18 | 13.02 |
| 0 | 32 | **1216** | 4150 | 1046 | **2.00** | 6.83 | 608 | 3.39 | 15.69 |
| 5 | 41 | **1442** | 4921 | 1240 | **2.19** | 7.47 | 659 | 3.61 | 18.76 |
| 10 | 50 | **1696** | 5788 | 1459 | **2.39** | 8.15 | 710 | 3.85 | 22.29 |

**Model**
**NLE12.6MN** Configuration 3

Sales code:
**105H6377**

## Configuration

| | |
|---|---|
| Motor configuration | **eRSCR** |
| Power supply (nominal) | **220-240 V/50 Hz 1~** |
| Refrigerant | **R290** |
| Application | **LBP+MBP** |
| Voltage range | **198-254 V** |
| Starting torque | **LST** |
| Approvals | **VDE, CCC, EAC** |
| Starting device type | **e-PTC** |
| Run capacitor | **4 µF** |
| Start capacitor | **-/-** |
| LRA (locked rotor amps / 4s/ U(N)) | **15.6 A** |
| RLA (rated load amps / 1s/ U(N)) | **2.7 A** |
| Cut in current (U(N)) | **21.2 A** |

**Ambient/ machine room temperatures minimum /maximum**
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

**System Cooling**
fan 3m/s

## Electrical Accessories / Wiring Diagram

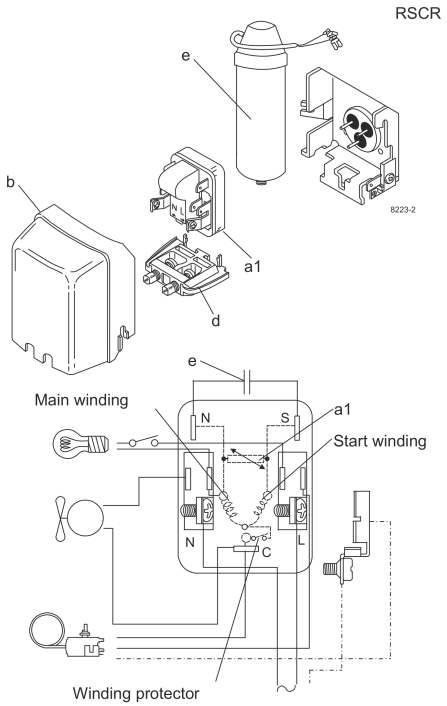


**Components**
**a1** e-PTC starter (220V, 25Ohm, 4.8mm) 103N0050
**e** run capacitor (4µF, 4.8mm) 117-7119
**b** plastic cover 103N2010
**d** cord relief 103N1010
bracket for run capacitor 117-0300
screw M4x8mm 117-0301

**Alternative components**
**b** plastic cover 103N2011

## Operation Pressure Range

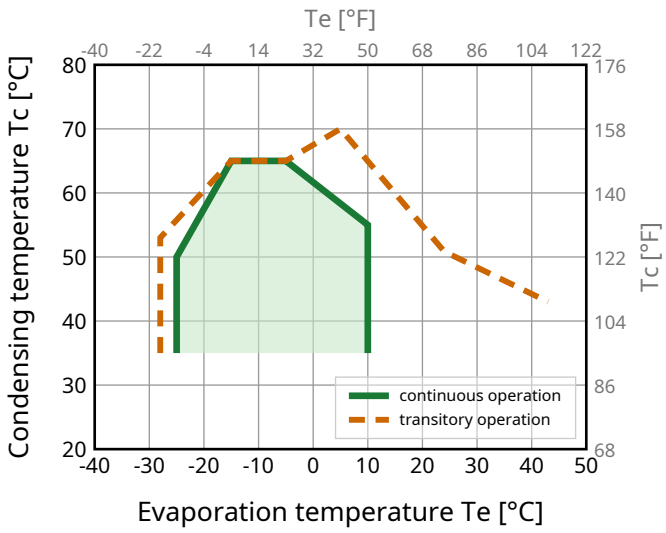


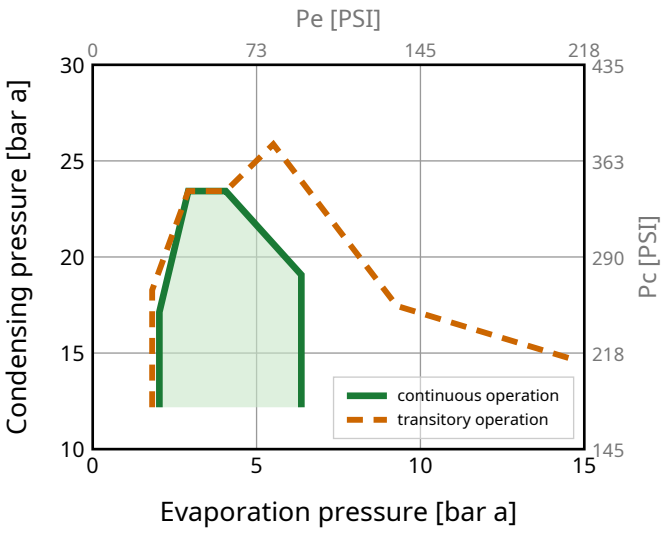

**Model**
**NLE12.6MN** Configuration 3

Sales code:
**105H6377**

## Standard Conditions

**R290**, 220 V/50 Hz, eRSCR, fan 3m/s

| pe | pc | RGT | Tliq | Cooling capacity | | | COP | EER | P | I | ṁ | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| [°C] [°F] | [°C] [°F] | [°C] [°F] | [°C] [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [W] | [A] | [kg/h] | |
| -23.3 -10 | 54.4 129.9 | 32.2 90 | 32.2 90 | **607** | 2072 | 522 | **1.64** | 5.61 | 370 | 2.21 | 6.17 | **ASHRAE LBP** |
| -25 -13 | 55 131 | 32 89.6 | 55 131 | **454** | 1549 | 391 | **1.27** | 4.34 | 357 | 2.17 | 5.69 | **CECOMAF LBP** |
| -35 -31 | 40 104 | 20 68 | 40 104 | **364** | 1243 | 313 | **1.41** | 4.81 | 258 | 1.83 | 4.18 | **EN12900 LBP** |
| -6.7 20 | 54.4 129.9 | 35 95 | 46.1 115 | **1070** | 3652 | 920 | **2.09** | 7.12 | 513 | 2.78 | 12.25 | **ASHRAE MBP** |
| -10 14 | 55 131 | 32 89.6 | 55 131 | **850** | 2899 | 731 | **1.75** | 5.97 | 486 | 2.67 | 10.81 | **CECOMAF MBP** |
| -10 14 | 45 113 | 20 68 | 45 113 | **958** | 3269 | 824 | **2.17** | 7.39 | 442 | 2.49 | 11.79 | **EN12900 MBP** |

## Performance Tables

**R290**, 220 V/50 Hz, eRSCR, fan 3m/s

**pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F**

| pe | | Cooling capacity | | | COP | EER | P | I | ṁ |
|---|---|---|---|---|---|---|---|---|---|
| [°C] | [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [W] | [A] | [kg/h] |
| -25 | -13 | **539** | 1840 | 464 | **1.60** | 5.46 | 337 | 2.10 | 6.11 |
| -20 | -4 | **667** | 2277 | 574 | **1.79** | 6.12 | 372 | 2.22 | 7.59 |
| -15 | 5 | **819** | 2795 | 704 | **2.01** | 6.86 | 408 | 2.35 | 9.36 |
| -10 | 14 | **996** | 3399 | 857 | **2.25** | 7.68 | 442 | 2.49 | 11.44 |
| -5 | 23 | **1200** | 4095 | 1032 | **2.52** | 8.59 | 477 | 2.62 | 13.86 |
| 0 | 32 | **1433** | 4890 | 1232 | **2.81** | 9.60 | 509 | 2.76 | 16.66 |
| 5 | 41 | **1696** | 5787 | 1459 | **3.14** | 10.71 | 540 | 2.89 | 19.88 |
| 10 | 50 | **1991** | 6795 | 1713 | **3.50** | 11.95 | 569 | 3.01 | 23.55 |

**pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| -25 | -13 | **454** | 1549 | 391 | **1.27** | 4.34 | 357 | 2.17 | 5.69 |
| -20 | -4 | **565** | 1929 | 486 | **1.42** | 4.85 | 398 | 2.32 | 7.12 |
| -15 | 5 | **697** | 2377 | 599 | **1.58** | 5.39 | 441 | 2.49 | 8.81 |
| -10 | 14 | **850** | 2899 | 731 | **1.75** | 5.97 | 486 | 2.67 | 10.81 |
| -5 | 23 | **1026** | 3502 | 883 | **1.93** | 6.58 | 532 | 2.86 | 13.14 |
| 0 | 32 | **1228** | 4190 | 1056 | **2.12** | 7.24 | 579 | 3.06 | 15.84 |
| 5 | 41 | **1456** | 4970 | 1253 | **2.33** | 7.94 | 626 | 3.27 | 18.95 |
| 10 | 50 | **1714** | 5846 | 1474 | **2.55** | 8.69 | 673 | 3.49 | 22.52 |

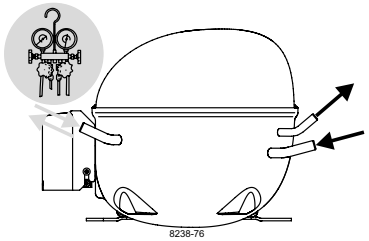


# NL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

## RSIR







## CSIR

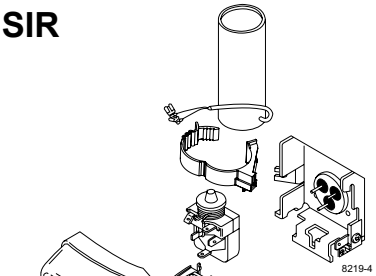


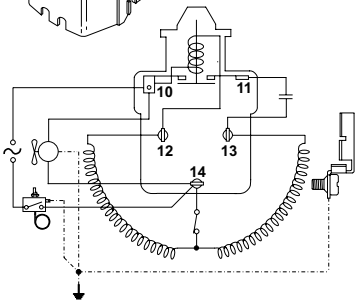


## RSCR

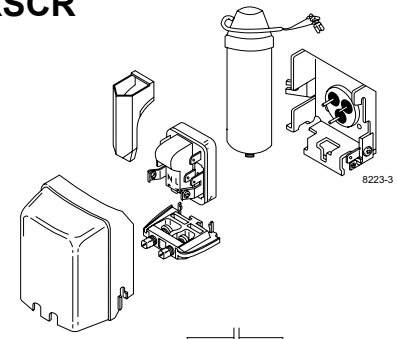




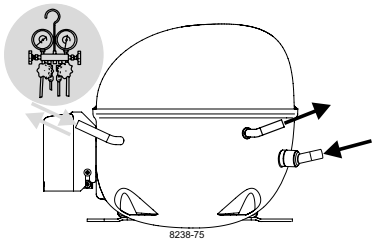


# NL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

## Service/Repair – R290, R600a, R170, R1270, R1234yf

(applies to all flammable refrigerants)

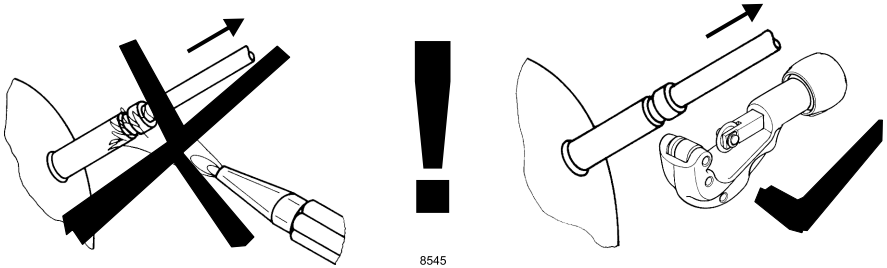


## Brazing on Suction Connectors (Direct Intake)

representative image

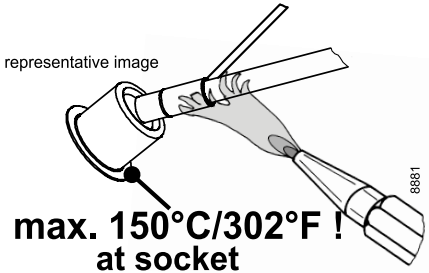


**! max. 150°C/302°F ! at socket**

brazing solder: phosphor (LP7) or silver

Refer to Product Bulletin:
**Brazing on Suction Connectors (Compressors with Direct Suction Intake)**

**Dismantling, recycling, disposal:** At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.secop.com**