Singolo
Imballi

Single Pack NL8.4FT 220-240V 50Hz RSIR

Codice Imballo Singolo: **195B4219**

Posizione	Titolo	Codice	Quantità
1	Compressor NL8.4FT	105G6865	1
2	PTC starting device (220V, 250hm, 4.8mm)	103N0018	1
3	Protection screen for PTC	103N0476	1
4	Cord relief	103N1010	1
5	Cover	103N2010	1
6	Bolt joint for one compressor | M6 | ø16mm	118-1917	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • **www.secop.com**

Secop non si assume alcuna responsabilità per eventuali errori presenti in cataloghi, brochure e altro materiale stampato. Secop si riserva il diritto di modificare i propri prodotti senza preavviso. Ciò vale anche per i prodotti già ordinati, a condizione che tali modifiche possano essere apportate senza che siano necessarie modifiche successive alle specifiche già concordate. Tutti i marchi presenti in questo materiale sono di proprietà delle rispettive aziende. Secop e il logo Secop sono marchi di Secop GmbH. Tutti i diritti sono riservati.

Model
NL8.4FT

Sales code:
105G6865

Compressor Data

Refrigerant(s)	**R134a**
Refr. charge - tech. limit	**400g / 14.11oz**
Weight	**9.60 kg / 21.16lbs**
Displacement	**8.35 cm3 / 0.51cu.in**
Compressors on pallet	**80**

General – Configurations With NL8.4FT

–	**Conf. 1**	**Conf. 2**
Motor configuration	CSIR	RSIR
Power supply (nominal)	220-240 V/50 Hz	220-240 V/50 Hz
Number of phases	1	1
Voltage range	187-254 V	187-254 V
Approvals	VDE, CCC, EAC	VDE, CCC, EAC
Starting torque	HST	LST
Refrigerant	R134a	R134a
Application	LBP	LBP

Application Notes

- Provision for PE Grounding is located at the PE Stamp on the compressor

Model
NL8.4FT

Sales code:
105G6865

Compressor Design

Oil type	**POE**	Winding resistance main	**10.6 Ohm**
Oil viscosity	**32cSt**	Winding resistance aux	**18.1 Ohm**
Oil quantity	**268 / 9.06fl.oz**	Max. winding temp.	**125 °C**
Free gas volume comp.	**2,360 cm3 / 79.80fl.oz**	Max. discharge temp.	**130°C / 266°F**
Motor protection	**internal**		

Compressor Dimensions

Housing

A Height	**189.5mm / 7.46in**
B Height	**183.5mm / 7.22in**
C Length shell	**205mm / 8.07in**
D Length w. cover	**254mm / 10.00in**
E Width	**166mm / 6.54in**

Find 3D Model here



Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 6.11–6.29 / 0.24–0.25in	øi 5.12–5.22 / 0.20–0.21in	øi 6.11–6.29 / 0.24–0.25in
Material	CU	CU	CU
Horizontal angle ±2°	0°	0°	0°
Vertical angle ±2°	15°	35°	155°
Position l/h/w [mm]	125.5/75.5/78 / 4.94/2.97/3.07in	133/102.5/54 / 5.24/4.04/2.13in	-107/93.5/72 / -4.21/3.68/2.83in
Straight tube l. [mm]	12 / 0.47in	12 / 0.47in	12 / 0.47in

Mounting Accessories

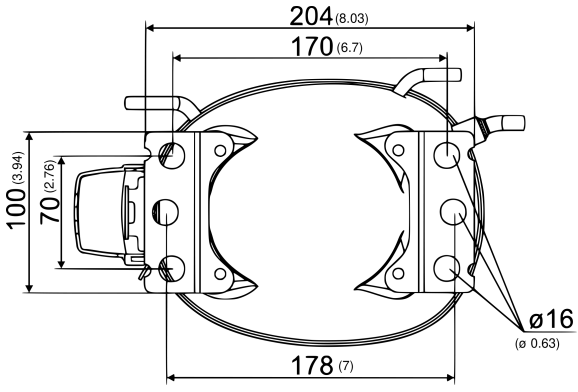

Dimensions in mm [in]

Bolt joint



Snap-on



	one comp.	multi pack
Bolt joint | M6 | ø16mm	118-1917	118-1918
Bolt joint | ø1/4" | ø16mm	118-1946	–
Snap-on | ø7,3 | ø16mm	118-1947	118-1919

Model
NL8.4FT Configuration 1

Sales code:
105G6865

Configuration

Motor configuration	**CSIR**
Power supply (nominal)	**220-240 V/50 Hz 1~**
Refrigerant	**R134a**
Application	**LBP**
Voltage range	**187-254 V**
Starting torque	**HST**
Approvals	**VDE, CCC, EAC**
Starting device type	**relay**
Run capacitor	**-/-**
Start capacitor	**80 µF**
LRA (locked rotor amps / 4s/ U(N))	**9.4 A**
RLA (rated load amps / 1s/ U(N))	**1.4 A**
Cut in current (U(N))	**11.6 A**

Ambient/ machine room temperatures minimum /maximum
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling
static

Electrical Accessories / Wiring Diagram

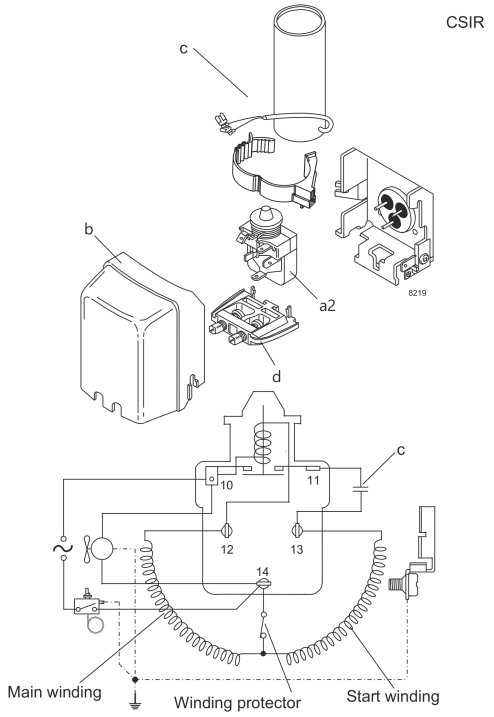

View full size

Components
a2 current relay 117U6001
c start capacitor (80µF) 117U5015
b plastic cover 103N2010
d cord relief 103N1010

Alternative components
b plastic cover 103N2011

Operation Pressure Range

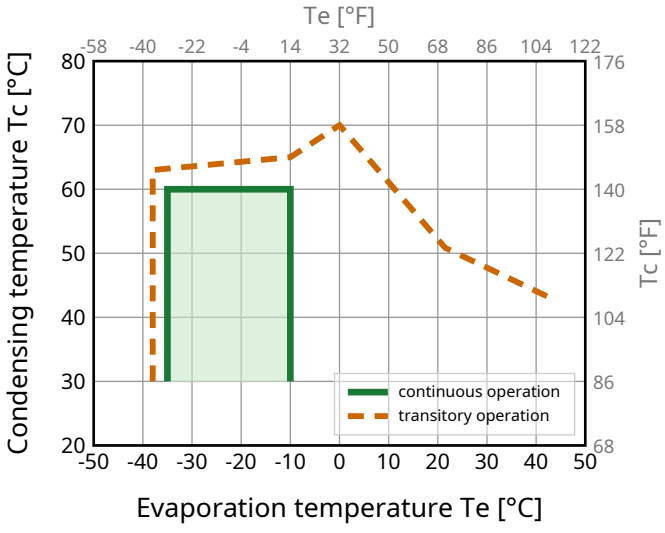

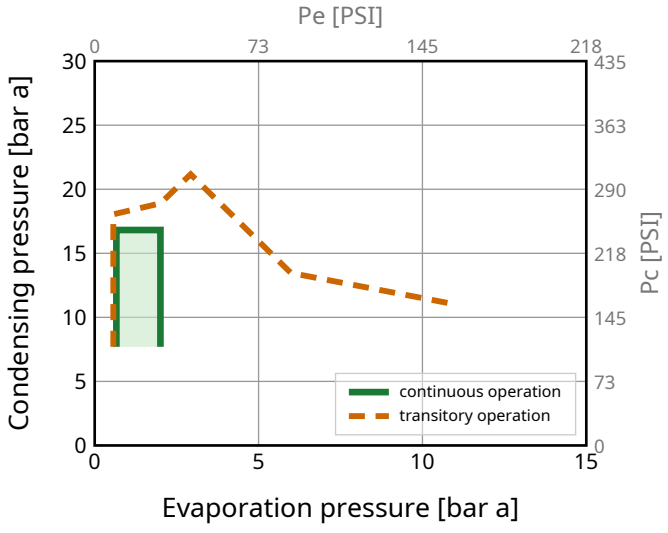

Model
NL8.4FT Configuration 1

Sales code:
105G6865

Standard Conditions

R134a, 220 V/50 Hz, CSIR, static

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	ṁ	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	**219**	748	189	**1.23**	4.20	178	1.30	4.25	**ASHRAE LBP**
-25 -13	55 131	32 89.6	55 131	**162**	551	139	**0.95**	3.25	170	1.28	3.85	**CECOMAF LBP**
-35 -31	40 104	20 68	40 104	**115**	391	99	**0.91**	3.10	126	1.18	2.51	**EN12900 LBP**
-23.3 -10	48.8 119.8	4.4 39.9	48.8 119.8	**182**	620	156	**1.03**	3.50	177	1.30	4.76	**ARI540 LBP**
-23.3 -10	40.6 105.1	32.2 90	32.2 90	**246**	839	211	**1.43**	4.88	172	1.29	4.77	**AHAM LBP**
-35 -31	45 113	32 89.6	45 113	**107**	366	92	**0.84**	2.88	127	1.19	2.31	**opt LBP**

Performance Tables

R134a, 220 V/50 Hz, CSIR, static

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	ṁ
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	**107**	366	92	**0.84**	2.88	127	1.19	2.31
-30	-22	**146**	497	125	**1.00**	3.41	146	1.23	3.14
-25	-13	**194**	661	167	**1.16**	3.95	167	1.28	4.19
-20	-4	**253**	863	217	**1.33**	4.54	190	1.34	5.48
-15	5	**324**	1106	279	**1.51**	5.16	214	1.42	7.05
-10	14	**409**	1396	352	**1.71**	5.84	239	1.51	8.93

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	**87**	297	75	**0.69**	2.34	127	1.18	2.06
-30	-22	**120**	409	103	**0.82**	2.79	146	1.22	2.85
-25	-13	**162**	551	139	**0.95**	3.25	170	1.28	3.85
-20	-4	**213**	726	183	**1.09**	3.72	195	1.36	5.09
-15	5	**275**	939	237	**1.24**	4.22	223	1.45	6.61
-10	14	**350**	1194	301	**1.39**	4.75	252	1.55	8.44

Model
NL8.4FT Configuration 2

Sales code:
105G6865

Configuration

Motor configuration	**RSIR**
Power supply (nominal)	**220-240 V/50 Hz 1~**
Refrigerant	**R134a**
Application	**LBP**
Voltage range	**187-254 V**
Starting torque	**LST**
Approvals	**VDE, CCC, EAC**
Starting device type	**PTC**
Run capacitor	**-/-**
Start capacitor	**-/-**
LRA (locked rotor amps / 4s/ U(N))	**9.4 A**
RLA (rated load amps / 1s/ U(N))	**1.4 A**
Cut in current (U(N))	**11.6 A**

Ambient/ machine room temperatures minimum /maximum
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling
static

Electrical Accessories / Wiring Diagram

RSIR

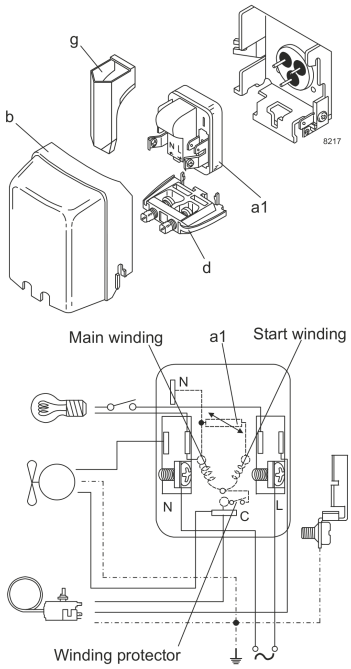

View full size

Components
a1 PTC starter (220V, 25Ohm, 4.8mm) 103N0018
b plastic cover 103N2010
d cord relief 103N1010
g protection screen for PTC 103N0476

Alternative components
a1 PTC starter (220V, 25Ohm, 6.3mm) 103N0011
b plastic cover 103N2011

Operation Pressure Range

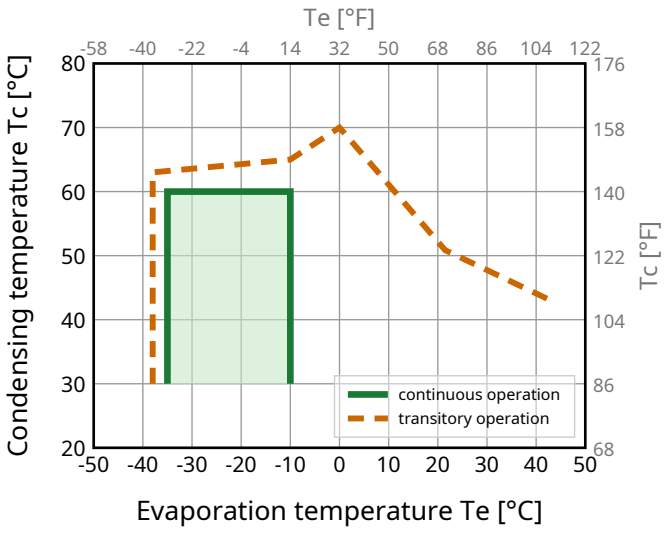

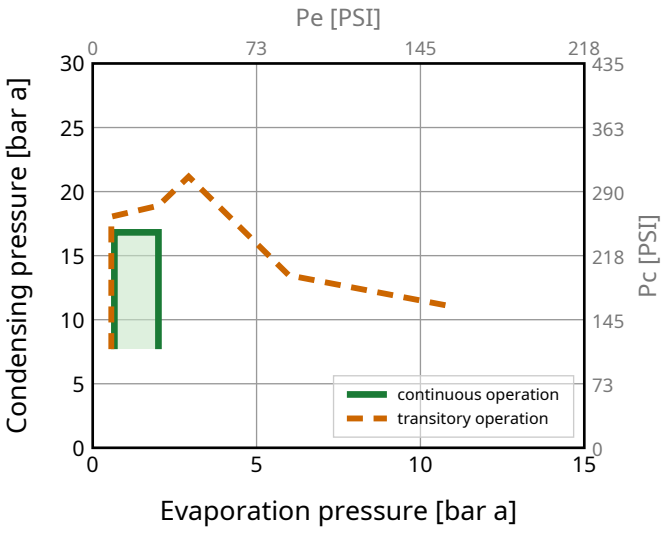

Model

NL8.4FT Configuration 2

Sales code:

105G6865

Standard Conditions

R134a, 220 V/50 Hz, RSIR, static

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	ṁ	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	**219**	748	189	**1.23**	4.20	178	1.30	4.25	**ASHRAE LBP**
-25 -13	55 131	32 89.6	55 131	**162**	551	139	**0.95**	3.25	170	1.28	3.85	**CECOMAF LBP**
-35 -31	40 104	20 68	40 104	**115**	391	99	**0.91**	3.10	126	1.18	2.51	**EN12900 LBP**
-23.3 -10	48.8 119.8	4.4 39.9	48.8 119.8	**182**	620	156	**1.03**	3.50	177	1.30	4.76	**ARI540 LBP**
-23.3 -10	40.6 105.1	32.2 90	32.2 90	**246**	839	211	**1.43**	4.88	172	1.29	4.77	**AHAM LBP**
-35 -31	45 113	32 89.6	45 113	**107**	366	92	**0.84**	2.88	127	1.19	2.31	**opt LBP**

Performance Tables

R134a, 220 V/50 Hz, RSIR, static

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	ṁ
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	**107**	366	92	**0.84**	2.88	127	1.19	2.31
-30	-22	**146**	497	125	**1.00**	3.41	146	1.23	3.14
-25	-13	**194**	661	167	**1.16**	3.95	167	1.28	4.19
-20	-4	**253**	863	217	**1.33**	4.54	190	1.34	5.48
-15	5	**324**	1106	279	**1.51**	5.16	214	1.42	7.05
-10	14	**409**	1396	352	**1.71**	5.84	239	1.51	8.93

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	**87**	297	75	**0.69**	2.34	127	1.18	2.06
-30	-22	**120**	409	103	**0.82**	2.79	146	1.22	2.85
-25	-13	**162**	551	139	**0.95**	3.25	170	1.28	3.85
-20	-4	**213**	726	183	**1.09**	3.72	195	1.36	5.09
-15	5	**275**	939	237	**1.24**	4.22	223	1.45	6.61
-10	14	**350**	1194	301	**1.39**	4.75	252	1.55	8.44

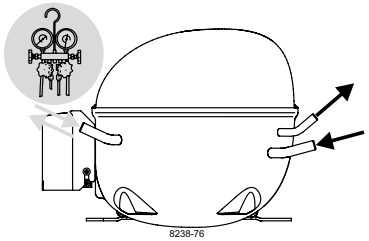

NL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

RSIR





CSIR

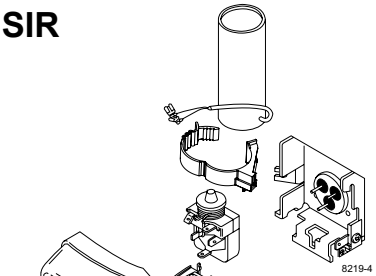

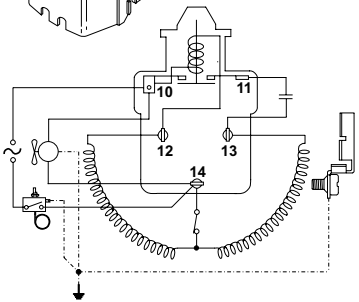

RSCR

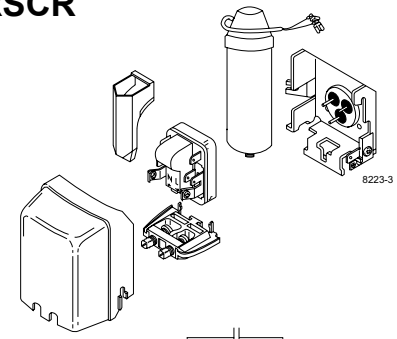



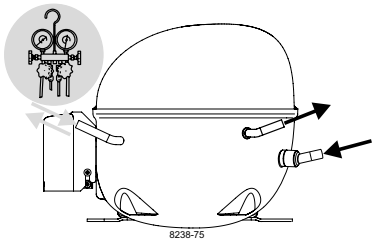

NL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf

(applies to all flammable refrigerants)

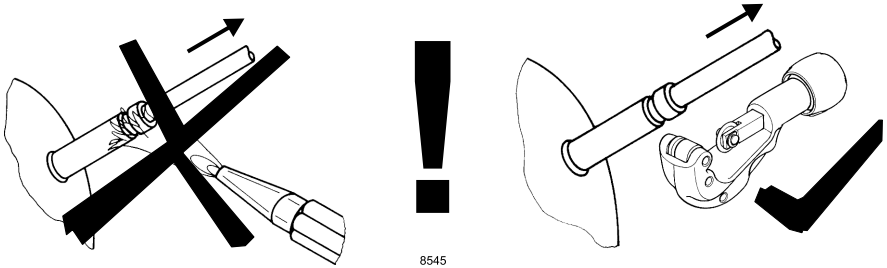

Brazing on Suction Connectors (Direct Intake)

representative image

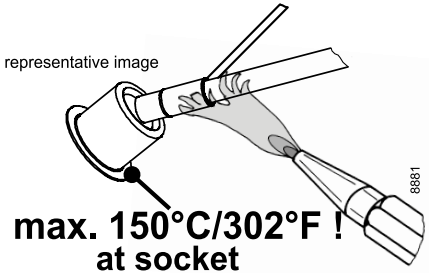

! max. 150°C/302°F ! at socket

brazing solder: phosphor (LP7) or silver

Refer to Product Bulletin:
Brazing on Suction Connectors (Compressors with Direct Suction Intake)

Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.secop.com**