Singolo
Imballi

# Single Pack SCE18MNX 208-230V 60Hz CSCR

Codice Imballo Singolo: **195B4437**

| Posizione | Titolo | Codice | Quantità |
|---|---|---|---|
| 1 | Compressor SCE18MNX | 104H8879 | 1 |
| 2 | SC starting device (550mm) | 117-7807 | 1 |
| 3 | Bolt joint for one compressor \| M6 \| ø16mm | 118-1917 | 1 |
| **Below electrical equipment is pre-assembled on the compressor:** | | | |
| 4 | Overload protector T0715/46 | 117U3224 | 1 |
| 5 | Protector holder | 117U0080 | 1 |
| 6 | Cover | 117U1021 | 1 |

**Secop GmbH** • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • **www.secop.com**

Secop non si assume alcuna responsabilità per eventuali errori presenti in cataloghi, brochure e altro materiale stampato. Secop si riserva il diritto di modificare i propri prodotti senza preavviso. Ciò vale anche per i prodotti già ordinati, a condizione che tali modifiche possano essere apportate senza che siano necessarie modifiche successive alle specifiche già concordate. Tutti i marchi presenti in questo materiale sono di proprietà delle rispettive aziende. Secop e il logo Secop sono marchi di Secop GmbH. Tutti i diritti sono riservati.

**Model**
**SCE18MNX**

Sales code:
**104H8879**

## Compressor Data

| | |
|---|---|
| Refrigerant(s) | **R290** |
| Refr. charge - tech. limit | **450g / 15.87oz** |
| Weight | **14.20 kg / 31.31lbs** |
| Displacement | **17.69 cm3 / 1.08cu.in** |
| Compressors on pallet | **80** |

## General – Configurations With SCE18MNX

| – | **Conf. 1** |
|---|---|
| Motor configuration | CSCR |
| Power supply (nominal) | 208-230 V/60 Hz |
| Number of phases | 1 |
| Voltage range | 187-253 V |
| Approvals | UL |
| Starting torque | HST |
| Refrigerant | R290 |
| Application | MBP |
| Hot gas defrost | OK |
| Long interval pull down | OK |

## Application Notes

- Protector and cover are included and pre-assembled to compressor.
- Provision for PE Grounding is located at the PE Stamp on the compressor

**Model**
**SCE18MNX**

Sales code:
**104H8879**

## Compressor Design

| | | | |
|---|---|---|---|
| Oil type | **POE** | Winding resistance main | **2.58 Ohm** |
| Oil viscosity | **32cSt** | Winding resistance aux | **9.77 Ohm** |
| Oil quantity | **550 / 18.60fl.oz** | Max. winding temp. | **125 °C** |
| Free gas volume comp. | **1,460 cm3 / 49.37fl.oz** | Max. discharge temp. | **135°C / 275°F** |
| Motor protection | **external** | | |

## Compressor Dimensions

**Housing**

| | |
|---|---|
| A Height | **219mm / 8.62in** |
| B Height | **213mm / 8.39in** |
| C Length shell | **218mm / 8.58in** |
| D Length w. cover | **255mm / 10.04in** |
| E Width | **151mm / 5.94in** |

Find 3D Model here




| Connectors | Suction X | Discharge Y | Process Z |
|---|---|---|---|
| Diameter [mm] | øi 9.54–9.72 / 0.38–0.38in | øi 6.41–6.59 / 0.25–0.26in | øi 6.41–6.59 / 0.25–0.26in |
| Material | CU | CU | CU |
| Horizontal angle ±2° | 37° | 37° | 143° |
| Vertical angle ±2° | 30° | 0° | 150° |
| Position l/h/w [mm] | 107/193/55 / 4.21/7.60/2.17in | 115/110/63 / 4.53/4.33/2.48in | -107/193/55 / -4.21/7.60/2.17in |
| Straight tube l. [mm] | 12 / 0.47in | 12 / 0.47in | 12 / 0.47in |

## Mounting Accessories

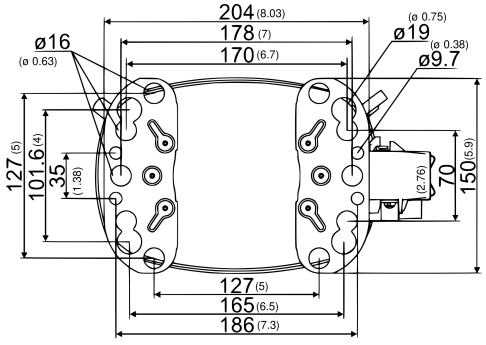


Dimensions in mm [in]

Bolt joint




Snap-on




| | one comp. | multi pack |
|---|---|---|
| Bolt joint \| M6 \| ø16mm | 118-1917 | 118-1918 |
| Bolt joint \| ø1/4" \| ø16mm | 118-1946 | – |
| Bolt joint \| ø1/4" \| ø19mm | 118-1949 | – |
| Snap-on \| ø7,3 \| ø16mm | 118-1947 | 118-1919 |

**Model**
**SCE18MNX** Configuration 1

Sales code:
**104H8879**

## Configuration

| | |
|---|---|
| Motor configuration | **CSCR** |
| Power supply (nominal) | **208-230 V/60 Hz 1~** |
| Refrigerant | **R290** |
| Application | **MBP** |
| Voltage range | **187-253 V** |
| Starting torque | **HST** |
| Approvals | **UL** |
| Starting device type | **relay** |
| Run capacitor | **10 µF** |
| Start capacitor | **80 µF** |
| LRA (locked rotor amps / 4s/ U(N)) | **25.5 A** |
| RLA (rated load amps / 1s/ U(N)) | **5.21 A** |
| Cut in current (U(N)) | **25.5 A** |

**Ambient/ machine room temperatures minimum /maximum**
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

**System Cooling**
fan 3m/s

## Electrical Accessories / Wiring Diagram

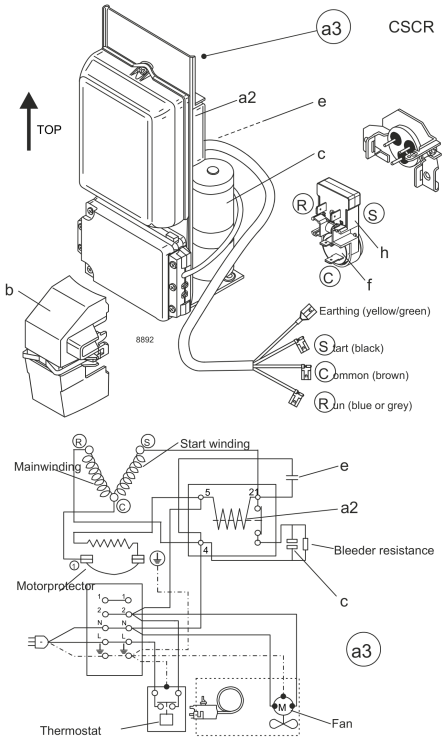


**Components (protector + ~holder + cover: pre assembled)**
**a3** SC starter kit (550mm) 117-7807
**f / h** motor protector assy. (T0715) 117U8003
**b** plastic cover + clamp 117U1021

**Alternative components**
**a2** potential relay (RVA 2GR134) 117-7445
**e** run capacitor (10µF, 6.3mm) 117-7121
**c** start capacitor (80µF) 117U5373

## Operation Pressure Range

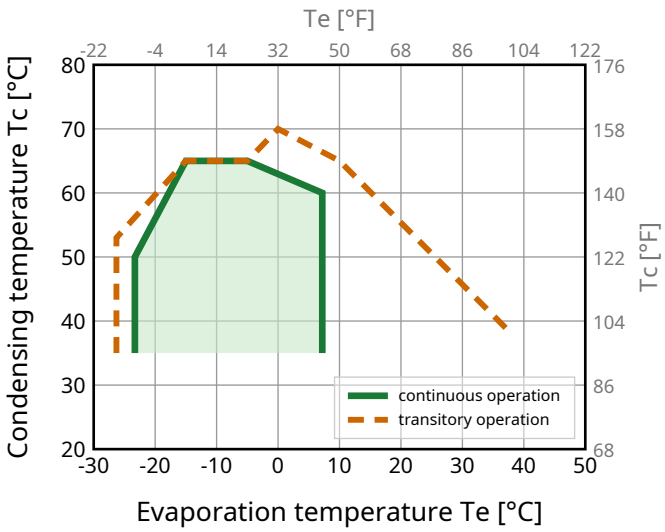


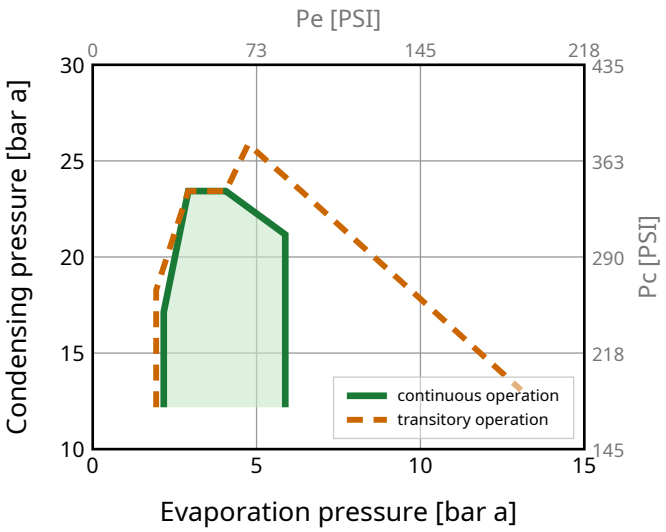

**Model**

**SCE18MNX** Configuration 1

Sales code:

**104H8879**

## Standard Conditions

**R290**, 230 V/60 Hz, CSCR, fan 3m/s

| pe | pc | RGT | Tliq | Cooling capacity | | | COP | EER | P | I | ṁ | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| [°C] [°F] | [°C] [°F] | [°C] [°F] | [°C] [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [W] | [A] | [kg/h] | |
| -6.7 20 | 54.4 129.9 | 35 95 | 46.1 115 | **1804** | 6154 | 1551 | **2.21** | 7.53 | 817 | 3.97 | 20.65 | **ASHRAE MBP** |
| -10 14 | 55 131 | 32 89.6 | 55 131 | **1425** | 4863 | 1226 | **1.84** | 6.27 | 776 | 3.81 | 18.13 | **CECOMAF MBP** |
| -10 14 | 45 113 | 20 68 | 45 113 | **1596** | 5447 | 1373 | **2.19** | 7.47 | 730 | 3.56 | 19.65 | **EN12900 MBP** |
| -6.7 20 | 48.8 119.8 | 18.3 64.9 | 48.8 119.8 | **1700** | 5800 | 1462 | **2.16** | 7.37 | 787 | 3.81 | 22.10 | **ARI540 MBP** |
| -10 14 | 45 113 | 32 89.6 | 45 113 | **1660** | 5663 | 1427 | **2.27** | 7.76 | 730 | 3.56 | 19.06 | **opt MBP 1** |
| -25 -13 | 45 113 | 32 89.6 | 45 113 | **850** | 2901 | 731 | **1.55** | 5.30 | 548 | 2.83 | 9.64 | **opt MBP 2** |

## Performance Tables

**R290**, 230 V/60 Hz, CSCR, fan 3m/s

**pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F**

| pe | | Cooling capacity | | | COP | EER | P | I | ṁ |
|---|---|---|---|---|---|---|---|---|---|
| [°C] | [°F] | [W] | [Btu/h] | [kcal/h] | [W/W] | [Btu/Wh] | [W] | [A] | [kg/h] |
| -23.3 | -10 | **931** | 3178 | 801 | **1.64** | 5.58 | 569 | 2.92 | 10.57 |
| -20 | -4 | **1096** | 3738 | 942 | **1.79** | 6.11 | 612 | 3.09 | 12.46 |
| -15 | 5 | **1364** | 4654 | 1173 | **2.02** | 6.91 | 674 | 3.34 | 15.58 |
| -10 | 14 | **1660** | 5663 | 1427 | **2.27** | 7.76 | 730 | 3.56 | 19.06 |
| -5 | 23 | **1988** | 6783 | 1710 | **2.56** | 8.73 | 777 | 3.74 | 22.96 |
| 0 | 32 | **2353** | 8028 | 2023 | **2.90** | 9.90 | 811 | 3.86 | 27.36 |
| 5 | 41 | **2759** | 9415 | 2373 | **3.33** | 11.37 | 828 | 3.91 | 32.34 |
| 7.2 | 45 | **2952** | 10074 | 2539 | **3.56** | 12.14 | 830 | 3.91 | 34.73 |

**pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| -23.3 | -10 | **757** | 2582 | 651 | **1.30** | 4.44 | 581 | 3.02 | 9.50 |
| -20 | -4 | **906** | 3093 | 780 | **1.44** | 4.91 | 631 | 3.22 | 11.41 |
| -15 | 5 | **1152** | 3932 | 991 | **1.64** | 5.58 | 705 | 3.52 | 14.58 |
| -10 | 14 | **1425** | 4863 | 1226 | **1.84** | 6.27 | 776 | 3.81 | 18.13 |
| -5 | 23 | **1730** | 5901 | 1487 | **2.06** | 7.02 | 840 | 4.06 | 22.14 |
| 0 | 32 | **2070** | 7062 | 1780 | **2.31** | 7.90 | 894 | 4.26 | 26.69 |
| 5 | 41 | **2451** | 8361 | 2108 | **2.62** | 8.95 | 934 | 4.40 | 31.88 |
| 7.2 | 45 | **2632** | 8981 | 2264 | **2.78** | 9.49 | 947 | 4.44 | 34.39 |

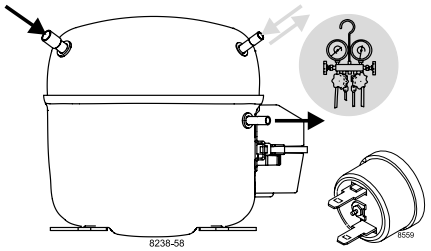


# SCE Compressors
## (External Protector)

SECOP

Keep electrical equipment clear from <u>oil, chemicals, and water</u>

When operated with a <u>flammable refrigerant,</u> only <u>spark-proof starting equipment</u> is allowed.

## CSIR

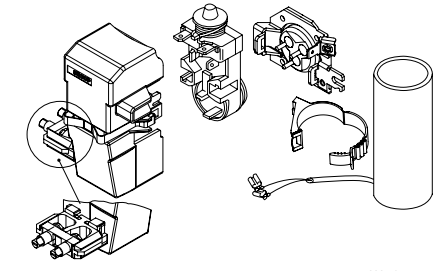


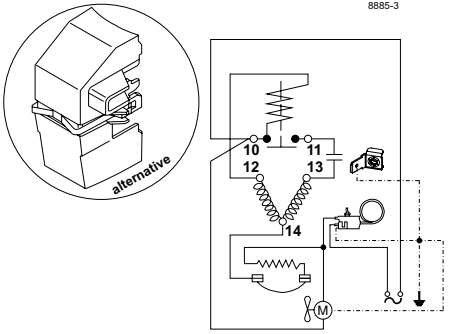


## CSCR

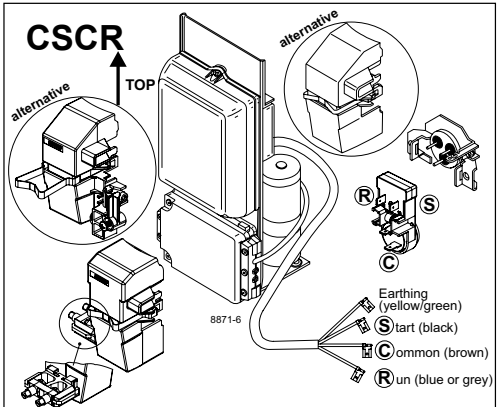





| | S | C | R |
|---|---|---|---|
| ENGLISH | Black | Brown | Blue or grey |
| DEUTSCH | Schwarz | Braun | Blau od. grau |
| FRANÇAIS | Noir | Marron | Bleu ou gris |
| ESPAÑOL | Negro | Marrón | Azul o gris |
| ITALIANO | Nero | Marrone | Blu o grigio |
| NEDERLANDS | Zwart | Bruin | Blauw of grijs |
| РУССКИЙ | Чёрный | Корич-невый | Синий или серый |
| 中文 | 黑色 | 棕色 | 蓝色或灰色 |

## CSCR

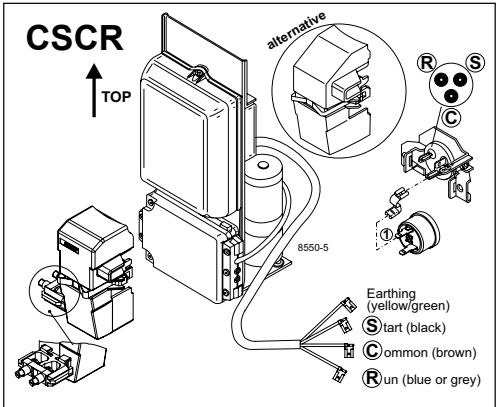





| | S | C | R |
|---|---|---|---|
| ENGLISH | Black | Brown | Blue or grey |
| DEUTSCH | Schwarz | Braun | Blau od. grau |
| FRANÇAIS | Noir | Marron | Bleu ou gris |
| ESPAÑOL | Negro | Marrón | Azul o gris |
| ITALIANO | Nero | Marrone | Blu o grigio |
| NEDERLANDS | Zwart | Bruin | Blauw of grijs |
| РУССКИЙ | Чёрный | Корич-невый | Синий или серый |
| 中文 | 黑色 | 棕色 | 蓝色或灰色 |

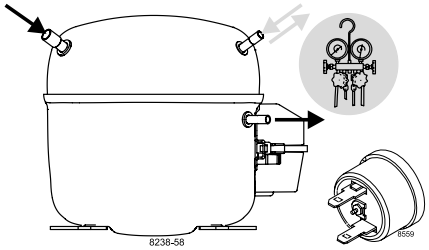


# SCE Compressors
## (External Protector)

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

## Service/Repair – R290, R600a, R170, R1270, R1234yf
(applies to all flammable refrigerants)

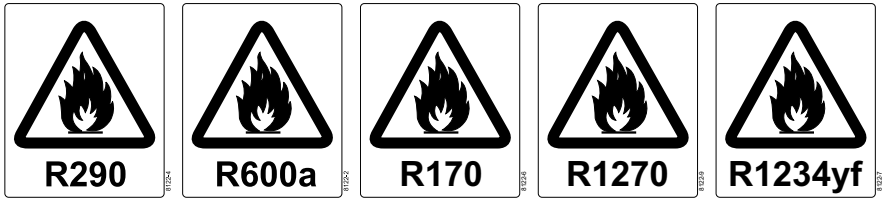


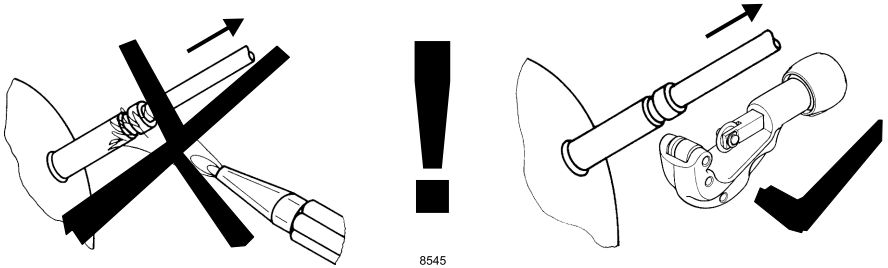


## Brazing on Suction Connectors (Direct Intake)



**! max. 350°C/662°F !**
**at socket**

brazing solder: phosphor (LP7) or silver

Refer to Product Bulletin:
**Brazing on Suction Connectors**
**(SCE Compressors with Direct Suction Intake)**

**Dismantling, recycling, disposal:** At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.secop.com**