Singolo
Imballi

Single Pack KLF5.6CNT 200-240V 50Hz / 208-230V 60Hz CSIR

Codice Imballo Singolo: **195B4700**

Posizione	Titolo	Codice	Quantità
1	Compressor KLF5.6CNT	106H2612	1
2	Bolt joint for one compressor | M6 | ø16mm	118-1917	1
Below electrical equipment is pre-assembled on the compressor:			
3	Starting relay (QLZ-4.4A, overload protector T1218/L6)	117U7077	1
4	Starting capacitor (80µF 260V, 6.3mm)	117U5003	1
5	Cable clamp	16058100	1
6	Screw for cable clamp	10636000	1
7	Screw for cable clamp	10636200	1
8	Cover	10636401	1
9	Earth screw	10641201	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • **www.secop.com**

Secop non si assume alcuna responsabilità per eventuali errori presenti in cataloghi, brochure e altro materiale stampato. Secop si riserva il diritto di modificare i propri prodotti senza preavviso. Ciò vale anche per i prodotti già ordinati, a condizione che tali modifiche possano essere apportate senza che siano necessarie modifiche successive alle specifiche già concordate. Tutti i marchi presenti in questo materiale sono di proprietà delle rispettive aziende. Secop e il logo Secop sono marchi di Secop GmbH. Tutti i diritti sono riservati.

Model
KLF5.6CNT

Sales code:
106H2612

Compressor Data

Refrigerant(s)	**R290**
Refr. charge - tech. limit	**200g / 7.05oz**
Weight	**9.40 kg / 20.72lbs**
Displacement	**5.60 cm3 / 0.34cu.in**
Compressors on pallet	**100**

General – Configurations With KLF5.6CNT

–	**Conf. 1**	**Conf. 2**
Motor configuration	CSIR	CSIR
Power supply (nominal)	200-240 V/50 Hz	208-230 V/60 Hz
Number of phases	1	1
Voltage range	187-254 V	198-253 V
Approvals	UL, CCC, CB	UL, CCC, CB, KC
Starting torque	HST	HST
Refrigerant	R290	R290
Application	LBP+MBP	LBP+MBP
Hot gas defrost	OK	OK
Long interval pull down	OK	–

Application Notes

- Electrical equipment is included and pre-assembled to compressor.
- Provision for PE Grounding is located at the PE Stamp on the compressor

Model
KLF5.6CNT

Sales code:
106H2612

Compressor Design

Oil type	**POE**	Winding resistance main	**10.7 Ohm**
Oil viscosity	**19,2cSt**	Winding resistance aux	**12.2 Ohm**
Oil quantity	**170 / 5.75fl.oz**	Max. winding temp.	**125 °C**
Free gas volume comp.	**1,605 cm3 / 54.27fl.oz**	Max. discharge temp.	**130°C / 266°F**
Motor protection	**external**		

Compressor Dimensions

Housing

A Height	**182mm / 7.17in**
B Height	**175mm / 6.89in**
C Length shell	**198mm / 7.80in**
D Length w. cover	**238mm / 9.37in**
E Width	**160mm / 6.30in**

Find 3D Model here



Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 8.11–8.29 / 0.32–0.33in	øi 6.11–6.29 / 0.24–0.25in	øi 6.11–6.29 / 0.24–0.25in
Material	CU	CU	CU
Horizontal angle ±2°	35°	13°	0°
Vertical angle ±2°	30°	40°	145°
Position l/h/w [mm]	119/73/59 / 4.69/2.87/2.32in	117/107/66 / 4.61/4.21/2.60in	-88/101/71 / -3.46/3.98/2.80in
Straight tube l. [mm]	13.5 / 0.53in	13.5 / 0.53in	13.5 / 0.53in

Mounting Accessories

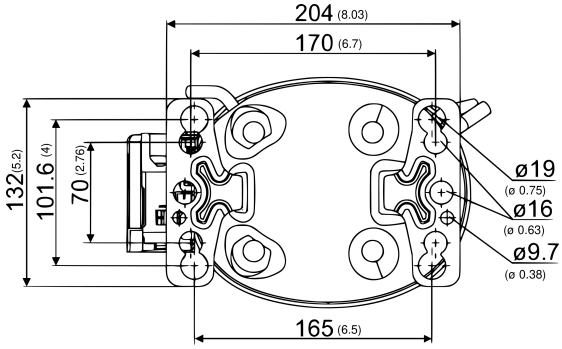

Dimensions in mm [in]

Bolt joint



Snap-on



	one comp.	multi pack
Bolt joint | M6 | ø16mm	118-1917	118-1918
Bolt joint | ø1/4" | ø16mm	118-1946	–
Bolt joint | ø1/4" | ø19mm	118-1949	–
Snap-on | ø7,3 | ø16mm	118-1947	118-1919

Model
KLF5.6CNT Configuration 1

Sales code:
106H2612

Configuration

Motor configuration	**CSIR**
Power supply (nominal)	**200-240 V/50 Hz 1~**
Refrigerant	**R290**
Application	**LBP+MBP**
Voltage range	**187-254 V**
Starting torque	**HST**
Approvals	**UL, CCC, CB**
Starting device type	**relay**
Run capacitor	**-/-**
Start capacitor	**80 µF**
LRA (locked rotor amps / 4s/ U(N))	**10.3 A**
RLA (rated load amps / 1s/ U(N))	**1.7 A**
Cut in current (U(N))	**15.5 A**

Ambient/ machine room temperatures minimum /maximum
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling
fan 3m/s

Electrical Accessories / Wiring Diagram

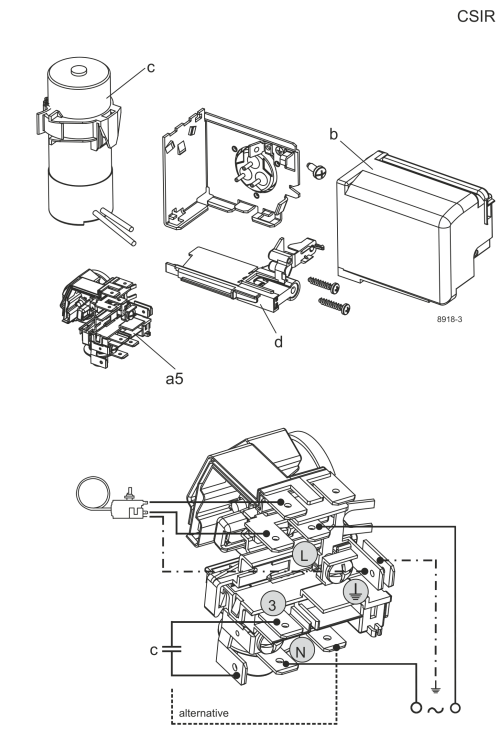

View full size

Components (already pre-assembled)
a5 current relay (1218/L6 - S7) 117U7077
c start capacitor (80µF, 6.3mm) 117U5003
b cover terminal board 10636401
. screw uni en iso 4757 10641201

Alternative components
. cable clamp 16058100
. screw - uni6954 10636000
. screw - uni6954 10636200

Operation Pressure Range

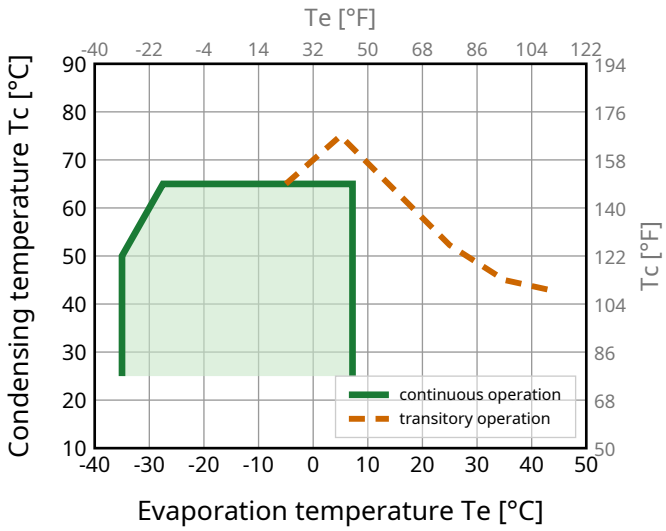

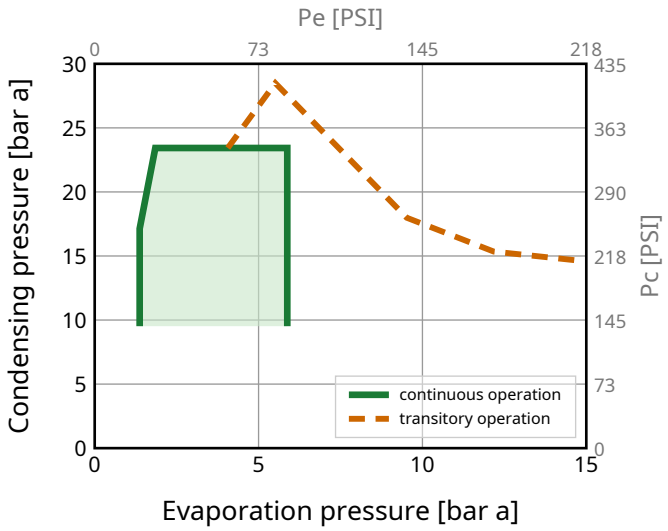

Model
KLF5.6CNT Configuration 1

Sales code:
106H2612

Standard Conditions

R290, 220 V/50 Hz, CSIR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	ṁ	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	**272**	930	234	**1.55**	5.28	176	1.22	2.77	**ASHRAE LBP**
-25 -13	55 131	32 89.6	55 131	**202**	688	173	**1.19**	4.06	170	1.20	2.53	**CECOMAF LBP**
-35 -31	40 104	20 68	40 104	**148**	504	127	**1.21**	4.11	122	1.07	1.69	**EN12900 LBP**
-6.7 20	54.4 129.9	35 95	46.1 115	**490**	1671	421	**2.06**	7.03	238	1.43	5.61	**ASHRAE MBP**
-10 14	55 131	32 89.6	55 131	**388**	1325	334	**1.71**	5.83	227	1.39	4.94	**CECOMAF MBP**
-10 14	45 113	20 68	45 113	**431**	1472	371	**2.08**	7.10	207	1.32	5.31	**EN12900 MBP**

Performance Tables

R290, 220 V/50 Hz, CSIR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	ṁ
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	**147**	501	126	**1.13**	3.86	130	1.09	1.66
-30	-22	**189**	644	162	**1.30**	4.44	145	1.13	2.13
-20	-4	**298**	1015	256	**1.68**	5.74	177	1.22	3.39
-10	14	**448**	1530	386	**2.17**	7.39	207	1.32	5.15
0	32	**652**	2224	560	**2.81**	9.60	232	1.40	7.58
7.2	45	**836**	2854	719	**3.44**	11.73	243	1.45	9.84

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	**113**	385	97	**0.85**	2.92	132	1.09	1.41
-30	-22	**155**	527	133	**1.03**	3.51	150	1.14	1.93
-20	-4	**256**	872	220	**1.35**	4.61	189	1.26	3.22
-10	14	**388**	1325	334	**1.71**	5.83	227	1.39	4.94
0	32	**564**	1923	485	**2.16**	7.37	261	1.51	7.27
7.2	45	**722**	2464	621	**2.58**	8.79	280	1.59	9.43

Model
KLF5.6CNT Configuration 2

Sales code:
106H2612

Configuration

Motor configuration	**CSIR**
Power supply (nominal)	**208-230 V/60 Hz 1~**
Refrigerant	**R290**
Application	**LBP+MBP**
Voltage range	**198-253 V**
Starting torque	**HST**
Approvals	**UL, CCC, CB, KC**
Starting device type	**relay**
Run capacitor	**-/-**
Start capacitor	**80 µF**
LRA (locked rotor amps / 4s/ U(N))	**10.3 A**
RLA (rated load amps / 1s/ U(N))	**1.7 A**
Cut in current (U(N))	**15.5 A**

Ambient/ machine room temperatures minimum /maximum
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling
fan 3m/s

Electrical Accessories / Wiring Diagram

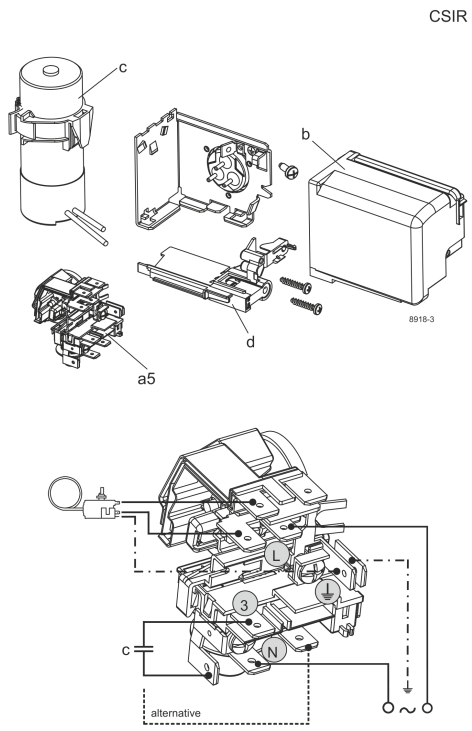

View full size

Components (already pre-assembled)
a5 current relay (1218/L6 - S7) 117U7077
c start capacitor (80µF, 6.3mm) 117U5003
b cover terminal board 10636401
. screw uni en iso 4757 10641201

Alternative components
. cable clamp 16058100
. screw - uni6954 10636000
. screw - uni6954 10636200

Operation Pressure Range

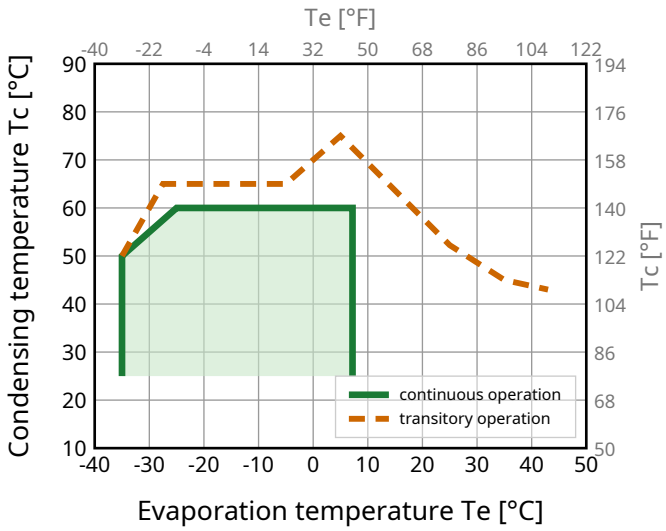

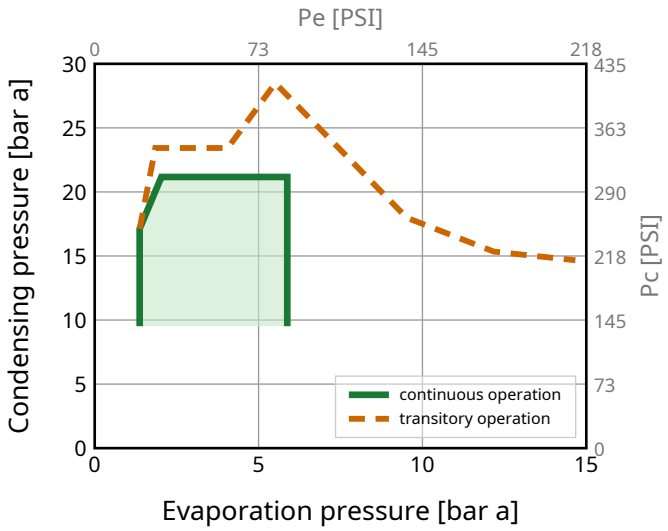

Model

KLF5.6CNT Configuration 2

Sales code:

106H2612

Standard Conditions

R290, 230 V/60 Hz, CSIR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	ṁ	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	**334**	1138	287	**1.58**	5.41	210	1.34	3.39	**ASHRAE LBP**
-25 -13	55 131	32 89.6	55 131	**248**	848	214	**1.23**	4.20	202	1.32	3.12	**CECOMAF LBP**
-35 -31	40 104	20 68	40 104	**189**	644	162	**1.21**	4.13	156	1.19	2.17	**EN12900 LBP**
-6.7 20	54.4 129.9	35 95	46.1 115	**604**	2061	519	**2.07**	7.05	292	1.62	6.92	**ASHRAE MBP**
-10 14	55 131	32 89.6	55 131	**478**	1631	411	**1.72**	5.87	278	1.57	6.08	**CECOMAF MBP**
-10 14	45 113	20 68	45 113	**539**	1839	463	**2.08**	7.11	258	1.50	6.63	**EN12900 MBP**

Performance Tables

R290, 230 V/60 Hz, CSIR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	ṁ
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-35	-31	**180**	616	155	**1.14**	3.90	158	1.20	2.03
-30	-22	**232**	792	200	**1.31**	4.46	178	1.25	2.62
-20	-4	**371**	1266	319	**1.69**	5.77	219	1.37	4.22
-10	14	**560**	1912	482	**2.17**	7.39	258	1.50	6.43
0	32	**802**	2736	690	**2.78**	9.48	289	1.60	9.32
7.2	45	**1010**	3445	868	**3.36**	11.45	301	1.65	11.88

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-35	-31	**156**	533	134	**1.02**	3.47	154	1.19	1.94
-30	-22	**196**	670	169	**1.11**	3.79	177	1.25	2.45
-20	-4	**313**	1067	269	**1.37**	4.69	228	1.40	3.94
-10	14	**478**	1631	411	**1.72**	5.87	278	1.57	6.08
0	32	**695**	2371	598	**2.16**	7.37	322	1.73	8.96
7.2	45	**884**	3017	760	**2.56**	8.73	345	1.82	11.55



KL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

RSIR

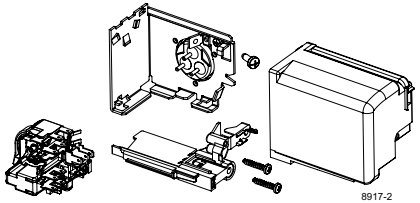

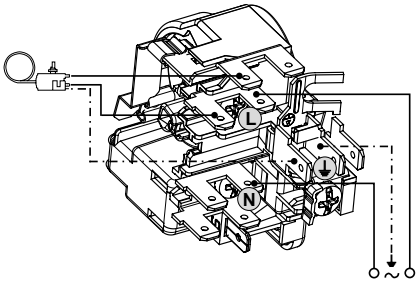

RSCR

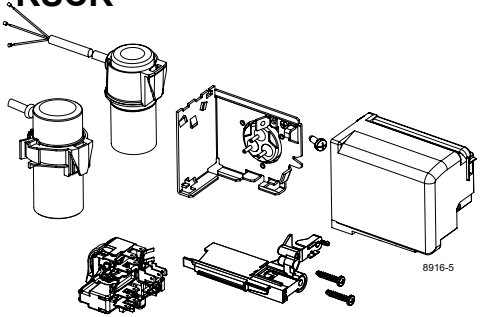

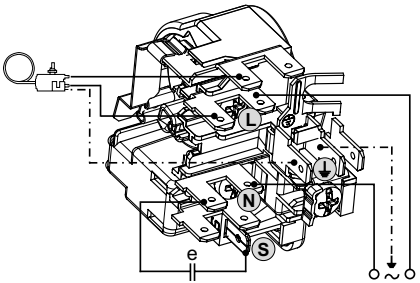

CSIR

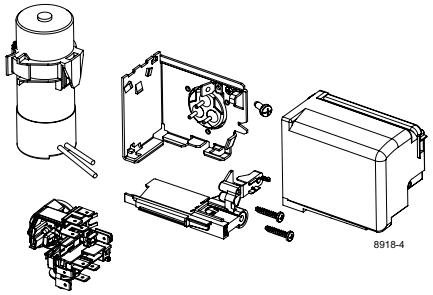

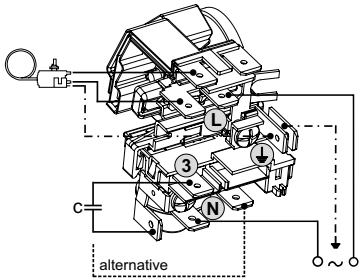



KL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf

(applies to all flammable refrigerants)

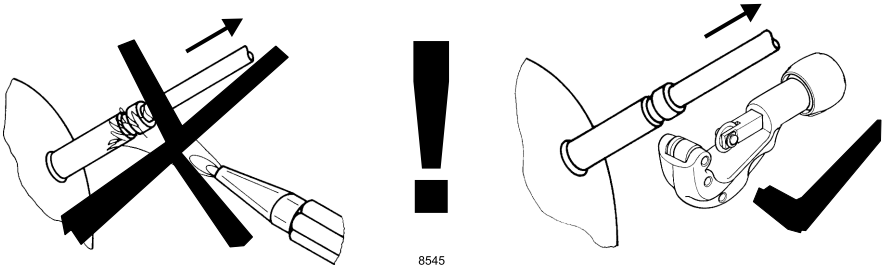

Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.secop.com**