Singolo
Imballi

Single Pack KLF6.6CNH 115-127V 60Hz CSIR

Codice Imballo Singolo: **195B4701**

Posizione	Titolo	Codice	Quantità
1	Compressor KLF6.6CNH	106H3710	1
2	Bolt joint for one compressor | M6 | ø16mm	118-1917	1
Below electrical equipment is pre-assembled on the compressor:			
3	Starting relay (QLZ-11.6A, overload protector T1141/L6)	117U7076	1
4	Starting capacitor (240µF 125V, 6.3mm)	117U5002	1
5	Cable clamp	16058100	1
6	Screw for cable clamp	10636000	1
7	Screw for cable clamp	10636200	1
8	Cover	10636401	1
9	Earth screw	10641201	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • **www.secop.com**

Secop non si assume alcuna responsabilità per eventuali errori presenti in cataloghi, brochure e altro materiale stampato. Secop si riserva il diritto di modificare i propri prodotti senza preavviso. Ciò vale anche per i prodotti già ordinati, a condizione che tali modifiche possano essere apportate senza che siano necessarie modifiche successive alle specifiche già concordate. Tutti i marchi presenti in questo materiale sono di proprietà delle rispettive aziende. Secop e il logo Secop sono marchi di Secop GmbH. Tutti i diritti sono riservati.

Model
KLF6.6CNH

Sales code:
106H3710

Compressor Data

Refrigerant(s)	**R290**
Refr. charge - tech. limit	**200g / 7.05oz**
Weight	**9.50 kg / 20.94lbs**
Displacement	**6.60 cm3 / 0.40cu.in**
Compressors on pallet	**100**

General – Configurations With KLF6.6CNH

–	**Conf. 1**
Motor configuration	CSIR
Power supply (nominal)	115-127 V/60 Hz
Number of phases	1
Voltage range	95-140 V
Approvals	UL, CCC
Starting torque	HST
Refrigerant	R290
Application	LBP+MBP
Hot gas defrost	OK
Long interval pull down	OK

Application Notes

- Electrical equipment is included and pre-assembled to compressor.
- Operation possible until tilted up to 3 degrees
- Provision for PE Grounding is located at the PE Stamp on the compressor

Model
KLF6.6CNH

Sales code:
106H3710

Compressor Design

Oil type	**POE**	Winding resistance main	**2 Ohm**
Oil viscosity	**9,7cSt**	Winding resistance aux	**5.3 Ohm**
Oil quantity	**165 / 5.58fl.oz**	Max. winding temp.	**125 °C**
Free gas volume comp.	**1,580 cm3 / 53.43fl.oz**	Max. discharge temp.	**130°C / 266°F**
Motor protection	**external**		

Compressor Dimensions

Housing

A Height	**182mm / 7.17in**
B Height	**175mm / 6.89in**
C Length shell	**198mm / 7.80in**
D Length w. cover	**238mm / 9.37in**
E Width	**160mm / 6.30in**

Find 3D Model here



Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 8.11–8.29 / 0.32–0.33in	øi 6.41–6.59 / 0.25–0.26in	øi 6.41–6.59 / 0.25–0.26in
Material	CU	CU	CU
Horizontal angle ±2°	35°	13°	0°
Vertical angle ±2°	30°	40°	145°
Position l/h/w [mm]	119/73/59 / 4.69/2.87/2.32in	117/107/66 / 4.61/4.21/2.60in	-88/101/71 / -3.46/3.98/2.80in
Straight tube l. [mm]	13.5 / 0.53in	13.5 / 0.53in	13.5 / 0.53in

Mounting Accessories

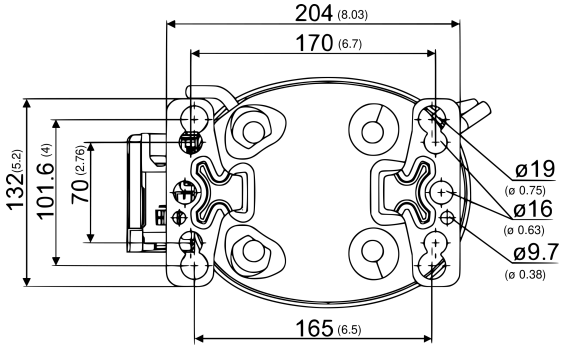

Dimensions in mm [in]

Bolt joint



Snap-on



	one comp.	multi pack
Bolt joint | M6 | ø16mm	118-1917	118-1918
Bolt joint | ø1/4" | ø16mm	118-1946	–
Bolt joint | ø1/4" | ø19mm	118-1949	–
Snap-on | ø7,3 | ø16mm	118-1947	118-1919

Model
KLF6.6CNH Configuration 1

Sales code:
106H3710

Configuration

Motor configuration	**CSIR**
Power supply (nominal)	**115-127 V/60 Hz 1~**
Refrigerant	**R290**
Application	**LBP+MBP**
Voltage range	**95-140 V**
Starting torque	**HST**
Approvals	**UL, CCC**
Starting device type	**relay**
Run capacitor	**-/-**
Start capacitor	**240 µF**
LRA (locked rotor amps / 4s/ U(N))	**31.1 A**
RLA (rated load amps / 1s/ U(N))	**4.3 A**
Cut in current (U(N))	**31.5 A**

Ambient/ machine room temperatures minimum /maximum
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling
fan 3m/s

Electrical Accessories / Wiring Diagram

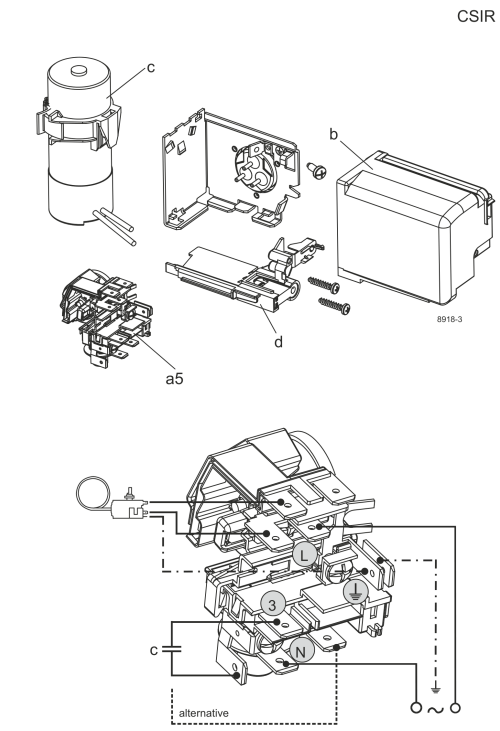

View full size

Components (already pre-assembled)
a5 current relay (T1141/L6-S6) 117U7076
c start capacitor (240µF) 117U5002
. cable clamp 16058100
b cover terminal board 10636401
. screw uni en iso 4757 10641201
. screw - uni6954 10636000

Alternative components
. screw - uni6954 10636200

Operation Pressure Range

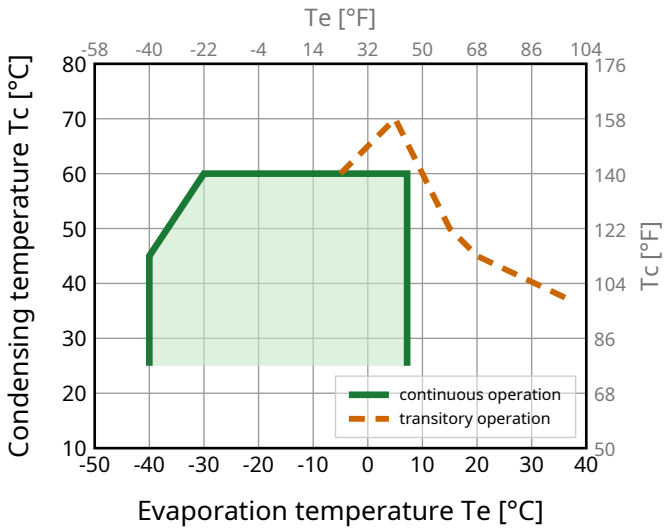

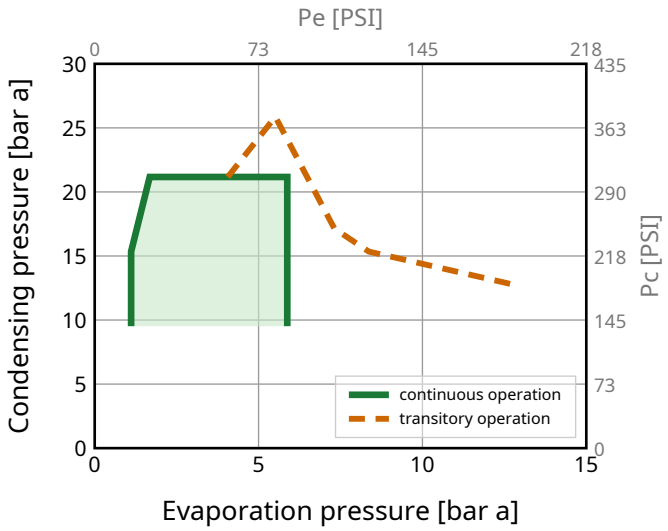

Model
KLF6.6CNH Configuration 1

Sales code:
106H3710

Standard Conditions

R290, 115 V/60 Hz, CSIR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	ṁ	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	**399**	1361	343	**1.62**	5.53	246	3.18	4.05	**ASHRAE LBP**
-25 -13	55 131	32 89.6	55 131	**297**	1014	256	**1.26**	4.30	236	3.13	3.73	**CECOMAF LBP**
-35 -31	40 104	20 68	40 104	**224**	766	193	**1.20**	4.11	186	2.89	2.58	**EN12900 LBP**
-6.7 20	54.4 129.9	35 95	46.1 115	**718**	2448	617	**2.08**	7.09	346	3.84	8.21	**ASHRAE MBP**
-10 14	55 131	32 89.6	55 131	**568**	1938	488	**1.73**	5.90	328	3.72	7.22	**CECOMAF MBP**
-10 14	45 113	20 68	45 113	**640**	2184	551	**2.06**	7.02	311	3.60	7.88	**EN12900 MBP**

Performance Tables

R290, 115 V/60 Hz, CSIR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	ṁ
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-40	-40	**162**	552	139	**0.99**	3.37	164	2.80	1.82
-30	-22	**278**	947	239	**1.32**	4.51	210	2.99	3.13
-20	-4	**442**	1509	380	**1.69**	5.76	262	3.28	5.03
-10	14	**666**	2271	572	**2.14**	7.30	311	3.60	7.64
0	32	**956**	3263	823	**2.74**	9.34	349	3.87	11.12
7.2	45	**1213**	4139	1043	**3.32**	11.32	366	3.99	14.27

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-40	-40	**140**	477	120	**0.92**	3.14	152	2.74	1.74
-30	-22	**234**	797	201	**1.14**	3.88	206	2.96	2.92
-20	-4	**373**	1274	321	**1.40**	4.77	267	3.31	4.70
-10	14	**568**	1938	488	**1.73**	5.90	328	3.72	7.22
0	32	**827**	2821	711	**2.17**	7.40	381	4.11	10.66
7.2	45	**1058**	3611	910	**2.58**	8.81	410	4.33	13.83



KL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

RSIR

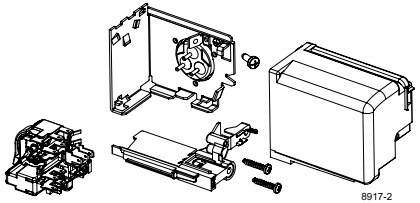

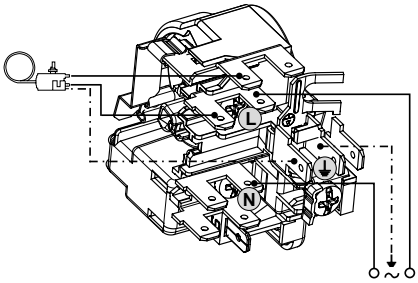

RSCR

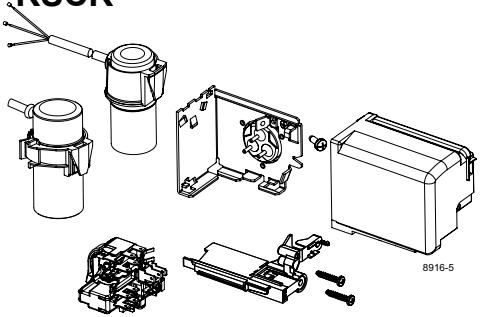

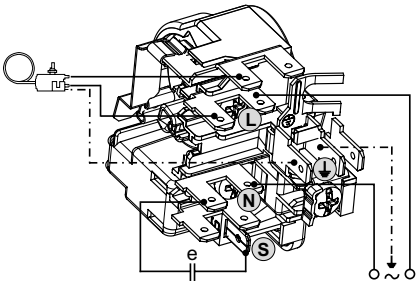

CSIR

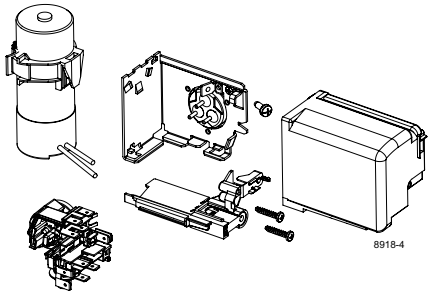

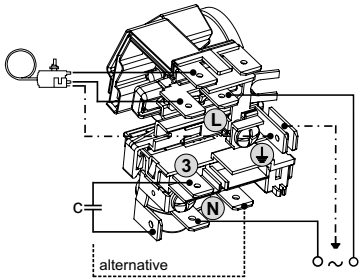



KL Compressors

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf

(applies to all flammable refrigerants)

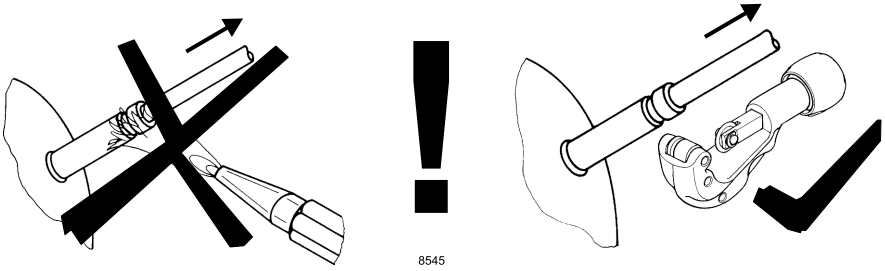

Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.secop.com**