

Single Pack NLE13MNDX 220-240V 50Hz CSCR

Codice Imballo Singolo: **195B4833**

Posizione	Titolo	Codice	Quantità
1	Compressor NLE13MNDX	105H7302	1
2	Start equipment NLE	117U8201	1
3	Starting capacitor (80µF 260V)	117U5353	1
4	Run Capacitor (10µF 450V, 6.3mm)	117-7166	1
5	Run capacitor bracket	117-0314	1
6	Cover NLE	117U1038	1
7	Cord relief	103N1007	1
8	Screw for bracket M4x8mm	117-0301	1
9	Bolt joint for one compressor M6 ø16mm	118-1917	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • www.secop.com

Secop non si assume alcuna responsabilità per eventuali errori presenti in cataloghi, brochure e altro materiale stampato. Secop si riserva il diritto di modificare i propri prodotti senza preavviso. Ciò vale anche per i prodotti già ordinati, a condizione che tali modifiche possano essere apportate senza che siano necessarie modifiche successive alle specifiche già concordate. Tutti i marchi presenti in questo materiale sono di proprietà delle rispettive aziende. Secop e il logo Secop sono marchi di Secop GmbH. Tutti i diritti sono riservati.

Model

Designation	NLE13MNDX	220-240V/50Hz 1~	Sales code:	105H7302
-------------	------------------	-------------------------	-------------	-----------------

Compressor design

Oil type	Polyolester	Refrigerant(s)	R290
Oil viscosity	32cSt	Displacement	12,6cm ³ / 0,77cu.in
Oil quantity	298cm ³ / 10,1fl.oz	Compressors on pallet	
Refr. charge - tech. limit	300g / 10,6oz		
Free gas volume comp.	2360cm ³ / 79,8fl.oz		
Weight	11,8kg / 26lbs		
Motor protection	external		
Winding resistance main	7,5Ω (at 25°C)		
Winding resistance aux	12,9Ω (at 25°C)		
Max. winding temp.	125°C / 257°F		
Max. discharge temp.	130°C / 266°F		



General - Configurations with NLE13MNDX

Conf. 1

Motor configuration	CSCR
Power supply (nominal)	220-240V/50Hz
Number of phases	1
Voltage range	198-254V
Approvals	VDE
Starting torque	HST
Note	- / -

Applications with NLE13MNDX

Conf. 1

Refrigerant	R290
Application	MBP
System cooling	fan 3m/s
Hot gas defrost	OK
Long interval pull down	OK

Electrical data - Configurations with NLE13MNDX

Conf. 1


Starting device type	relay
Run capacitor	10μF
Start capacitor	80μF
LRA (locked rotor amps / 4s/ U(N))	16,7A
RLA (rated load amps / 1s/ U(N))	2,2A
Cut in current (U(N))	16,7A

Model			
Designation	NLE13MNDX	220-240V/50Hz 1~	Sales code: 105H7302


Compressor dimensions

Housing	A Height	209mm / 8,23in
	B Height	203mm / 7,99in
	C Length shell	205mm / 8,07in
	D Length w. cover	262mm / 10,31in
	E Width	166mm / 6,54in

Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 8,11-8,29	øi 6,11-6,29	øi 6,11-6,29
(i:inside, o:outside) [in]	øi 0,32-0,33	øi 0,24-0,25	øi 0,24-0,25
Material	copper	copper	copper
Horizontal angle	±2° 11°	0°	0°
Vertical angle	±2° 15°	21°	25°
Position l/h/w [mm]	140/72/59	94/98/87	-109/93/74
	[in] 5,5/2,8/2,3	3,7/3,9/3,4	-4,3/3,7/2,9
Straight tube l.	[mm] 12	12	12
	[in] 0,5	0,5	0,5

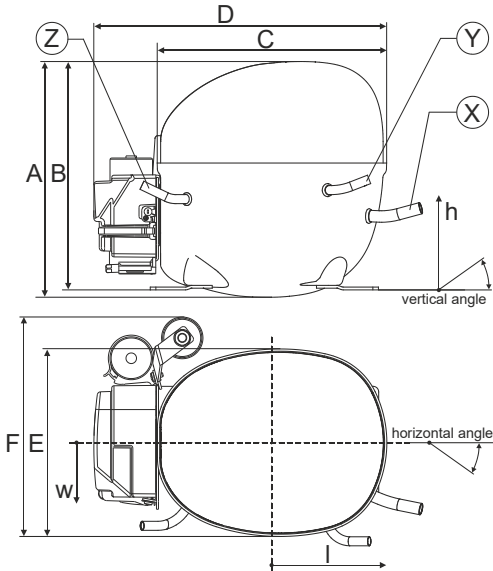


Compressor fixation

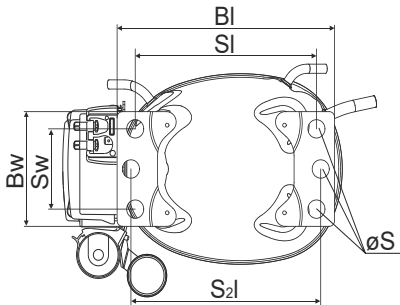


Baseplate	[mm]	[inch]
BI	204	8.03
Bw	100	3.94
Small holes	[mm]	[inch]
SI	170	6.7
Sw	70	2.76
S2l	178	7
øS	ø 16	ø 0.63

Bolt joint



Snap-on



Mounting accessories	one comp.	multi pack
Bolt joint M6 ø16mm	118-1917	118-1918
Bolt joint ø1/4" ø16mm	118-1946	
Snap-on ø7,3 ø16mm	118-1947	118-1919

Application notes

Provision for PE Grounding is located at the PE Stamp on the compressor

Model



Designation **NLE13MNDX** **220-240V/50Hz** Conf. 1 Sales code: **105H7302**

Configuration

Motor configuration CSCR
Power supply (nominal) 220-240V/50Hz 1~
Refrigerant R290
Application MBP
Voltage range 198-254V
Starting torque HST
Approvals VDE

Electrical accessories / wiring diagram

CSCR

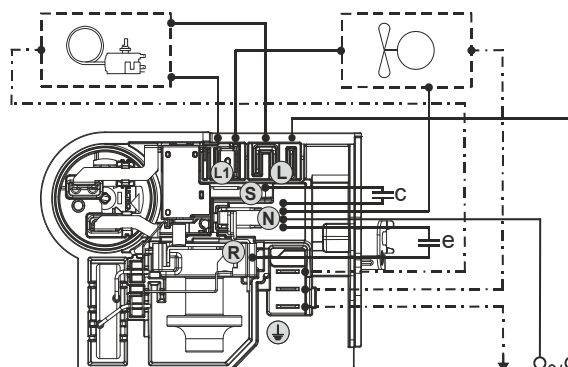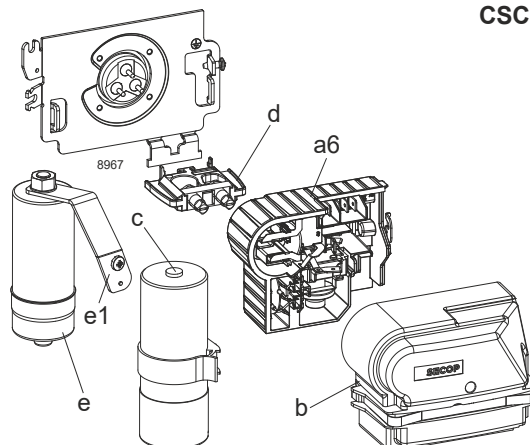



Ambient/ machine room temperatures minimum /maximum

Ambient temperature range: 10 - 43°C / 50 - 110°F

Machine room temperature range: 10 - 48°C / 50 - 119°F

Compressor cooling: fan 3m/s

Operation pressure range

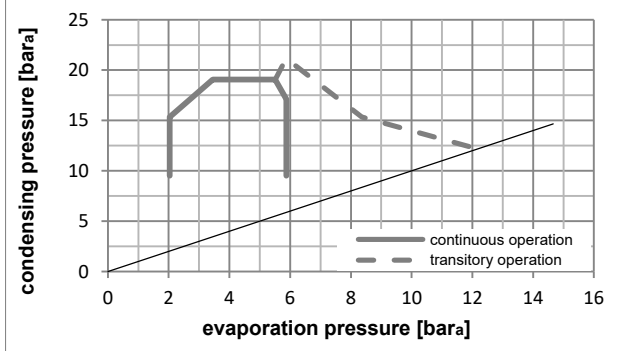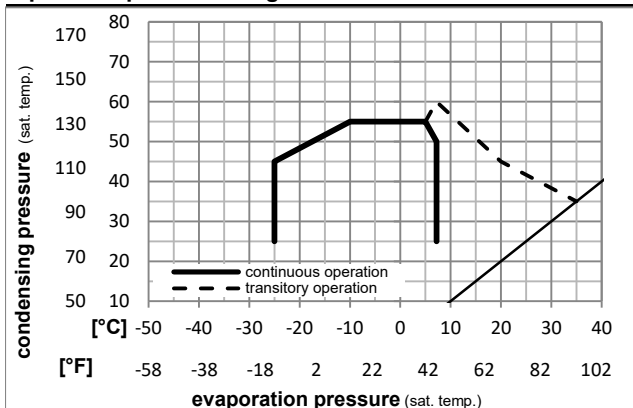

Components

a6	NL starter kit	117U8201
c	start capacitor (80µF)	117U5353
e	run cap (10µF, 6.3mm, c.length 280mm)	117-7166
b	cover terminal board + clamp	117U1038
e1	retaining clamp	117-0314
	screw M4x8mm	117-0301
d	cord relief	103N1007

Model

Designation **NLE13MNDX** **220-240V/50Hz** Conf. 1 Sales code: **105H7302**

Optimization + standard conditions

R290, 220V/50Hz, CSCR, fan 3m/s, VDE

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)						Power consumption			
Return gas temp.					Liquid temp.						Current consumption			
Cooling capacity					COP		EER		Ref. mass flow					
pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	P1	I	m		
[°C]										[W]	[A]	[kg/h]		
-7	54	35	46	1136,7	3882	978,2	2,09	7,14	1,80	544,0	2,55	12,97	ASHRAE MBP	
20	130	95	115											
[°C]														
[°F]														
-10	55	32	55	906,1	3095	779,8	1,75	5,99	1,51	516,3	2,43	11,46	cecomaf MBP	
14	131	90	131											
[°C]														
[°F]														
-10	45	20	45	1015,3	3468	873,8	2,19	7,49	1,89	463,2	2,19	12,47	EN12900 MBP	
14	113	68	113											
[°C]														
[°F]														
-7	49	18	49	1072,0	3661	922,6	2,11	7,21	1,82	507,8	2,39	13,92	ARI540 MBP	
20	120	65	120											
[°C]														
[°F]														
-10	45	32	45	1057,0	3610	909,7	2,28	7,79	1,96	463,2	2,19	12,09	opt	
14	113	90	113											
[°C]														
[°F]														
-25	45	32	45	569,7	1946	490,3	1,60	5,48	1,38	355,1	1,73	6,43	opt	
-13	113	90	113											
[°C]														
[°F]														

Performance tables

R290, 220V/50Hz, CSCR, fan 3m/s, VDE

	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-25	-13	569,7	1946	490,3	1,60	5,48	1,38	355,1	1,73	6,43
cond. pressure	-20	-4	710,1	2425	611,2	1,82	6,20	1,56	391,0	1,88	8,04
pc= 45/113	-15	5	872,2	2979	750,6	2,04	6,96	1,75	427,7	2,03	9,92
return gas temp.	-10	14	1057,0	3610	909,7	2,28	7,79	1,96	463,2	2,19	12,09
RGT= 32/90	-5	23	1265,9	4323	1089,5	2,56	8,73	2,20	495,3	2,33	14,58
liquid temp	0	32	1500,1	5123	1291,0	2,87	9,81	2,47	522,0	2,45	17,40
Tliq= 45/113	7,2	45	1884,3	6435	1621,6	3,45	11,77	2,97	546,8	2,56	22,14
[°C / °F]	-25	-13	484,2	1654	416,7	1,30	4,44	1,12	372,2	1,80	6,03
cond. pressure	-20	-4	605,4	2067	521,0	1,44	4,93	1,24	419,0	2,00	7,57
pc= 55/131	-15	5	745,6	2546	641,7	1,59	5,44	1,37	467,7	2,21	9,37
return gas temp	-10	14	906,1	3095	779,8	1,75	5,99	1,51	516,3	2,43	11,46
RGT= 32/90	-5	23	1088,2	3716	936,5	1,93	6,60	1,66	562,8	2,63	13,86
liquid temp	0	32	1293,0	4416	1112,7	2,14	7,30	1,84	604,9	2,82	16,61
Tliq= 55/131	7,2	45	1630,3	5568	1403,1	2,49	8,51	2,15	653,9	3,05	21,24



NLE Plus Compressors


SECCP

Keep electrical equipment clear from oil, chemicals, and water



When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

CSCR

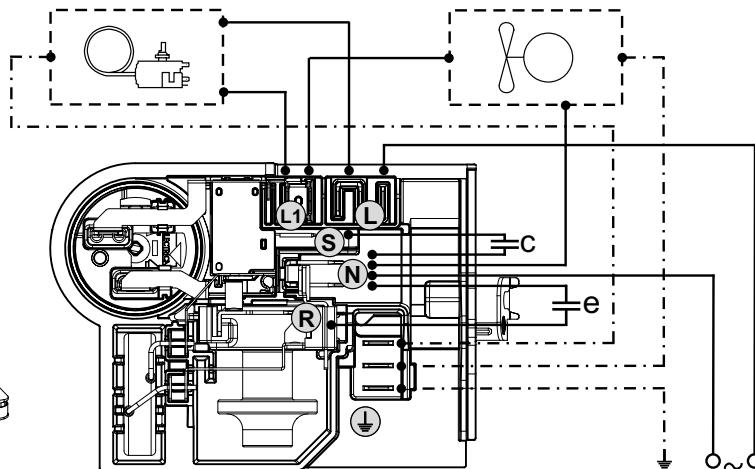



NLE Plus Compressors

SECCP

Keep electrical equipment clear from oil, chemicals, and water



When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf (applies to all flammable refrigerants)



8545



Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.seccp.com**