

Single Pack NLE15LNDX 220-240V 50Hz CSCR

Codice Imballo Singolo: **195B4836**

Posizione	Titolo	Codice	Quantità
1	Compressor NLE15LNDX	105H7500	1
2	Start equipment NLE	117U8201	1
3	Starting capacitor (80µF 260V)	117U5353	1
4	Run Capacitor (10µF 450V, 6.3mm)	117-7166	1
5	Run capacitor bracket	117-0314	1
6	Cover NLE	117U1038	1
7	Cord relief	103N1007	1
8	Screw for bracket M4x8mm	117-0301	1
9	Bolt joint for one compressor M6 ø16mm	118-1917	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • www.secop.com

Secop non si assume alcuna responsabilità per eventuali errori presenti in cataloghi, brochure e altro materiale stampato. Secop si riserva il diritto di modificare i propri prodotti senza preavviso. Ciò vale anche per i prodotti già ordinati, a condizione che tali modifiche possano essere apportate senza che siano necessarie modifiche successive alle specifiche già concordate. Tutti i marchi presenti in questo materiale sono di proprietà delle rispettive aziende. Secop e il logo Secop sono marchi di Secop GmbH. Tutti i diritti sono riservati.

Model

Designation	NLE15LNDX	220-240V/50Hz 1~	Sales code:	105H7500
-------------	------------------	-------------------------	-------------	-----------------

Compressor design

Oil type	Polyolester	Refrigerant(s)	R290
Oil viscosity	32cSt	Displacement	14,65cm ³ / 0,89cu.in
Oil quantity	298cm ³ / 10,1fl.oz	Compressors on pallet	
Refr. charge - tech. limit	300g / 10,6oz		
Free gas volume comp.	2360cm ³ / 79,8fl.oz		
Weight	11,8kg / 26lbs		
Motor protection	external		
Winding resistance main	7,1Ω (at 25°C)		
Winding resistance aux	12,4Ω (at 25°C)		
Max. winding temp.	125°C / 257°F		
Max. discharge temp.	130°C / 266°F		



General - Configurations with NLE15LNDX

	Conf. 1
Motor configuration	CSCR
Power supply (nominal)	220-240V/50Hz
Number of phases	1
Voltage range	198-254V
Approvals	VDE
Starting torque	HST
Note	- / -

Applications with NLE15LNDX

	Conf. 1
Refrigerant	R290
Application	LBP
System cooling	fan 3m/s
Hot gas defrost	OK
Long interval pull down	-/-

Electrical data - Configurations with NLE15LNDX


	Conf. 1
Starting device type	relay
Run capacitor	10μF
Start capacitor	80μF
LRA (locked rotor amps / 4s/ U(N))	16,8A
RLA (rated load amps / 1s/ U(N))	2,3A
Cut in current (U(N))	16,8A

Model			
Designation	NLE15LNDX	220-240V/50Hz 1~	Sales code: 105H7500


Compressor dimensions

Housing	A Height	209mm / 8,23in
	B Height	203mm / 7,99in
	C Length shell	205mm / 8,07in
	D Length w. cover	262mm / 10,31in
	E Width	166mm / 6,54in

Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 8,11-8,29	øi 6,11-6,29	øi 6,11-6,29
(i:inside, o:outside) [in]	øi 0,32-0,33	øi 0,24-0,25	øi 0,24-0,25
Material	copper	copper	copper
Horizontal angle	±2° 11°	0°	0°
Vertical angle	±2° 15°	21°	25°
Position l/h/w [mm]	140/72/59	94/98/87	-109/93/74
	[in] 5,5/2,8/2,3	3,7/3,9/3,4	-4,3/3,7/2,9
Straight tube l.	[mm] 12	12	12
	[in] 0,5	0,5	0,5

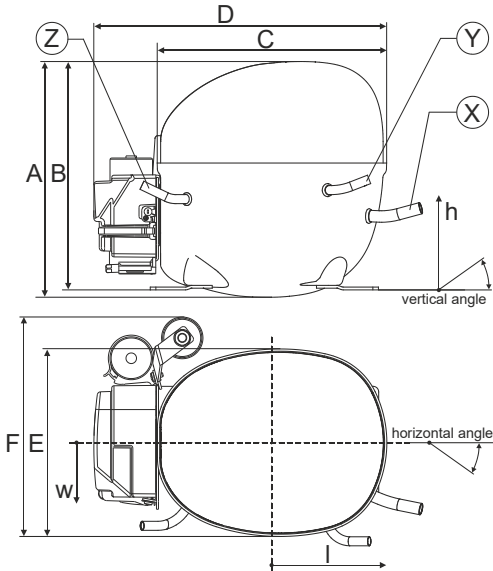


Compressor fixation

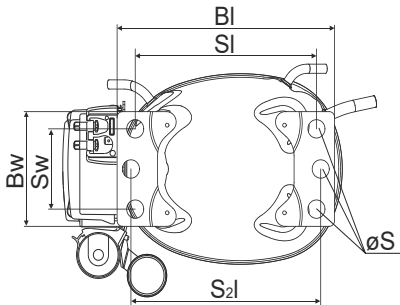


Baseplate	[mm]	[inch]
BI	204	8.03
Bw	100	3.94
Small holes	[mm]	[inch]
SI	170	6.7
Sw	70	2.76
S2l	178	7
øS	ø 16	ø 0.63

Bolt joint



Snap-on




Mounting accessories	one comp.	multi pack
Bolt joint M6 ø16mm	118-1917	118-1918
Bolt joint ø1/4" ø16mm	118-1946	
Snap-on ø7,3 ø16mm	118-1947	118-1919

Application notes

Provision for PE Grounding is located at the PE Stamp on the compressor


Model				
Designation	NLE15LNDX	220-240V/50Hz	Conf. 1	Sales code: 105H7500

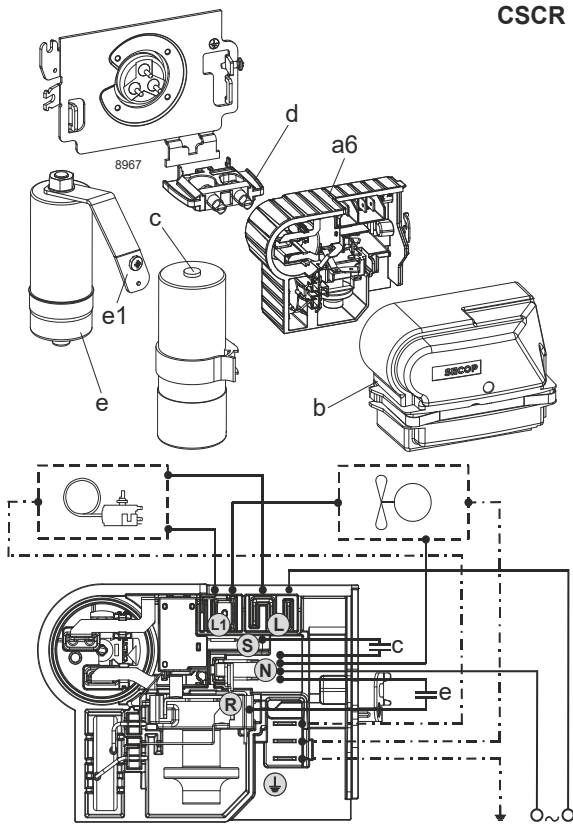Configuration		Electrical accessories / wiring diagram		
Motor configuration	CSCR			
Power supply (nominal)	220-240V/50Hz 1~			
Refrigerant	R290			
Application	LBP			
Voltage range	198-254V			
Starting torque	HST			
Approvals	VDE			

Ambient/ machine room temperatures minimum /maximum

Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	fan 3m/s

Operation pressure range

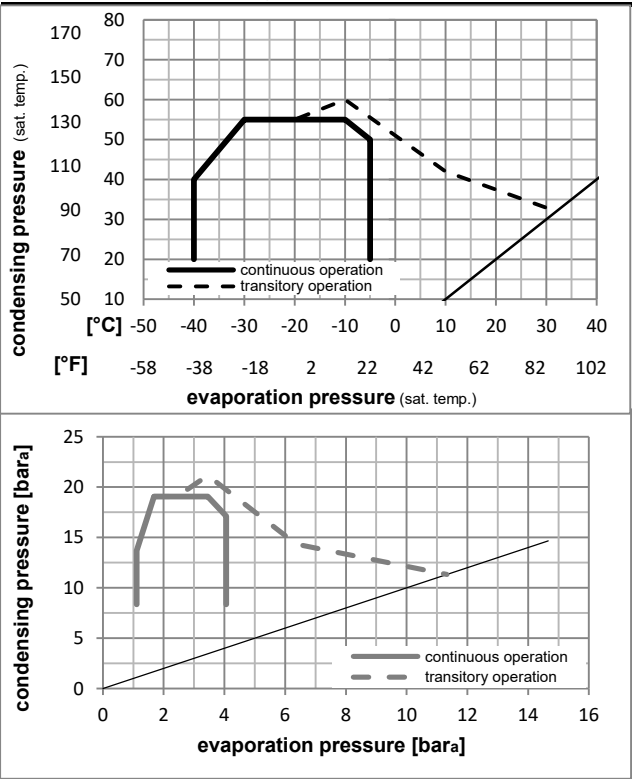

Components		
a6	NL starter kit	117U8201
c	start capacitor (80µF)	117U5353
e	run cap (10µF, 6.3mm,c.length 280mm)	117-7166
b	cover terminal board + clamp	117U1038
e1	retaining clamp	117-0314
	screw M4x8mm	117-0301
d	cord relief	103N1007

Model

Designation **NLE15LNDX** **220-240V/50Hz** Conf. 1 Sales code: **105H7500**

Optimization + standard conditions

R290, 220V/50Hz, CSCR, fan 3m/s, VDE

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)						Power consumption			
Return gas temp.					Liquid temp.						Current consumption			
Cooling capacity					COP		EER		P1		I		Ref. mass flow	
pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]		
[°C]	-23	54	32	32	775,2	2647	667,1	1,71	5,86	1,48	452,1	2,16	7,85	ASHRAE LBP
[°F]	-10	130	90	90										
[°C]	-25	55	32	55	585,3	1999	503,7	1,34	4,59	1,16	435,6	2,09	7,29	cecomaf LBP
[°F]	-13	131	90	131										
[°C]	-35	40	20	40	437,7	1495	376,7	1,38	4,70	1,18	318,2	1,61	5,00	EN12900 LBP
[°F]	-31	104	68	104										
[°C]	-23	49	4,4	49	620,6	2119	534,1	1,41	4,82	1,22	439,3	2,10	8,59	ARI540 LBP
[°F]	-10	120	40	120										
[°C]	-23	41	32	32	809,3	2764	696,5	1,94	6,63	1,67	416,7	2,00	8,20	AHAM LBP
[°F]	-10	105	90	90										
[°C]	-35	45	32	45	422,4	1442	363,5	1,30	4,44	1,12	324,9	1,64	4,73	opt
[°F]	-31	113	90	113										

Performance tables

R290, 220V/50Hz, CSCR, fan 3m/s, VDE

	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-40	-40	323,1	1103	278,0	1,14	3,91	0,98	282,5	1,50	3,61
cond. pressure	-35	-31	422,4	1442	363,5	1,30	4,44	1,12	324,9	1,64	4,73
pc= 45/113	-30	-22	537,0	1834	462,1	1,46	4,97	1,25	368,9	1,80	6,04
return gas temp.	-25	-13	668,9	2284	575,7	1,62	5,52	1,39	414,1	1,99	7,54
RGT= 32/90	-20	-4	820,2	2801	705,8	1,78	6,09	1,53	460,1	2,20	9,29
liquid temp	-15	5	992,7	3390	854,3	1,96	6,69	1,69	506,5	2,41	11,29
Tliq= 45/113	-5	23	1409,6	4814	1213,2	2,35	8,03	2,02	599,4	2,84	16,23
[°C / °F]	-40	-40	266,4	910	229,2	0,92	3,15	0,79	288,9	1,52	3,28
cond. pressure	-35	-31	360,1	1230	309,9	1,07	3,67	0,92	335,1	1,68	4,45
pc= 55/131	-30	-22	465,7	1591	400,8	1,21	4,14	1,04	384,1	1,87	5,78
return gas temp	-25	-13	585,3	1999	503,7	1,34	4,59	1,16	435,6	2,09	7,29
RGT= 32/90	-20	-4	720,9	2462	620,4	1,47	5,03	1,27	489,3	2,33	9,02
liquid temp	-15	5	874,3	2986	752,5	1,60	5,48	1,38	544,8	2,58	10,99
Tliq= 55/131	-5	23	1243,1	4245	1069,8	1,88	6,44	1,62	659,5	3,11	15,84



NLE Plus Compressors

SECCP


Keep electrical equipment clear from oil, chemicals, and water



When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

CSCR



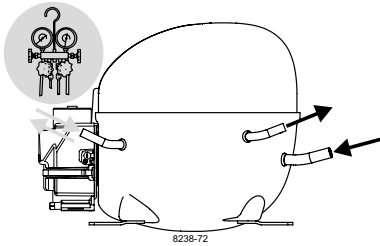

NLE Plus Compressors


SECCP

Keep electrical equipment clear from oil, chemicals, and water




When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf (applies to all flammable refrigerants)



8545

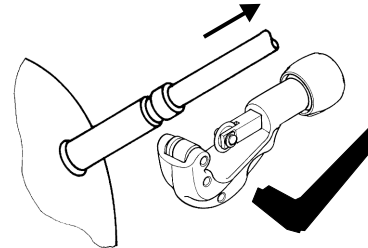

Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.seccp.com**