

SECO P

Single Pack NLE14LNDX 220-240V 50Hz CSCR

19584835

Q	Q	Q	Q	Q	Q
1	Compressor NLE14LNDX	105H7402	1		
2	Start equipment NLE	117U8201	1		
3	Starting capacitor (80µF 260V)	117U5353	1		
4	Run Capacitor (10µF 450V, 6.3mm)	117-7166	1		
5	Run capacitor bracket	117-0314	1		
6	Cover NLE	117U1038	1		
7	Cord relief	103N1007	1		
8	Screw for bracket M4x8mm	117-0301	1		
9	Bolt joint for one compressor M6 ø16mm	118-1917	1		

Model

Designation	NLE14LNDX	220-240V/50Hz 1~	Sales code:	105H7402
-------------	------------------	-------------------------	-------------	-----------------

Compressor design

Oil type	Polyolester	Refrigerant(s)	R290
Oil viscosity	32cSt	Displacement	13,6cm ³ / 0,83cu.in
Oil quantity	298cm ³ / 10,1fl.oz	Compressors on pallet	
Refr. charge - tech. limit	300g / 10,6oz		
Free gas volume comp.	2360cm ³ / 79,8fl.oz		
Weight	11,8kg / 26lbs		
Motor protection	external		
Winding resistance main	7,5Ω (at 25°C)		
Winding resistance aux	12,9Ω (at 25°C)		
Max. winding temp.	125°C / 257°F		
Max. discharge temp.	130°C / 266°F		



General - Configurations with NLE14LNDX

Conf. 1

Motor configuration	CSCR
Power supply (nominal)	220-240V/50Hz
Number of phases	1
Voltage range	198-254V
Approvals	VDE
Starting torque	HST
Note	- / -

Applications with NLE14LNDX

Conf. 1

Refrigerant	R290
Application	LBP
System cooling	fan 3m/s
Hot gas defrost	OK
Long interval pull down	-/-

Electrical data - Configurations with NLE14LNDX

Conf. 1


Starting device type	relay
Run capacitor	10μF
Start capacitor	80μF
LRA (locked rotor amps / 4s/ U(N))	16,7A
RLA (rated load amps / 1s/ U(N))	2,2A
Cut in current (U(N))	16,7A

Model

Designation	NLE14LNDX	220-240V/50Hz 1~	Sales code:	105H7402
-------------	-----------	------------------	-------------	----------

Compressor dimensions


Housing	A Height	209mm / 8,23in
	B Height	203mm / 7,99in
	C Length shell	205mm / 8,07in
	D Length w. cover	262mm / 10,31in
	E Width	166mm / 6,54in

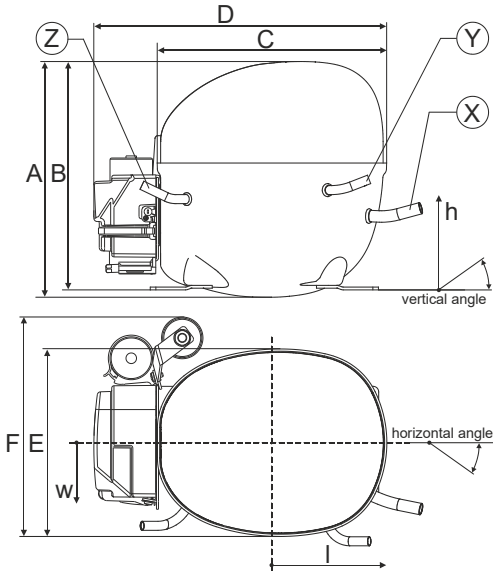


Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 8,11-8,29	øi 6,11-6,29	øi 6,11-6,29
(i:inside, o:outside) [in]	øi 0,32-0,33	øi 0,24-0,25	øi 0,24-0,25
Material	copper	copper	copper
Horizontal angle	±2° 11°	0°	0°
Vertical angle	±2° 15°	21°	25°
Position l/h/w [mm]	140/72/59	94/98/87	-109/93/74
	[in] 5,5/2,8/2,3	3,7/3,9/3,4	-4,3/3,7/2,9
Straight tube l. [mm]	12	12	12
	[in] 0,5	0,5	0,5

Compressor fixation


Bolt joint

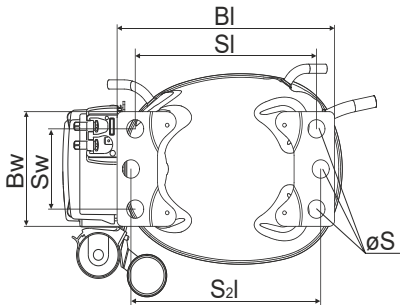

Baseplate	[mm]	[inch]
BI	204	8.03
Bw	100	3.94
Small holes	[mm]	[inch]
SI	170	6.7
Sw	70	2.76
S2l	178	7
øS	ø 16	ø 0.63



Snap-on



Mounting accessories	one comp.	multi pack
Bolt joint M6 ø16mm	118-1917	118-1918
Bolt joint ø1/4" ø16mm	118-1946	
Snap-on ø7,3 ø16mm	118-1947	118-1919

Application notes

Provision for PE Grounding is located at the PE Stamp on the compressor



Model					
Designation	NLE14LNDX	220-240V/50Hz	Conf. 1	Sales code:	105H7402

Configuration	Electrical accessories / wiring diagram				
Motor configuration	CSCR				
Power supply (nominal)	220-240V/50Hz 1~				
Refrigerant	R290				
Application	LBP				
Voltage range	198-254V				
Starting torque	HST				
Approvals	VDE				

Ambient/ machine room temperatures minimum /maximum

Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	fan 3m/s

Operation pressure range

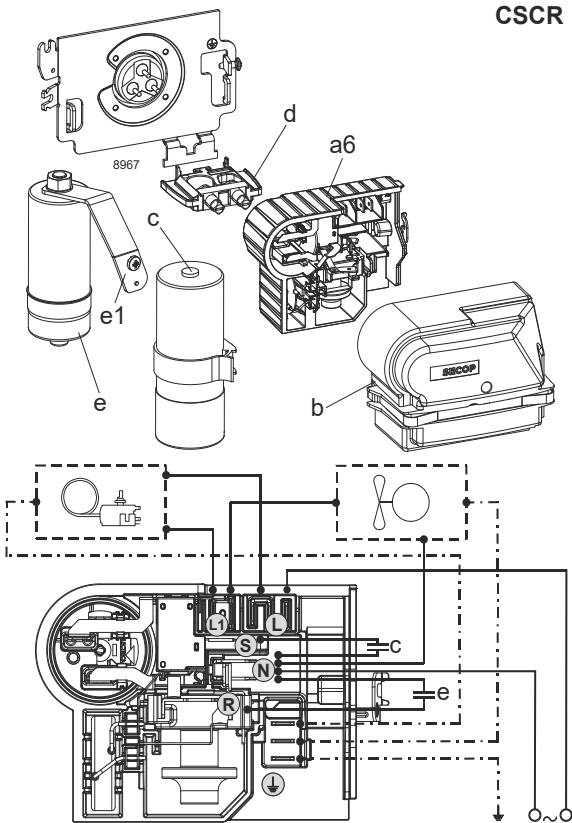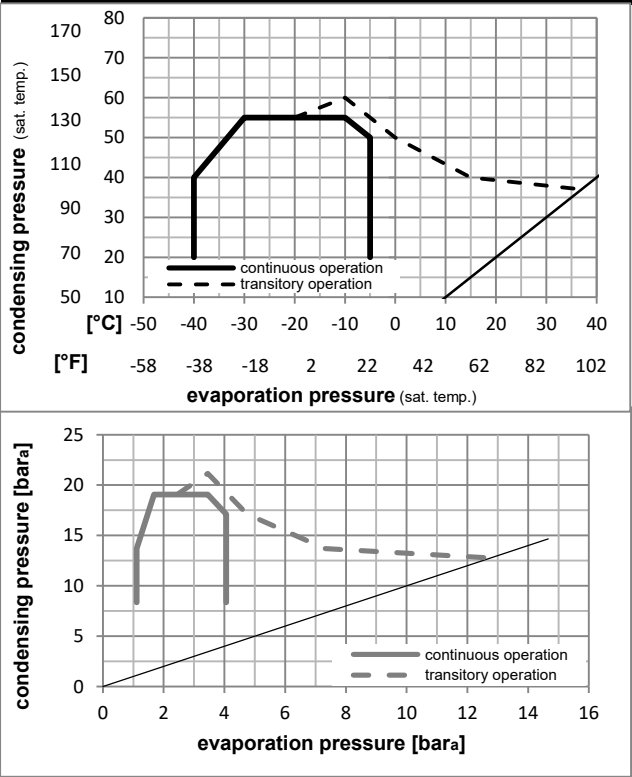

Components		
a6	NL starter kit	117U8201
c	start capacitor (80µF)	117U5353
e	run cap (10µF, 6.3mm,c.length 280mm)	117-7166
b	cover terminal board + clamp	117U1038
e1	retaining clamp	117-0314
	screw M4x8mm	117-0301
d	cord relief	103N1007

Model

Designation **NLE14LNDX** **220-240V/50Hz** Conf. 1 Sales code: **105H7402**

Optimization + standard conditions

R290, 220V/50Hz, CSCR, fan 3m/s, VDE

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)						Power consumption			
Return gas temp.					Liquid temp.						Current consumption			
Cooling capacity					COP		EER		P1		I		Ref. mass flow	
pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]		
[°C]	-23	54	32	32	713,5	2437	614,0	1,68	5,73	1,44	425,1	2,03	7,23	ASHRAE LBP
[°F]	-10	130	90	90										
[°C]	-25	55	32	55	537,4	1835	462,5	1,31	4,47	1,13	410,6	1,97	6,69	cecomaf LBP
[°F]	-13	131	90	131										
[°C]	-35	40	20	40	401,1	1370	345,2	1,35	4,61	1,16	297,2	1,51	4,58	EN12900 LBP
[°F]	-31	104	68	104										
[°C]	-23	49	4,4	49	573,5	1959	493,5	1,40	4,78	1,20	409,7	1,96	7,94	ARI540 LBP
[°F]	-10	120	40	120										
[°C]	-23	41	32	32	752,0	2568	647,2	1,96	6,68	1,68	384,6	1,85	7,61	AHAM LBP
[°F]	-10	105	90	90										
[°C]	-35	45	32	45	385,6	1317	331,8	1,26	4,31	1,09	305,4	1,54	4,32	opt
[°F]	-31	113	90	113										

Performance tables

R290, 220V/50Hz, CSCR, fan 3m/s, VDE

	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-40	-40	293,1	1001	252,3	1,10	3,75	0,94	267,2	1,41	3,28
cond. pressure	-35	-31	385,6	1317	331,8	1,26	4,31	1,09	305,4	1,54	4,32
pc= 45/113	-30	-22	493,5	1685	424,7	1,43	4,89	1,23	344,9	1,69	5,55
return gas temp.	-25	-13	618,6	2113	532,4	1,61	5,49	1,38	385,0	1,85	6,98
RGT= 32/90	-20	-4	762,7	2605	656,4	1,80	6,13	1,54	424,9	2,03	8,64
liquid temp	-15	5	927,5	3168	798,2	2,00	6,83	1,72	463,7	2,21	10,55
Tliq= 45/113	-5	23	1326,2	4529	1141,4	2,48	8,46	2,13	535,4	2,54	15,27
[°C / °F]	-40	-40	241,7	825	208,0	0,87	2,97	0,75	277,6	1,44	2,98
cond. pressure	-35	-31	327,0	1117	281,4	1,02	3,50	0,88	319,3	1,59	4,04
pc= 55/131	-30	-22	425,0	1451	365,7	1,17	3,99	1,01	363,9	1,77	5,27
return gas temp	-25	-13	537,4	1835	462,5	1,31	4,47	1,13	410,6	1,97	6,69
RGT= 32/90	-20	-4	666,0	2274	573,1	1,45	4,96	1,25	458,7	2,19	8,33
liquid temp	-15	5	812,5	2775	699,2	1,60	5,47	1,38	507,5	2,41	10,22
Tliq= 55/131	-5	23	1166,3	3983	1003,8	1,93	6,60	1,66	603,6	2,85	14,86



NLE Plus Compressors

SECCP

Keep electrical equipment clear from oil, chemicals, and water



When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

CSCR





NLE Plus Compressors

SECCP

Keep electrical equipment clear from oil, chemicals, and water



When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf (applies to all flammable refrigerants)



8545



Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.seccp.com**