Singolo
Imballi

Single Pack SCE18CNX 220-240V 50Hz CSCR

Codice Imballo Singolo: **195B4380**

Posizione	Titolo	Codice	Quantità
1	Compressor SCE18CNX	104H8840	1
2	SC starting device (550mm)	117-7806	1
3	Cord relief	103N1004	1
4	Bolt joint for one compressor | M6 | ø16mm	118-1917	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • **www.secop.com**

Secop non si assume alcuna responsabilità per eventuali errori presenti in cataloghi, brochure e altro materiale stampato. Secop si riserva il diritto di modificare i propri prodotti senza preavviso. Ciò vale anche per i prodotti già ordinati, a condizione che tali modifiche possano essere apportate senza che siano necessarie modifiche successive alle specifiche già concordate. Tutti i marchi presenti in questo materiale sono di proprietà delle rispettive aziende. Secop e il logo Secop sono marchi di Secop GmbH. Tutti i diritti sono riservati.

Model
SCE18CNX

Sales code:
104H8840

Compressor Data

Refrigerant(s)	**R290**
Refr. charge - tech. limit	**550g / 19.40oz**
Weight	**14.20 kg / 31.31lbs**
Displacement	**17.69 cm3 / 1.08cu.in**
Compressors on pallet	**80**

General – Configurations With SCE18CNX

–	**Conf. 1**
Motor configuration	CSCR
Power supply (nominal)	220-240 V/50 Hz
Number of phases	1
Voltage range	198-254 V
Approvals	VDE, CCC
Starting torque	HST
Refrigerant	R290
Application	LBP+MBP
Hot gas defrost	OK
Long interval pull down	OK

Application Notes

- Protector and cover are included and pre-assembled to compressor.
- Provision for PE Grounding is located at the PE Stamp on the compressor

Model
SCE18CNX

Sales code:
104H8840

Compressor Design

Oil type	**POE**	Winding resistance main	**4.07 Ohm**
Oil viscosity	**32cSt**	Winding resistance aux	**15.88 Ohm**
Oil quantity	**550 / 18.60fl.oz**	Max. winding temp.	**125 °C**
Free gas volume comp.	**1,460 cm3 / 49.37fl.oz**	Max. discharge temp.	**140°C / 284°F**
Motor protection	**external**		

Compressor Dimensions

Housing

A Height	**219mm / 8.62in**
B Height	**213mm / 8.39in**
C Length shell	**218mm / 8.58in**
D Length w. cover	**255mm / 10.04in**
E Width	**151mm / 5.94in**

Find 3D Model here



Connectors	Suction X	Discharge Y	Process Z
Diameter [mm]	øi 10.11–10.29 / 0.40–0.41in	øi 6.11–6.29 / 0.24–0.25in	øi 6.11–6.29 / 0.24–0.25in
Material	CU	CU	CU
Horizontal angle ±2°	37°	37°	143°
Vertical angle ±2°	30°	0°	150°
Position l/h/w [mm]	107/193/55 / 4.21/7.60/2.17in	115/110/63 / 4.53/4.33/2.48in	-107/193/55 / -4.21/7.60/2.17in
Straight tube l. [mm]	12 / 0.47in	12 / 0.47in	12 / 0.47in

Mounting Accessories

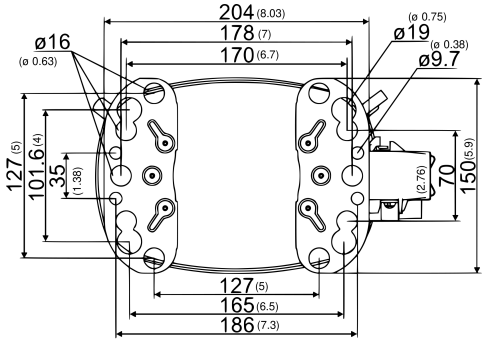

Dimensions in mm [in]

Bolt joint



Snap-on



	one comp.	multi pack
Bolt joint | M6 | ø16mm	118-1917	118-1918
Bolt joint | ø1/4" | ø16mm	118-1946	–
Bolt joint | ø1/4" | ø19mm	118-1949	–
Snap-on | ø7,3 | ø16mm	118-1947	118-1919

Model
SCE18CNX Configuration 1

Sales code:
104H8840

Configuration

Motor configuration	**CSCR**
Power supply (nominal)	**220-240 V/50 Hz 1~**
Refrigerant	**R290**
Application	**LBP+MBP**
Voltage range	**198-254 V**
Starting torque	**HST**
Approvals	**VDE, CCC**
Starting device type	**relay**
Run capacitor	**10 µF**
Start capacitor	**80 µF**
LRA (locked rotor amps / 4s/ U(N))	**17.47 A**
RLA (rated load amps / 1s/ U(N))	**2.92 A**
Cut in current (U(N))	**17.47 A**

Ambient/ machine room temperatures minimum /maximum
Ambient temperature range: 10 - 43°C / 50 - 109°F
Machine room temp. compressor: 10 - 48°C / 50 - 118°F

System Cooling
fan 3m/s

Electrical Accessories / Wiring Diagram

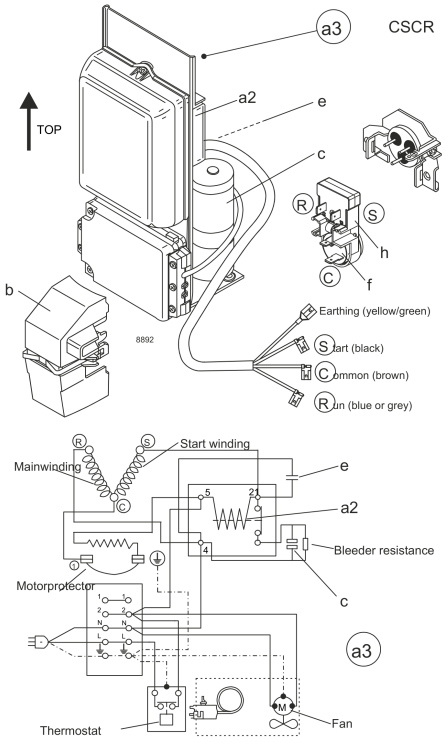

Components (protector + ~holder + cover: pre assembled)
a3 SC starter kit (550mm) 117-7806
f / h motor protector assy. (T1133) 117U8007
d cord relief 103N1004
b plastic cover + clamp 117U1033

Alternative components
a2 potential relay (RVA 4I3R A57) 117-7600
e run capacitor (10µF, 6.3mm) 117-7112
c start capacitor (80µF) 117U5373

Operation Pressure Range

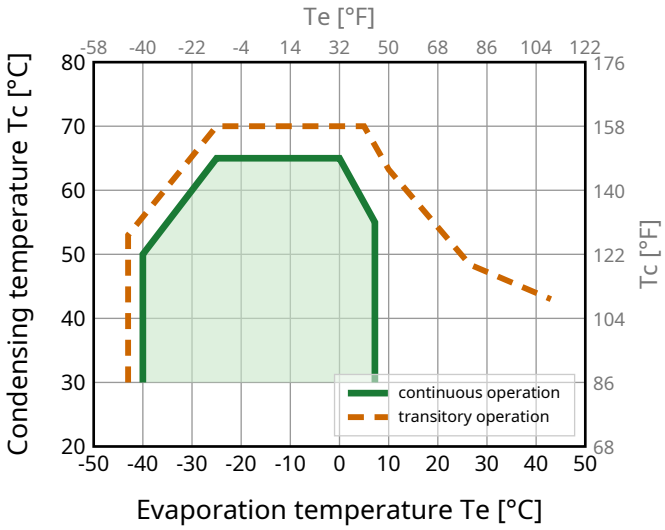

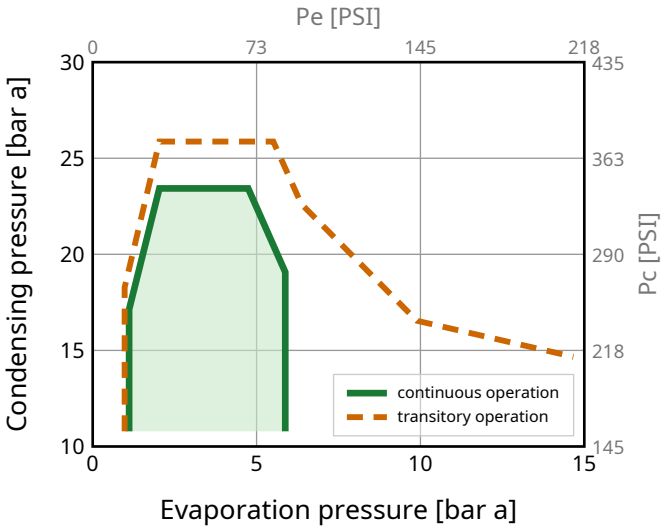

Model

SCE18CNX Configuration 1

Sales code:

104H8840

Standard Conditions

R290, 230 V/50 Hz, CSCR, fan 3m/s

pe	pc	RGT	Tliq	Cooling capacity			COP	EER	P	I	ṁ	
[°C] [°F]	[°C] [°F]	[°C] [°F]	[°C] [°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]	
-23.3 -10	54.4 129.9	32.2 90	32.2 90	**811**	2768	698	**1.64**	5.59	495	2.26	8.24	**ASHRAE LBP**
-25 -13	55 131	32 89.6	55 131	**597**	2036	513	**1.25**	4.28	476	2.18	7.48	**CECOMAF LBP**
-35 -31	40 104	20 68	40 104	**437**	1490	375	**1.24**	4.22	353	1.59	5.01	**EN12900 LBP**
-6.7 20	54.4 129.9	35 95	46.1 115	**1526**	5207	1313	**2.24**	7.65	681	3.04	17.47	**ASHRAE MBP**
-10 14	55 131	32 89.6	55 131	**1205**	4112	1037	**1.85**	6.33	650	2.92	15.33	**CECOMAF MBP**
-10 14	45 113	20 68	45 113	**1350**	4606	1161	**2.27**	7.73	596	2.65	16.61	**EN12900 MBP**

Performance Tables

R290, 230 V/50 Hz, CSCR, fan 3m/s

pc= 45/113 | RGT= 32/89.6 | Tliq= 45/113 | °C/°F

pe		Cooling capacity			COP	EER	P	I	ṁ
[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[W]	[A]	[kg/h]
-40	-40	**302**	1030	260	**0.97**	3.31	311	1.34	3.39
-30	-22	**547**	1867	471	**1.34**	4.59	407	1.83	6.18
-20	-4	**911**	3107	783	**1.80**	6.13	506	2.28	10.36
-10	14	**1403**	4788	1207	**2.36**	8.04	596	2.65	16.11
0	32	**2036**	6947	1751	**3.08**	10.50	662	2.92	23.67
7.2	45	**2585**	8819	2223	**3.76**	12.82	688	3.04	30.41

pc= 55/131 | RGT= 32/89.6 | Tliq= 55/131 | °C/°F

-40	-40	**219**	748	188	**0.71**	2.44	306	1.36	2.72
-30	-22	**447**	1525	384	**1.07**	3.66	417	1.91	5.58
-20	-4	**772**	2634	664	**1.44**	4.92	536	2.44	9.72
-10	14	**1205**	4112	1037	**1.85**	6.33	650	2.92	15.33
0	32	**1758**	5998	1512	**2.35**	8.03	747	3.32	22.67
7.2	45	**2236**	7630	1923	**2.80**	9.56	798	3.55	29.21

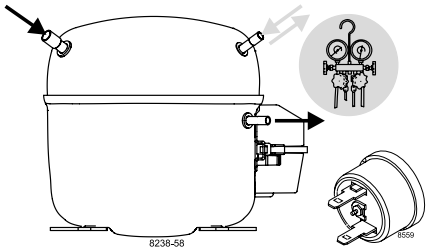

SCE Compressors
(External Protector)

SECOP

Keep electrical equipment clear from <u>oil, chemicals, and water</u>

When operated with a <u>flammable refrigerant,</u> only <u>spark-proof starting equipment</u> is allowed.

CSIR

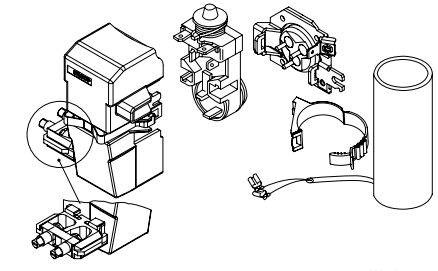

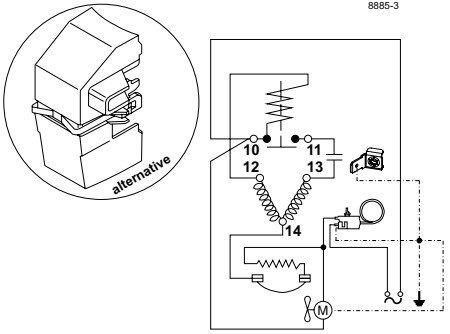

CSCR

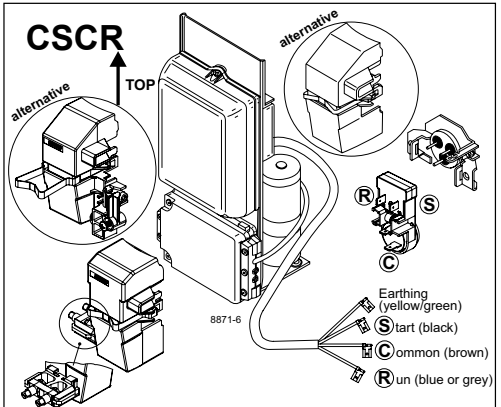



	S	C	R
ENGLISH	Black	Brown	Blue or grey
DEUTSCH	Schwarz	Braun	Blau od. grau
FRANÇAIS	Noir	Marron	Bleu ou gris
ESPAÑOL	Negro	Marrón	Azul o gris
ITALIANO	Nero	Marrone	Blu o grigio
NEDERLANDS	Zwart	Bruin	Blauw of grijs
РУССКИЙ	Чёрный	Корич-невый	Синий или серый
中文	黑色	棕色	蓝色或灰色

CSCR

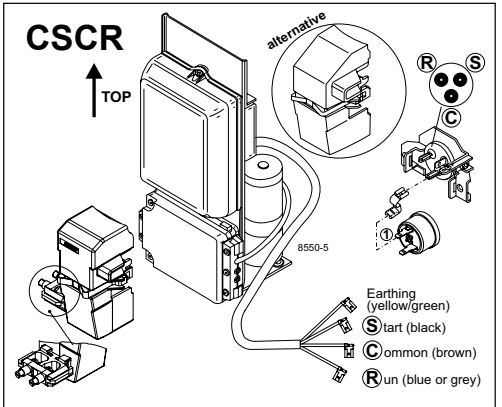



	S	C	R
ENGLISH	Black	Brown	Blue or grey
DEUTSCH	Schwarz	Braun	Blau od. grau
FRANÇAIS	Noir	Marron	Bleu ou gris
ESPAÑOL	Negro	Marrón	Azul o gris
ITALIANO	Nero	Marrone	Blu o grigio
NEDERLANDS	Zwart	Bruin	Blauw of grijs
РУССКИЙ	Чёрный	Корич-невый	Синий или серый
中文	黑色	棕色	蓝色或灰色

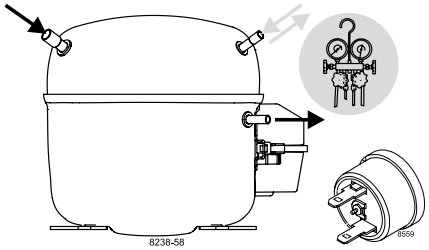

SCE Compressors
(External Protector)

SECOP

Keep electrical equipment clear from oil, chemicals, and water

When operated with a flammable refrigerant, only spark-proof starting equipment is allowed.

Service/Repair – R290, R600a, R170, R1270, R1234yf
(applies to all flammable refrigerants)

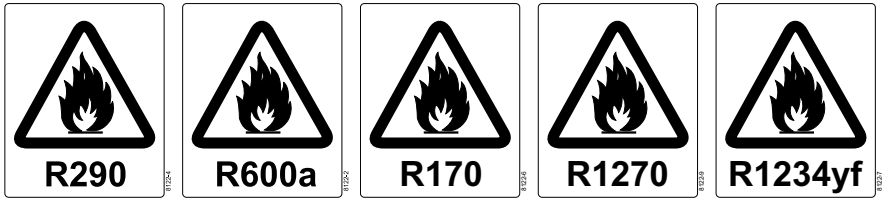

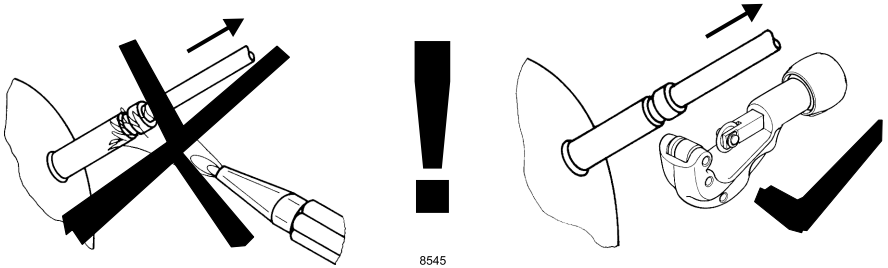

Brazing on Suction Connectors (Direct Intake)



! max. 350°C/662°F !
at socket

brazing solder: phosphor (LP7) or silver

Refer to Product Bulletin:
Brazing on Suction Connectors
(SCE Compressors with Direct Suction Intake)

Dismantling, recycling, disposal: At the end of a compressor's lifecycle, proceed by separating and storing components according to their environmental impact. Parts that may cause pollution must be clearly identified and handled separately, ensuring appropriate disposal. Refrigerant gas must not be released into the environment and should be recovered by qualified operators. Compressor oil must also be collected separately. The compressor should be disposed of at specialized disposal centers in accordance with the applicable regulations. **Subject to modifications/alterations. www.secop.com**